


# Geomorphic Assessment and Sand Transport Impacts Analysis of the Colorado River Sub Station

Prepared for  
California Public Utilities Commission  
and Aspen Environmental

Revised February 2, 2011

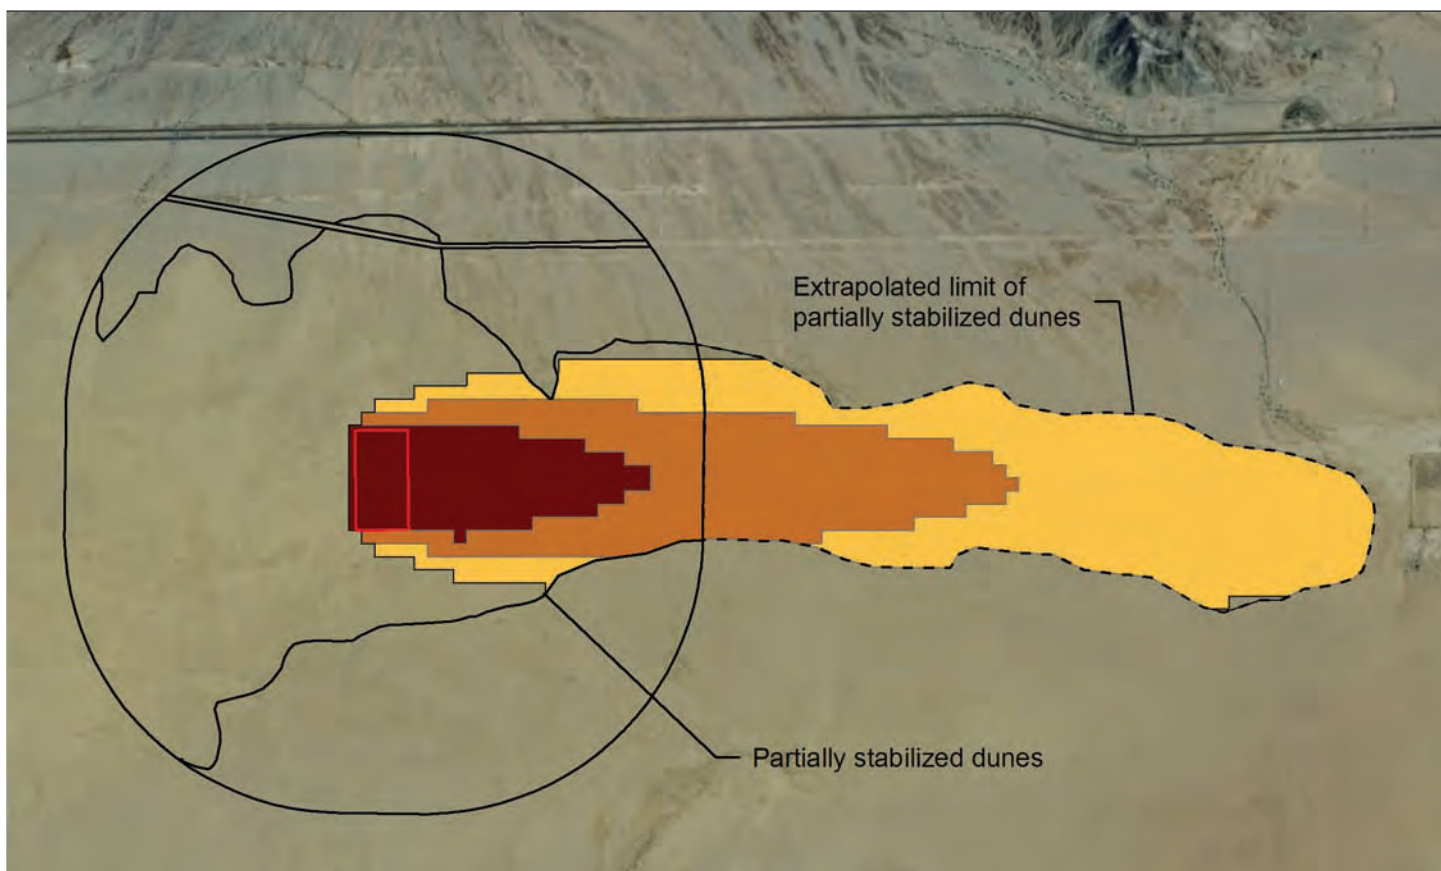

*Services provided pursuant to this Agreement are intended solely for the use and benefit of the California Public Utilities Commission and Aspen Environmental. No other person or entity shall be entitled to rely on the services, opinions, recommendations, plans or specifications provided pursuant to this agreement without the express written consent of Philip Williams & Associates, Ltd., 550 Kearny Street, Suite 900, San Francisco, CA 94108.*

## TABLE OF CONTENTS

	<u>Page No.</u>
<b>1. OBJECTIVES OF THIS APPENDIX</b>	<b>1</b>
<b>2. SUMMARY OF KEY FINDINGS</b>	<b>1</b>
<b>3. RELATIONSHIP BETWEEN HYDRO-GEOMORPHIC PROCESSES AND BIOLOGICAL RESOURCES</b>	<b>2</b>
<b>4. DESCRIPTION OF THE CRSS PROJECT SITE</b>	<b>8</b>
4.1    IDENTIFYING THE EXTENT OF MFTL HABITAT	9
4.2    MAJOR LAND UNITS	11
<b>5. ASSESSING THE IMPACTS OF THE PROJECT ON SAND TRANSPORT TO DUNE HABITAT</b>	<b>13</b>
5.1    BACKGROUND AND DEFINITION OF SAND SHADOWS	13
5.2    DESCRIPTION OF THE ESA PWA SAND TRANSPORT MODEL	13
5.2.1    Model Theory	13
5.2.2    Computational Framework for the Sand Transport Model	14
5.2.3    Assigning primary and secondary sand transport directions to the model	15
5.2.4    Upwind boundary condition	16
5.3    SIMULATION OF PROJECT ALTERNATIVES	16
5.4    DISCUSSION OF RESULTS	26
<b>6. REFERENCES</b>	<b>27</b>
<b>7. LIST OF PREPARERS</b>	<b>28</b>
<b>8. APPENDIX A – EXCERPTS FROM KENNEY, M. 2010. PRELIMINARY GEOMORPHIC AEOLIAN REPORT: COLORADO RIVER SUBSTATION, RIVERSIDE COUNTY, CA</b>	<b>29</b>

## 1. OBJECTIVES OF THIS APPENDIX

The Colorado River Sub Station Project (Project or Proposed Project) is a proposed electricity substation to support a number of nearby solar energy projects. The project site is located in the Chuckwalla Valley of the Mojave Desert. This area supports a series of sand dune habitats that are reliant on the delivery of fine sand from wind (aeolian) and water (fluvial) sources. The objectives of this Appendix are to:

1. Provide a brief description of the Project area's sand dunes and a discussion of the sand transport processes that created and now maintain the existing dunes.
2. Provide a discussion of potential direct and indirect impacts of the Proposed Project and its alternatives on the existing sand dune system and the processes that support them.
3. Describe mitigation for those impacts, or a well-supported conclusion that those impacts cannot be mitigated.

## 2. SUMMARY OF KEY FINDINGS

The Proposed Project area is located in the most active part of the Chuckwalla sand transport corridor, a regionally-significant geomorphic feature that transports sand by wind action to a series of sand dune habitat areas that support Mojave Fringe Toed Lizards (MFTL). In addition to directly impacting an area of sand dunes, the project will block wind transport of sand and will create a 'sand shadow' downwind (east) of the site. **Sand shadows are areas where the upwind supply of sand is cut off by wind fences and other infrastructure, but where existing sand can be eroded downwind, resulting in the loss of the fine sand upon which dune habitats are dependent.** Previous studies have shown that such sand shadows result in dune deflation, substrate coarsening and complete loss of MFTL habitat within a period from a few months to a few years (Griffith et al. 2002; Turner et al. 1984). Sand transport modeling results indicate that if implemented the CRSS 500 kV Expansion Project in its originally intended location (Alternative 1) would create a total of 90 acres of direct impact to dune areas within the sand transport corridor and 1,365 acres of indirect (sand shadow) impacts downwind of the Project where we would expect to see deflation and dune loss within the life of the Project. Other locations and configurations analyzed as part of this study would create 10 - 120 acres of direct impacts and 10-1,280 acres of indirect impacts. Calculated direct and indirect impacts for each alternative are summarized in Table 1.

### 3. RELATIONSHIP BETWEEN HYDRO-GEOMORPHIC PROCESSES AND BIOLOGICAL RESOURCES

This Appendix focuses on several hydro-geomorphic processes that play a significant role in the health of the ecosystem of the Project site and its surroundings. These processes are wind transportation of sand relative to the creation, preservation and destruction of sand dunes, and water transport of sediment through the alluvial fan drainage system.

Sand dune fauna such as MFTL rely on a regular supply of fine wind blown sand for their habitat (Figure 1). Active sand dunes (dunes that have an active layer of mobile sand) exist in a state of dynamic equilibrium: they are continuously losing sand downwind due to erosion and transport, but that is offset by supplies of new sand from upwind (see Figure 2). If the sand supply is cut off the dunes *deflate*; that is to say they lose sand downwind and shrink in size and depth (see Figure 3 for an example). The finest sand (which is most easily transported) is lost first with coarser sand and gravel being left behind to form an armor or lag. This combination of lag and thin sand deposits does not support many dune-dependent species. For example, Turner et al (1984) conducted experiments on paired plots of sand dunes up and downwind of wind barriers to look at abundance of MFTL. They showed that downwind sand dunes experienced deflation within 4-17 years of the erection of a relatively small wind barrier (a single line of tamarisk trees) and that while MFTL were abundant upwind of the barriers they were virtually absent downwind. Thus barriers pose a direct threat to sand transport and habitat.

Maintaining MFTL habitat requires the regular addition of wind-blown sand from a reliable source. Most of the sand dune habitat in the Mojave Desert follows discrete pathways referred to as sand transport corridors. These have been approximately mapped by Muhs et al. (2003) and are shown relative to the Project site in Figures 4 and 5. The presence and location of sand transport corridors are controlled by the availability of sand that can be eroded and transported by wind, the prevailing wind direction, and topography (especially the presence of fault-controlled troughs). Most sand corridors trend approximately northwest to southeast along troughs. Additional sand is added to corridors from local wind corridors that can be thought of as ‘sand corridor tributaries’ and by fluvial sources. Alluvial fan channels transport sand from the mountain fronts to the troughs. With increasing distance away from the mountain front the sand is preferentially sorted<sup>1</sup> and reduced in size by abrasion. At a sufficient distance down-fan sediment becomes fine enough to be picked up and transported by wind action. This creates local dune habitat around ephemeral channels and supplies material downwind to accumulate in larger sand corridors.

---

<sup>1</sup> “Preferential sorting”. Alluvial fans are made up of distributary drainage systems that spread water into increasing numbers of smaller channels as water moves downstream (the opposite of most temperate drainage networks). As water spreads out the channels lose sediment transport capacity and the coarsest particles are deposited first, with successively smaller particles being passed downstream.



**Figure 1. Mojave Fringe Toed Lizard showing its preferred habitat of fine, loose sand.**  
*Source: Southwest Images*



**Figure 2. Good MFTL habitat showing 'plump', vegetated dunes connected by relatively deep, loose sand sheets**



**Figure 3. Deflated former vegetated dune showing remnants of eroding dune under creosote bushes surrounded by an armored lag of coarse gravel and shallow, compacted sand. This habitat does not support MFTL.**

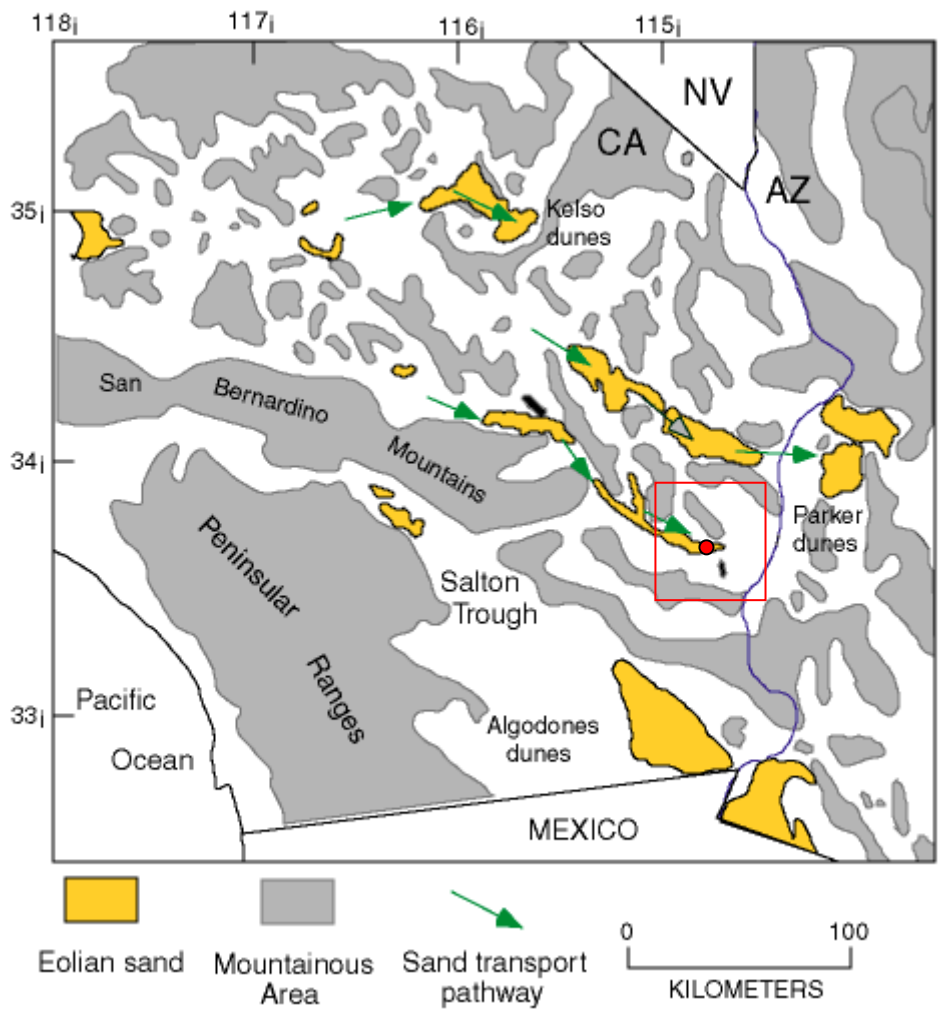


Figure 4. Eolian sand transport corridors of southern California (original figure from Muhs et. al., 2003). Approximate Project location shown by red dot. Area shown in Figure 5 illustrated by red box.





Source: ESRI, Inc.

figure 5

CRSS Sand Transport Analysis

Vicinity of the CRSS project site (shown in red) showing the surrounding wind transport corridor (pale brown zone trending from west to east)

PWA Ref# -




The Proposed Project is located inside a major sand transport corridor identified by Muhs et. al. (2003), referred to as the Chuckwalla sand corridor. The sand corridors are prominent in aerial photos (see Figures 5 and 6). Sand delivered from upwind passes through dune areas including MFTL habitat and is deposited, replenishing sand that has been lost downwind. In addition to the obvious biological impact of constructing a project in a dune area (direct loss of habitat), construction activities have two potential offsite impacts on sand transport corridors. Firstly, if the project footprint is constructed in a dune area it will cut off a supply of sand that would otherwise have been transported downwind to other dune areas. Dunes downwind of a constructed site will deflate over time as sand output is not matched by sand input. Secondly, new sand that would have been transported across the project footprint from upwind will potentially be cut off by drainage ditches, wind fences and above ground infrastructure. Thus, if a project is built into a wind corridor it will create a 'sand shadow' area where dune deflation occurs over time.


The level of activity and precise location of sand transport corridors is not fixed in time or space. Fluvial delivery of sediment from mountain fronts to the alluvial fans, troughs and playas tends to occur in wet winters associated with El Niño events that occur on average every three to five years. Due to the wet conditions wind transport may be less active during these years, so sediment may be temporarily stored in downstream channel areas or playas. During La Niña events (also approximately every three to five years) winters tend to be drier, promoting wind transport and aeolian processes. Fluvially-delivered sand deposited in channels or playas during an El Niño event can be transported by the wind during a subsequent La Niña event. In an analogous manner, sand corridors can expand, contract or migrate with changing weather and climate. Wetter than average conditions may allow vegetation to encroach on the edges of a sand transport corridor, thinning it. Drier or windier condition may add more sand to the corridor and bury vegetation, widening the corridor. Changes in prevailing wind direction or strength may change the location or intensity of sand transport.

#### 4. DESCRIPTION OF THE CRSS PROJECT SITE

The CRSS site is located at the foot of an alluvial fan that drains from north to south, close to the axis of the Chuckwalla Valley. The project footprint is located in a series of sand dunes that are part of the Chuckwalla sand transport corridor, which trends from west to east across the site, before losing definition approximately 3.5 miles east of the site. The sand transport corridor is shown generally by Muhs et al. (2003) and has been mapped in more detail by the project applicant (Figure 7, Kenney, 2010). It is also shown by the presence of “stabilized and partially stabilized desert dunes” in the soils data provided by the CRSS applicant (Figure 8).

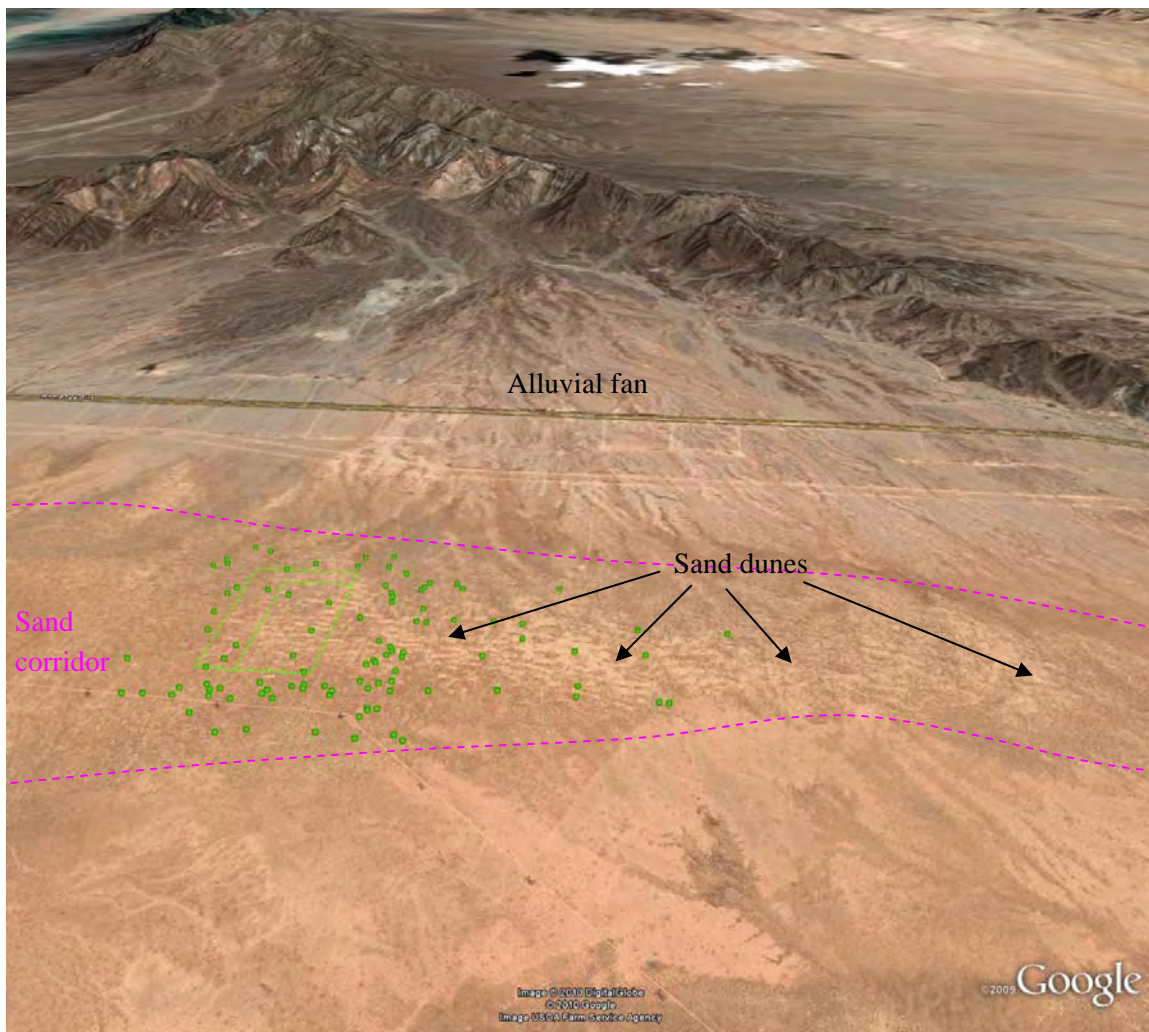

**Figure 6. Setting of the CRSS Project site showing the major topographic units. Project boundary shown by green lines, Mojave Fringe Toed Lizard occurrences within project vicinity shown as green dots. Wind transport corridor shown in pink.**



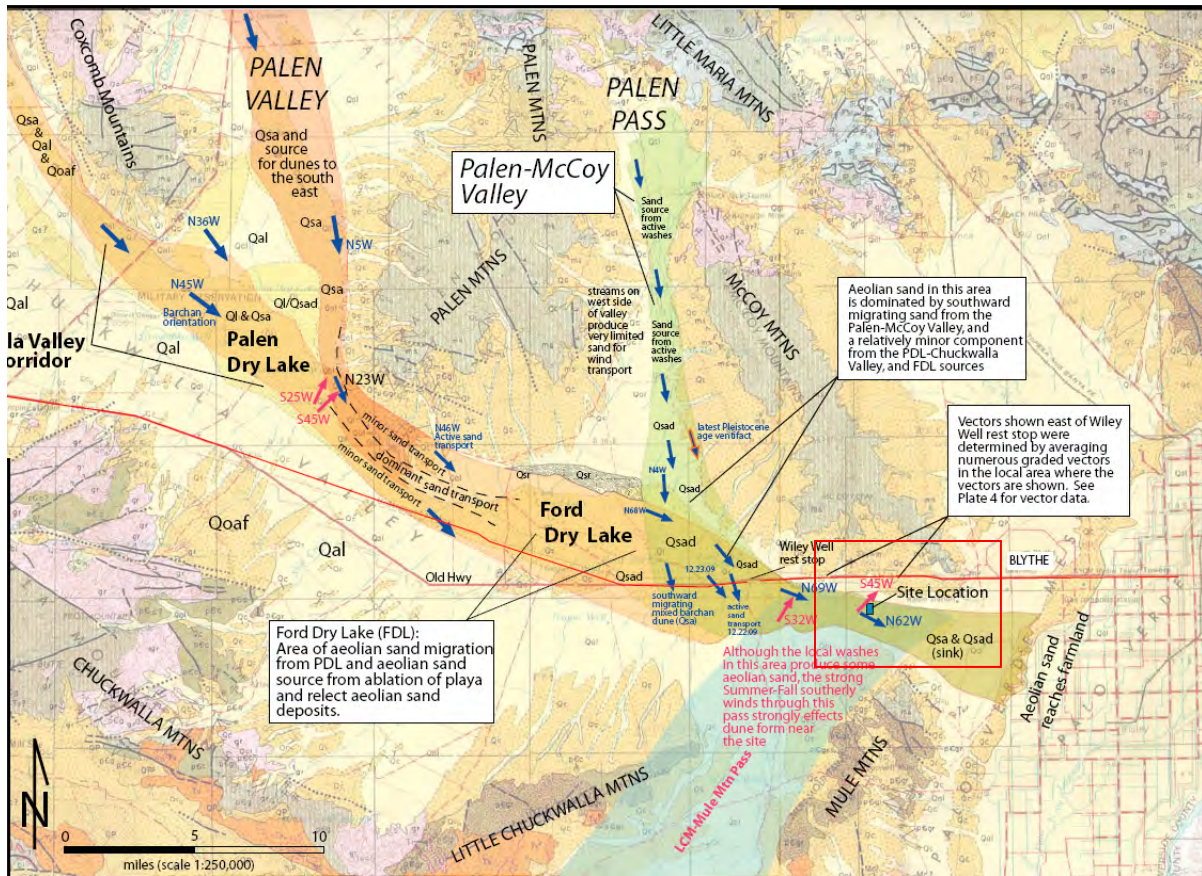


**Figure 7. Sand migration corridors mapped by Miles Kenney (Plate 2, Kenney, 2010) as part of the applicant’s submittal. Site area highlighted in red box.**

The applicant’s geomorphic report makes it very clear that the project site is located in the zone of highest sand transport at the center of the sand transport corridor (mapped as Qsa). Plate 5 (Kenney, 2010) shows the relative zones of sand transport, with the project occupying most of the width of the most active zone. Plate 8 shows typical conditions at the project site and in the area immediately downwind.

#### 4.1 IDENTIFYING THE EXTENT OF MFTL HABITAT

It became clear during model set up that the area of indirect impact would likely extend beyond the one mile buffer within which the applicant mapped MFTL dune habitat. We extrapolated the area of dune habitat by comparing the visual signature of the dune habitat where MFTL were observed with the surrounding areas beyond the one mile buffer. Based on this we mapped the continued MFTL habitat area to the east (see Figure 8).

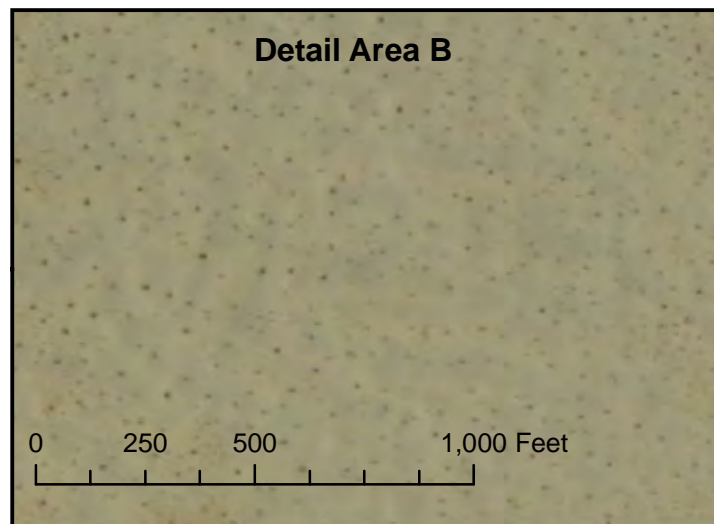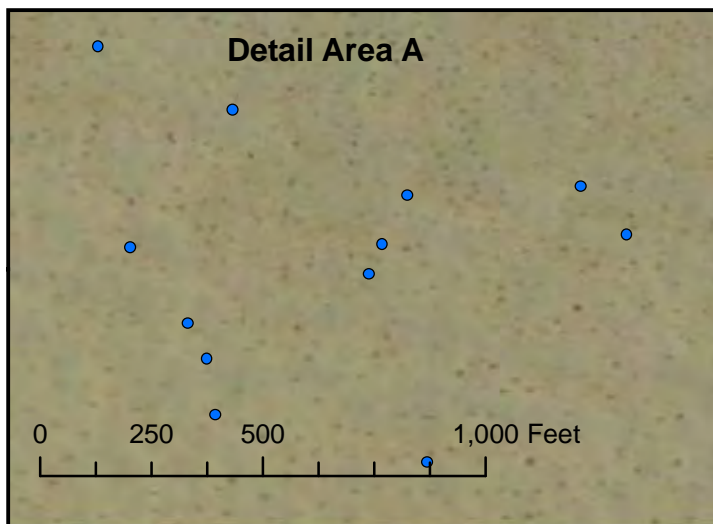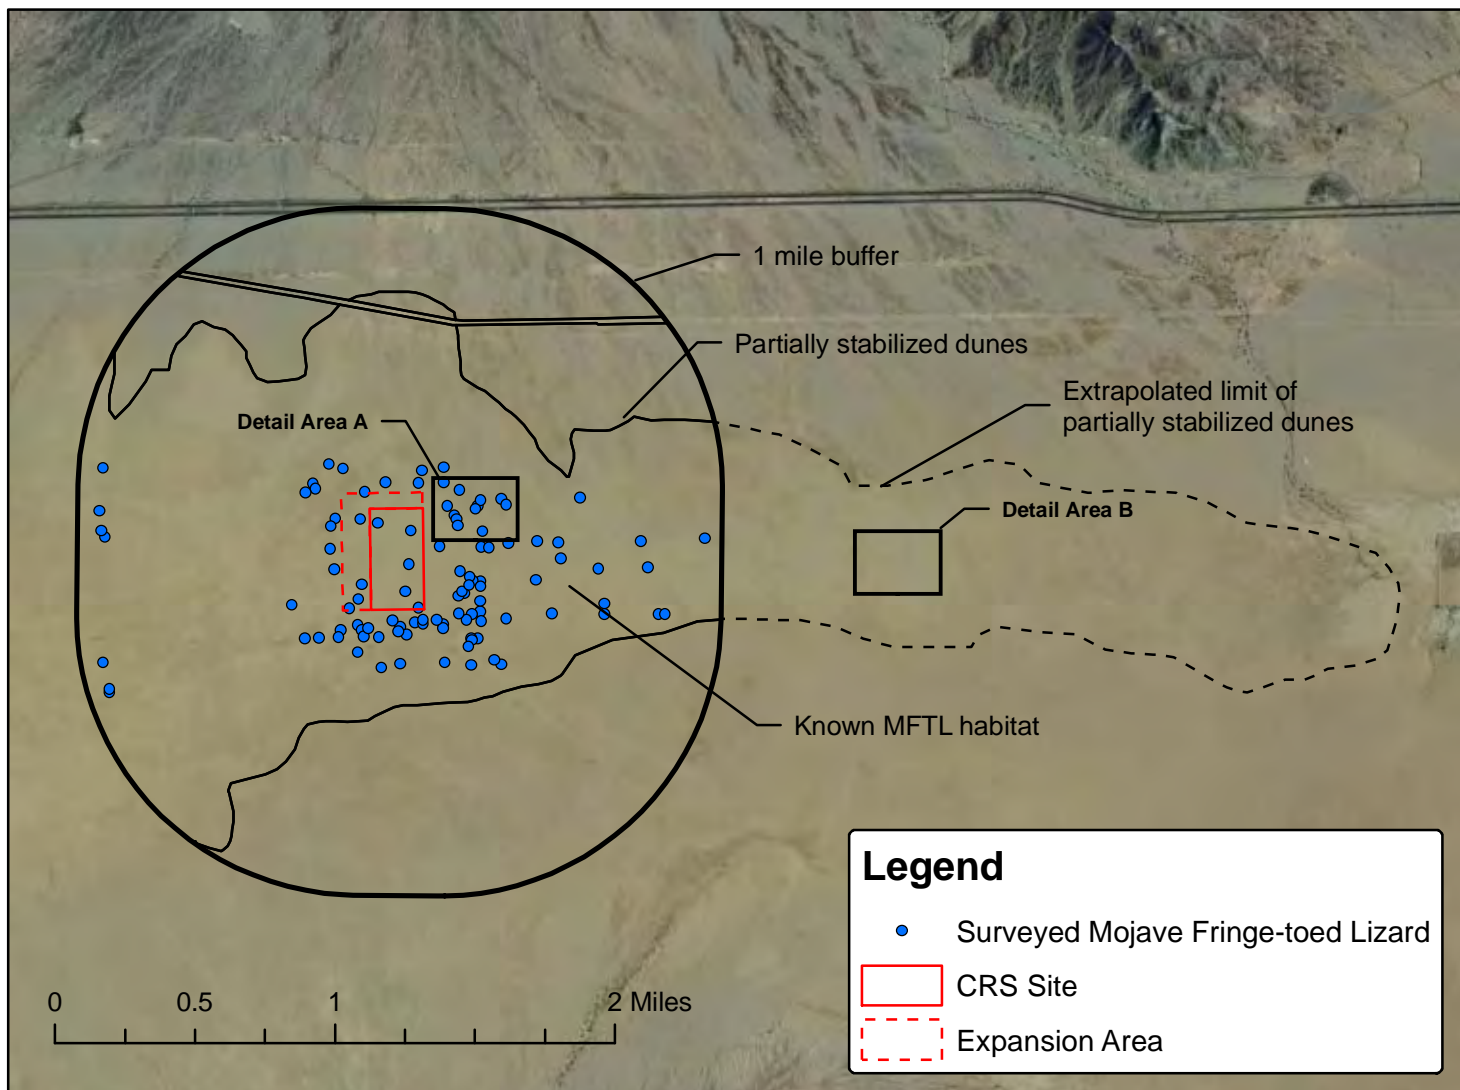

Source: ESRI, Inc., AECOM

Note:



figure 8

CRSS Sand Analysis

Project site showing the correlation between dunes and MFTL occurrences and the continued presence of identical dunes to the east of the one-mile buffer zone.

PWA Ref# - 2039.00



## 4.2 MAJOR LAND UNITS

As part of the Genesis Solar Energy Project assessment for the California Energy Commission ESA PWA visited the project vicinity in January 2010 (including the Wiley Wells truck stop located 5 miles west of the project site). The geologic units around Wiley Wells are the same (Quaternary sand dunes) as in the project site, and comparison using aerial photography confirmed that the morphology and land cover are similar. The following description is based on descriptions from that site and the applicant's description of the project site (Kenney, 2010).

### Qsad Stabilized Dunes

These are areas of late Pleistocene to late Holocene sand dunes that have been partially stabilized by sparse grasses but that still display evidence of active sand transport.



**Figure 9. Vegetated sand dunes in the sand transportation corridor mostly upwind (west) of the project footprint, with close up of ground surface**

This unit makes up the area surrounding the project boundary. This unit is MFTL habitat as shown by the applicant's maps, and has evidence of active wind transport of sand (for example 'plumper' vegetated dunes, coppice dunes indicating active sand movement, deeper sheets of sand with ripples). This area is part of the Chuckwalla Valley sand transport corridor.

Qsa Active Quaternary Sand Areas

These are areas of more active sand transport that exhibit evidence of higher levels of sand transport including coppice dunes and extensive areas of sand sheet with ripples.



**Figure 10. Active sand dunes north of Wiley Wells Rest Stop**



**Figure 11. Coppice dunes indicating active sand transport near Wiley Wells Rest Stop.**

## **5. ASSESSING THE IMPACTS OF THE PROJECT ON SAND TRANSPORT TO DUNE HABITAT**

### **5.1 BACKGROUND AND DEFINITION OF SAND SHADOWS**

The primary off-site impact is disruption of sand transport to the sand transport corridor. The Project has the potential to disrupt the Chuckwalla wind transport corridor because it presents a ground-level boundary to sand movement. Most sand transport (as opposed to dust transport) occurs close to the ground through the processes of rolling and saltation (bouncing of sand particles). For example, Bagnold (1941) found that the mean elevation of saltating sand grains with a diameter of 0.25 mm was less than 1 cm off the ground, and more recent research has found that 90 percent of sand transport occurs within 30 cm of the ground surface. We would therefore expect the project to pose an effective barrier to sand transport, and create a sand shadow downwind.

A sand shadow is an area downwind of a sand barrier where the wind is able to remove fine sand but there is no replacement by sand from upwind. Over time existing sand dunes in a shadow area will be deflated – they will shrink and become thinner and coarser as the fine sand is blown away by the wind. Deflated dunes have little or no habitat value for MFTL and other fine sand dependent species.

### **5.2 DESCRIPTION OF THE ESA PWA SAND TRANSPORT MODEL**

In order to quantitatively assess the area of sand shadow associated with different Project alternatives ESA PWA developed a numerical model of sand transport. The model predicts areas of sand shadow in response to inputs of prevailing wind direction, distribution of wind around that mean, and the location of sand barriers.

#### **5.2.1 Model Theory**


Sand transport occurs when wind speed exceeds a threshold velocity that varies with material size but is often assumed to be around 14 miles per hour. Sand is transported in whatever direction the wind is traveling once it exceeds the threshold velocity. Over time a prevailing direction emerges, and sand dunes reflect that prevailing direction (for example, coppice<sup>2</sup> dunes develop tails that are oriented away from the prevailing wind that transports sand). However, the prevailing wind is the resultant vector of numerous wind events with different orientations. This is illustrated in Figure 12, which shows the distribution of wind with differing speeds and the resulting prevailing wind transport direction for Blythe. Because of the variations in wind direction over a year sand transport can be thought of as two processes: primary sand migration that follows the prevailing

---

<sup>2</sup> Coppice dunes are small dunes that form around vegetation with a ‘teardrop’ shape that is oriented with the blunt end facing into the prevailing wind. They indicate the prevailing direction of wind transport.




wind direction, and sand diffusion on either side around that main direction. Sand diffusion means that the edge of a wind shadow will not be sharply defined into zones of complete sand transport and zones of zero transport; it will have a gradation from areas where there is a complete loss of sand to areas where there will be no reduction in sand.

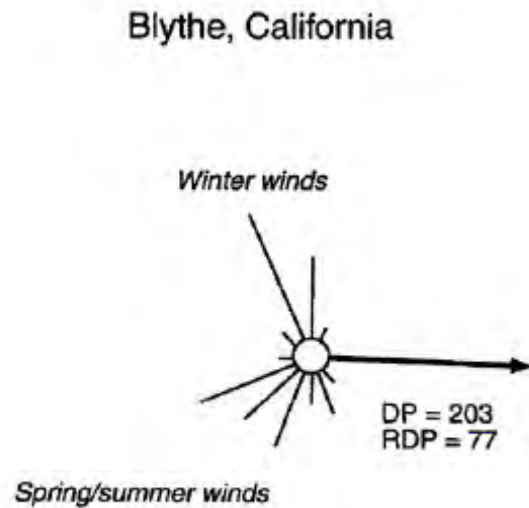

**Figure 12. Example wind vectors for Blythe airport. Dominant winds (lines without arrows) are mostly from the northwest in winter and the southwest in summer, but the resulting prevailing wind for sand transport (bold arrow) is to the east. Source: Muhs et. al. (2003). DP stands for “Drift Potential”, the sum of winds from a given direction that exceed the threshold velocity. RDP stands for “Resultant Drift Potential” which is the vector (direction and magnitude) that results from summing all the DPs.**

### 5.2.2 Computational Framework for the Sand Transport Model

We have developed a sand transport model for the CRSS site to simulate this combination of downwind transport and lateral diffusion. The model superimposes a 200 x 200 cell framework over the Project site and its surroundings and calculates the percentage of sand that will move from each cell to its neighbors based on the distribution of effective wind directions (Figure 13).



**Figure 13. Calculation matrix for sand transport model. Length of arrows indicates proportion of sand moving to each cell from cell 5. In the example shown wind transport is mostly from the northwest and the southwest, but some diffusion occurs in other directions to represent occasional winds in these directions. The resultant prevailing sand transport direction is eastwards. The calculation is carried out for each cell in turn traveling downwind. The brown line is the upwind boundary condition.**

Sand is added to the cells at the upwind boundary (brown line in Figure 13). Sand is transported from each cell in turn to each of its eight surrounding cells based on the intensity and duration of winds >14 mph in each direction. For example, if 50 percent of the effective wind energy is from the northwest, 50 percent of the sand in cell 5 will be transferred to cell 9 in the example above.

### 5.2.3 Assigning primary and secondary sand transport directions to the model

There is no weather station at the CRSS site to parameterize the model, but we have conducted simulations that identify the primary sand transport direction from aerial photos of the field site with a distribution of secondary wind directions based on the data for Blythe airport Muhs et. al. (2003). We assigned two primary wind directions to the model to reflect conditions at the CRSS site, with sand primarily coming from the northwest and the southwest (similar to the Blythe weather station and the applicant’s sand transport report (Kenney, 2010)). Thus the primary resultant sand transport direction is to east. We analyzed the Blythe airport weather station wind drift potential data to estimate a diffusion function to account for wind transport in other directions. We measured all the drift potential<sup>3</sup> vectors and calculated the percentage that were in the two primary wind directions and the percentages that were in all other directions. For Blythe airport the split is 70 percent from the two primary directions (northwest and southwest) with 30 percent of the drift potential being made up of wind from other directions. Blythe and CRSS have slightly different prevailing wind directions due to topographic influences from their respective valleys, but we assumed the same approximate split between the duration and intensity of primary wind transport and secondary transport. We adopted these proportions to the cells in the CRSS

---

<sup>3</sup> Drift potential is the duration of wind transport multiplied by the velocity for times when the velocity exceeds 14 mph (the typical transport threshold of sand).

model so that approximately 70 percent of sand is transported to the two cells representing the two primary wind directions with 30 percent going to the surrounding 6 cells – see Figure 14.

5%	5%	35%
5%	0%	5%
5%	5%	35%

**Figure 14. Example calculation matrix for the sand transport model showing sand proportions transported in each direction. The black arrow shows the resultant transport vector of 90 degrees (east) across the Project site.**

#### 5.2.4 Upwind boundary condition

We simulated a uniform input of sand across the western (upwind) edge of the model within the wind corridor (as denoted by the ‘stabilized and partially stabilized desert dune GIS layer provided by the applicant) with no sand entering the computational matrix north or south of this line. This is a simplification of the actual pattern of sand distribution (which likely shows zones of differing sand transport rate as described by Kenney (2010) but it captures the main sand corridor. Since we are concerned with relative reductions in sand transport rate rather than absolute values this was felt to be a reasonable simplification.

### 5.3 SIMULATION OF PROJECT ALTERNATIVES

We simulated several Project alternatives, all based on the footprint of the 500 kV expansion project:

Alternative 1. The CRSS 500 kV Expansion Project in its original location

Alternative 1a. The CRSS 500 kV Expansion Project in its original location with a sand deflector on the upwind boundary fence

Alternative 2. The CRSS 500 kV Expansion Project reoriented 90° to present the narrow side across the sand corridor

Alternative 2a. The CRSS 500 kV Expansion Project reoriented 90° to present the narrow side across the sand corridor and with the addition of a sand deflector on the upwind boundary fence

Alternative 3. The CRSS 500 kV Expansion Project relocated south to be almost completely out of the sand corridor

Alternative 3a. The CRSS 500 kV Expansion Project reoriented at 45° to encourage sand to pass around the boundary


For the first scenario we imported the Project footprint into the model in GIS. For subsequent simulations we took the footprint and relocated or rotated it with the same surface area. We also conducted a series of simulations where we added a fence oriented 45° to the prevailing sand transport direction at the upwind project boundary to deflect sand around the project site.

For the existing conditions assessment we simulated the sand corridor without any project, to determine that the existing conditions sand corridor matched the observed pattern of sand dunes from aerial photos. This simulation (Figure 15) provided a baseline against which to assess the project. Comparison of the predicted sand concentration relative to the mapped limits of the sand transport corridor suggests the baseline condition was a reasonable representation of the process. For the proposed conditions we used the same sand input distribution but added the project. Project boundaries that are perpendicular to the prevailing sand transport direction were assumed to be a complete barrier to sand transport, with zero sand being transported across a project cell. We modified the model to allow sand to migrate along project boundaries that were at 45° or more acute to the prevailing sand transport direction. In these cases we assume that sand strikes the boundary fence and then migrates along it until it reaches the downwind limit of the project, at which point the sand is free to move in the directions determined by the range of wind conditions.

Areas where the project footprint overlays sand dunes are recorded as direct impact areas. Areas downwind of the project where there is a greater than 25% reduction in sand delivery are considered to be indirect impact areas. In all Alternatives the model predicted a sand transport shadow downwind of the Project based on the prevailing wind direction, with diffusion gradually transporting sand into the shadow (due to variations around the prevailing wind direction). At a certain point downwind the shadow disappears because diffusion is able to bring sediment back into the area downwind of the obstruction. We calculated the percentage of sand reduction between pre-project and post-project conditions. By overlying the percent sand reduction on the observed and predicted MFTL habitat layers we are able to calculate both an area of impact and a percentage of impact for each alternative. This is shown in detail in Table 2. We excluded from the analysis areas where the reduction in sand delivery was less than 25 percent. The different alternatives and their predicted sand shadows are shown visually in Figures 16 through 21.

**Table 1. Direct and indirect impacts to the sand transport corridor/MFTL habitat areas under the Project alternatives. Indirect impacts are due to reduced sand transport from upwind. Direct impacts are due to project footprint in the dune areas.**

	Percentage reduction of sand input (Indirect Impact)	Acreage	Sum of Impacts
<b>Proposed Project Alternative 1</b>	25 - 50%	845	1,365
	50 - 75%	400	
	75 - 100%	120	
	Direct Impact	90	90
<b>Proposed Project Alternative 1a</b>	25 - 50%	890	1,280
	50 - 75%	300	
	75 - 100%	90	
	Direct Impact	120	120
<b>Proposed Project Alternative 2</b>	25 - 50%	980	1,193
	50 - 75%	175	
	75 - 100%	38	
	Direct Impact	90	90
<b>Proposed Project Alternative 2a</b>	25 - 50%	860	1,010
	50 - 75%	140	
	75 - 100%	10	
	Direct Impact	120	120
<b>Proposed Project Alternative 3</b>	25 - 50%	0	10
	50 - 75%	10	
	75 - 100%	0	
	Direct Impact	10	10
<b>Proposed Project Alternative 3b</b>	25 - 50%	660	855
	50 - 75%	40	
	75 - 100%	155	
	Direct Impact	80	80

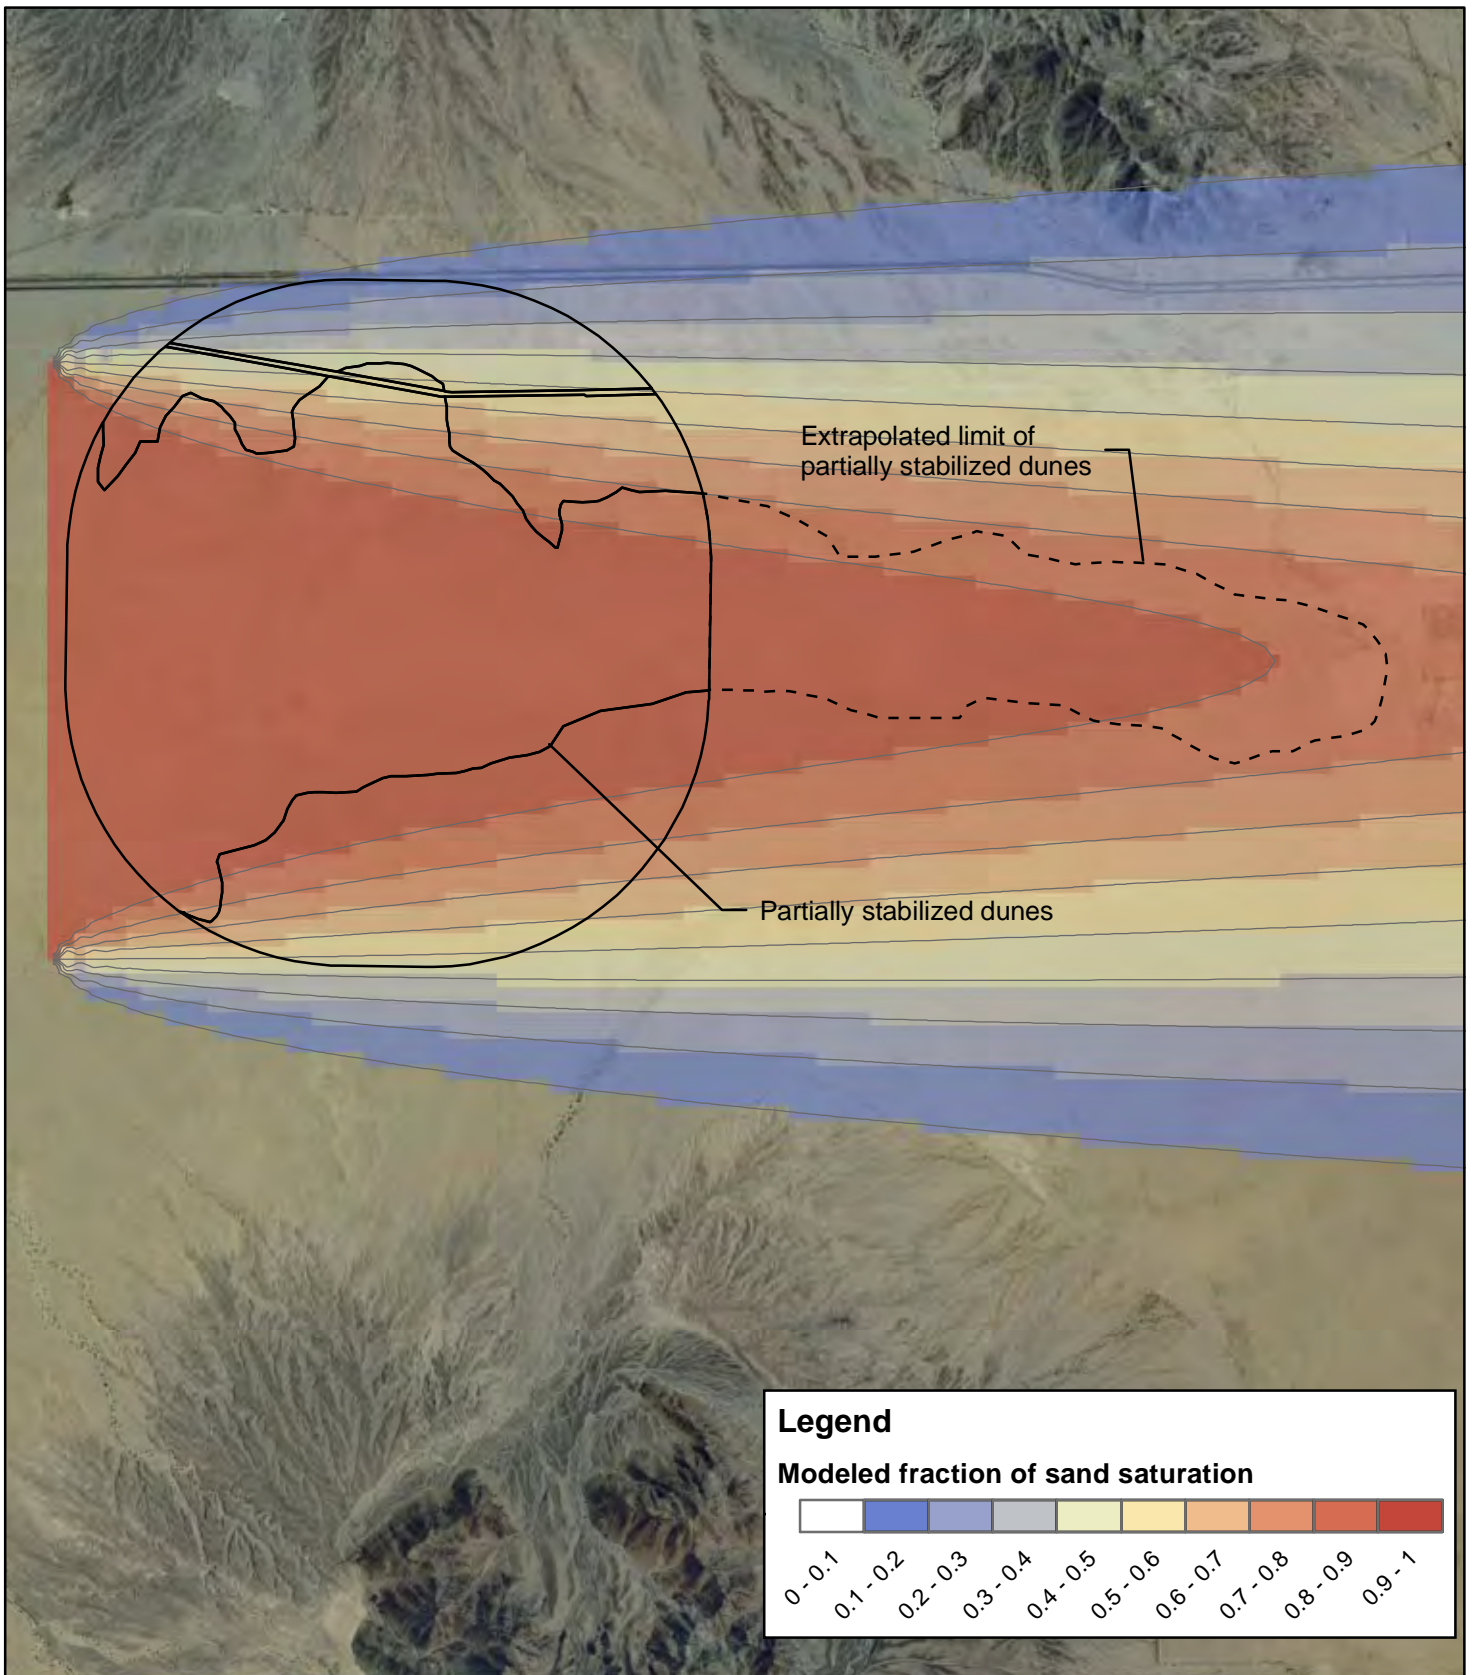

Source: ESRI, Inc.

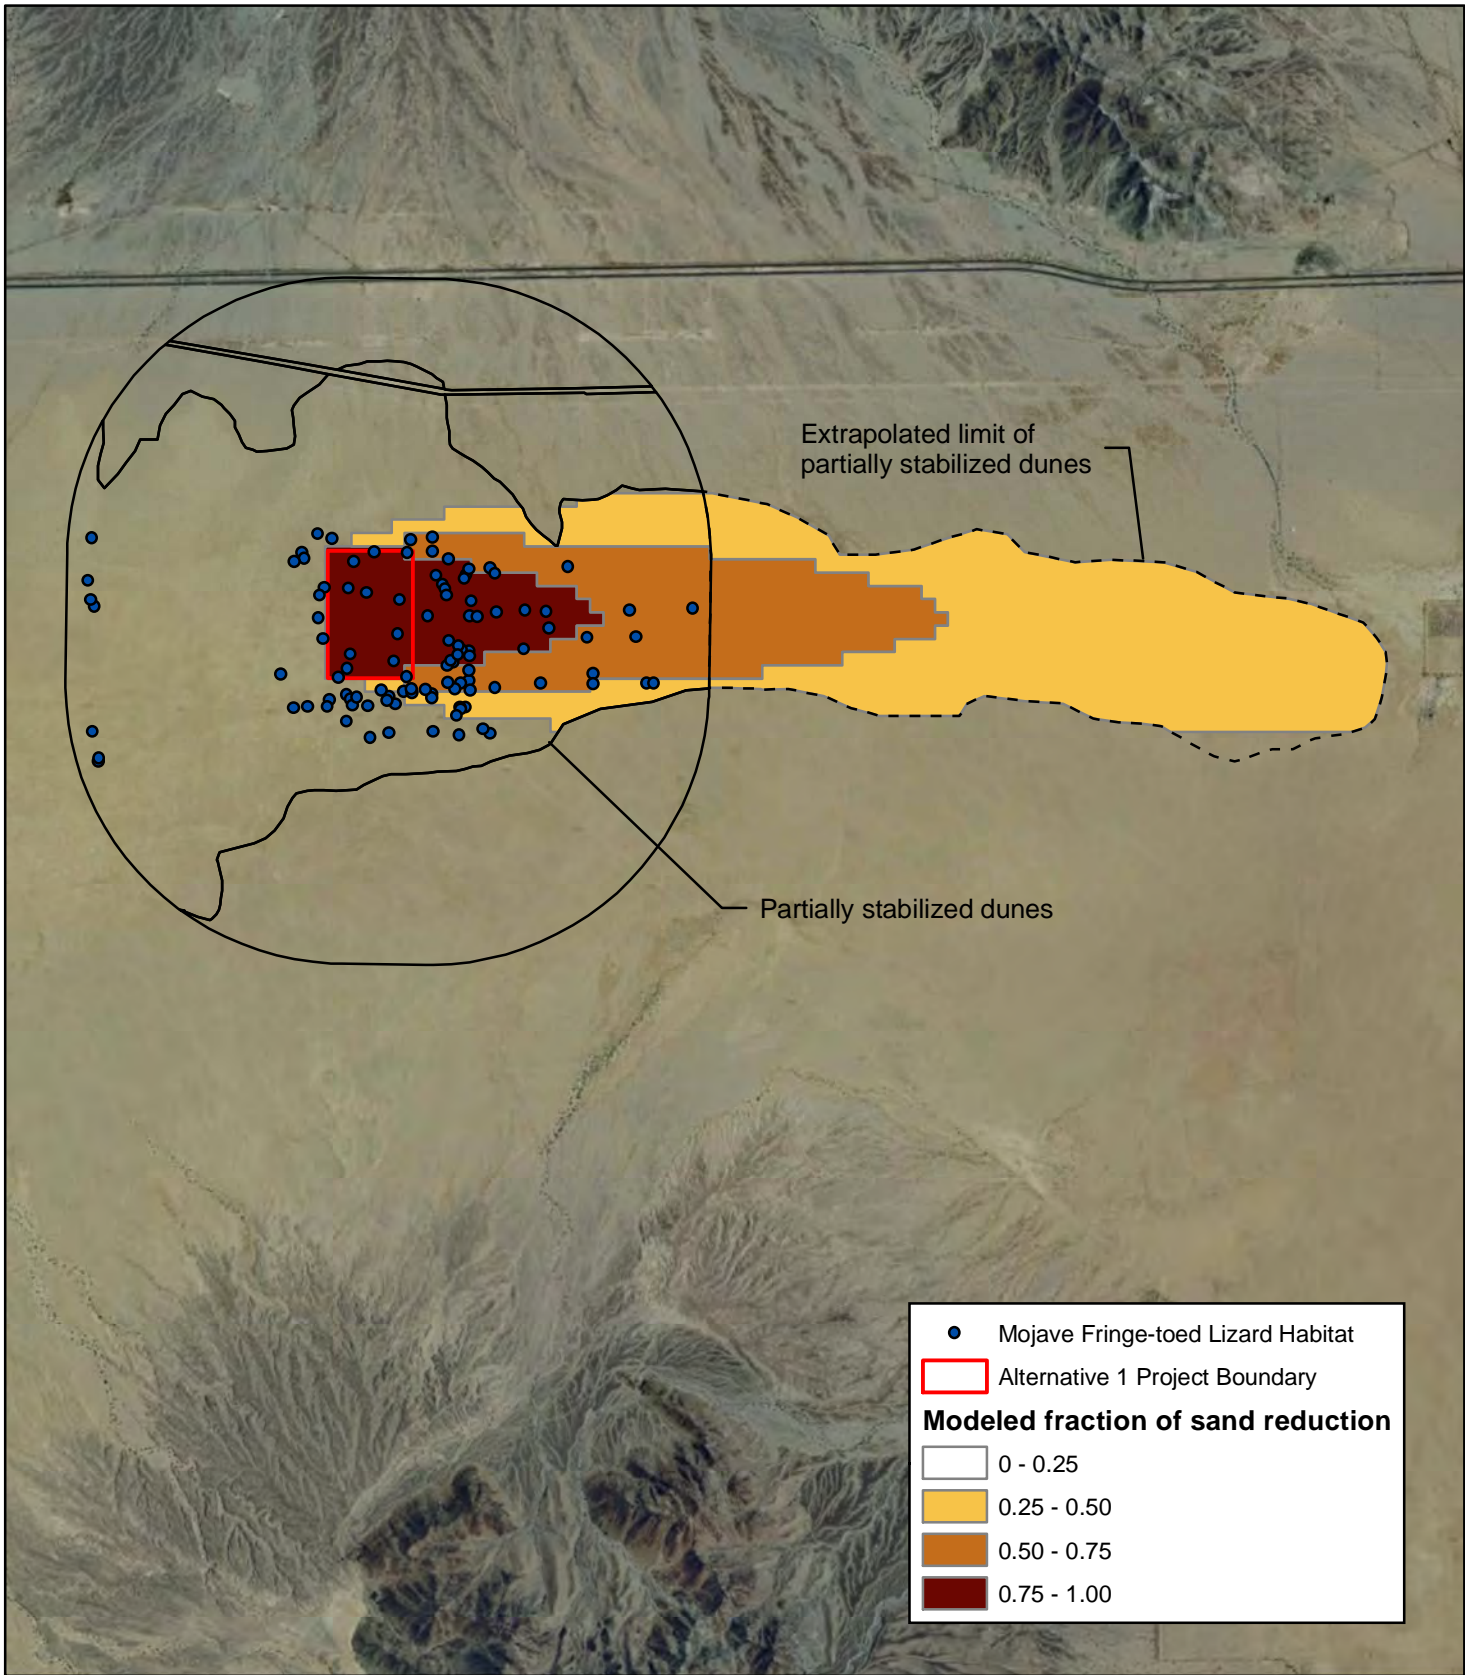


figure 15  
 CRSS Sand Transport

Modeled sand transport under existing conditions

PWA Ref# - 2039.00





Source: ESRI, Inc.


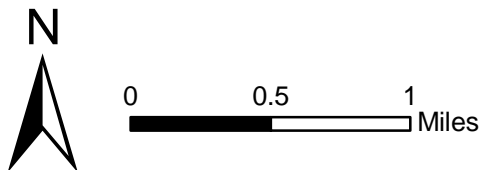


figure 16  
CRSS Sand Transport

Reduction in sand input for Alternative 1

PWA Ref# - 2039.00



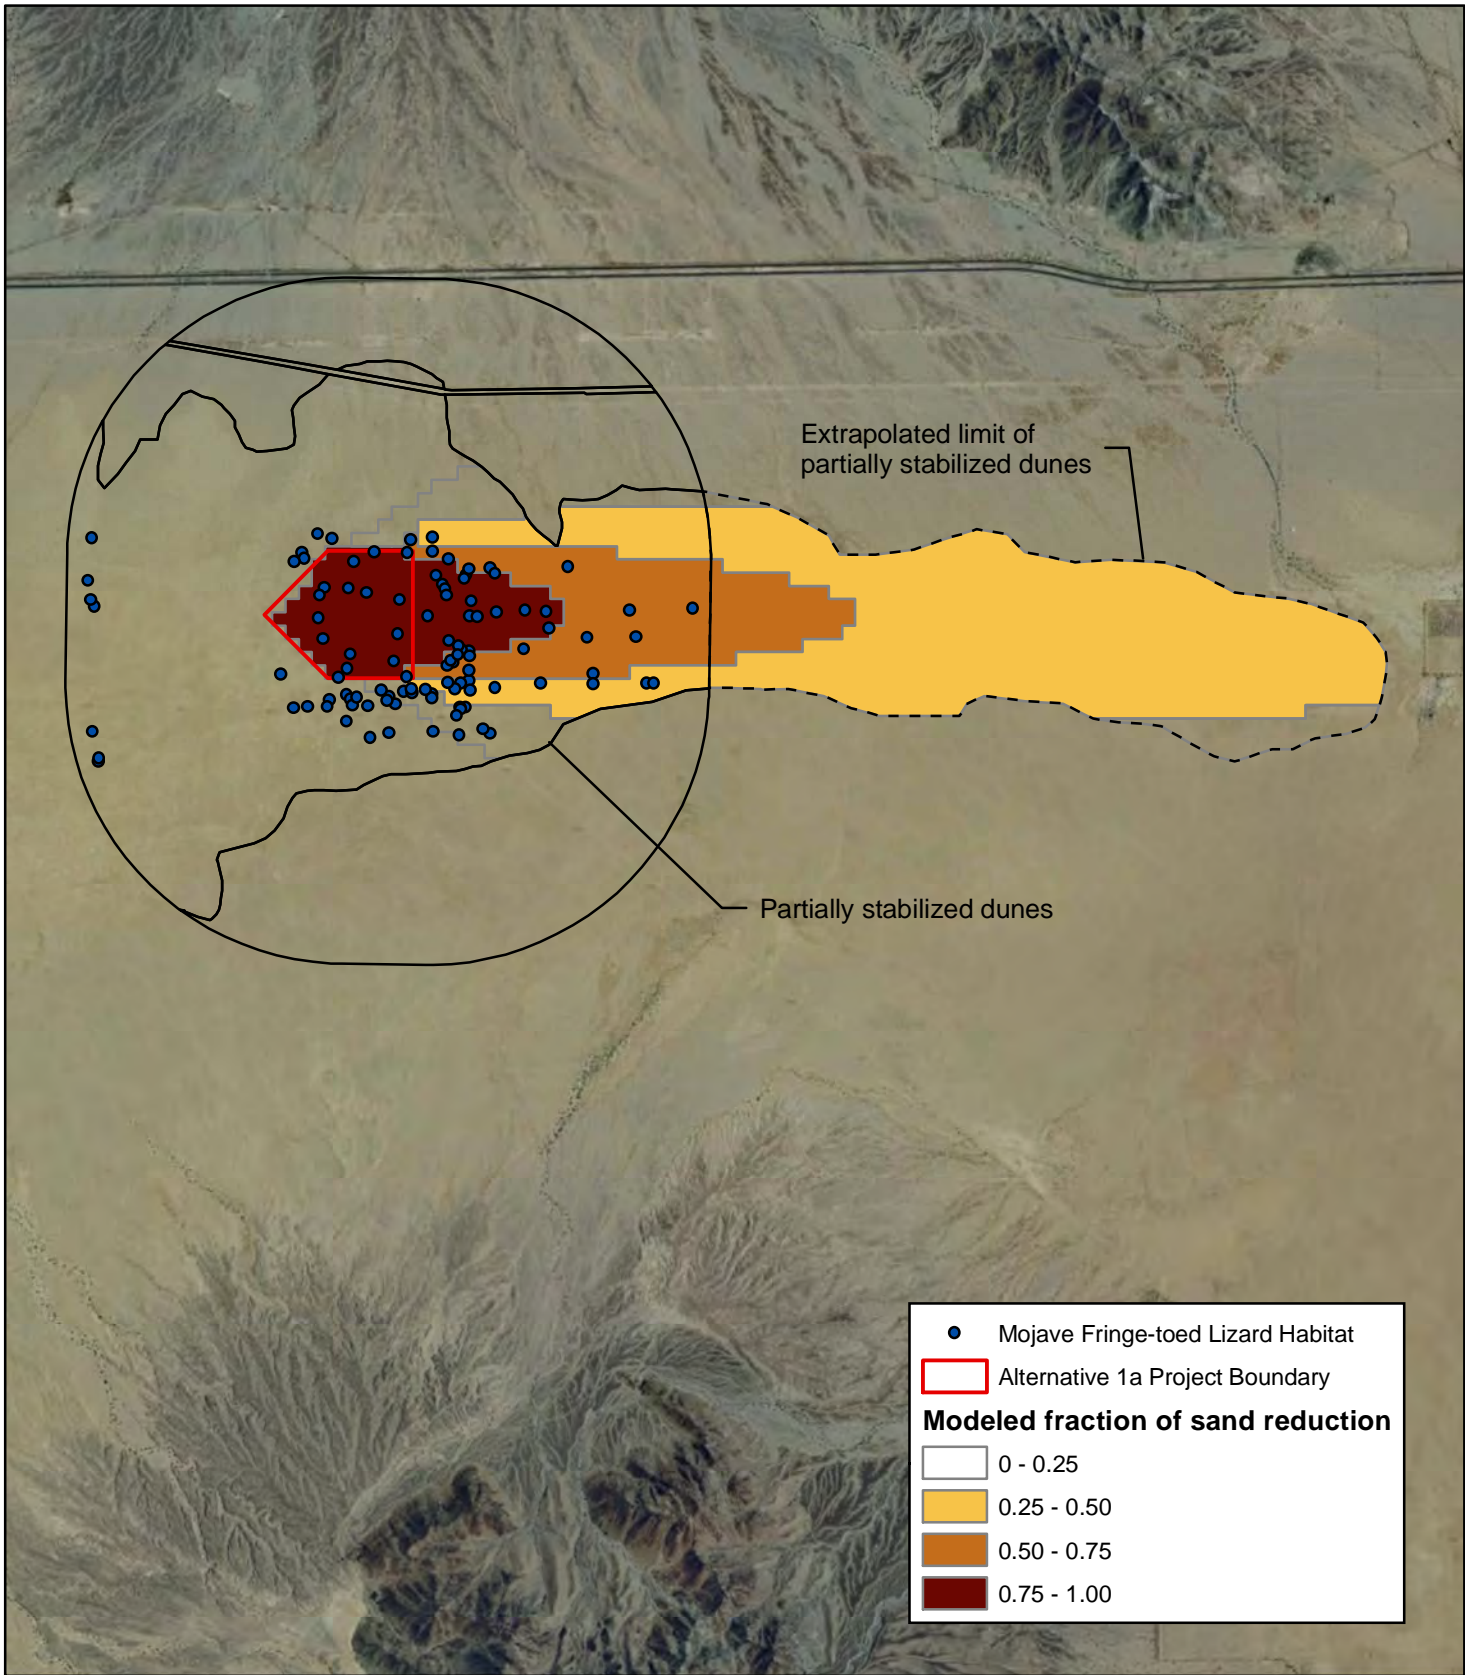

- Mojave Fringe-toed Lizard Habitat
- Alternative 1a Project Boundary
- Modeled fraction of sand reduction**
- 0 - 0.25
- 0.25 - 0.50
- 0.50 - 0.75
- 0.75 - 1.00

Source: ESRI, Inc.

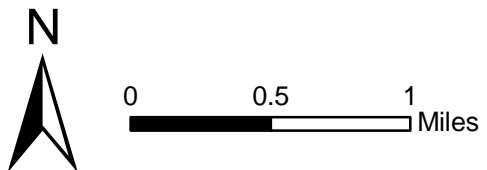



figure 17  
CRSS Sand Transport

Reduction in sand input for Alternative 1a

PWA Ref# - 2039.00





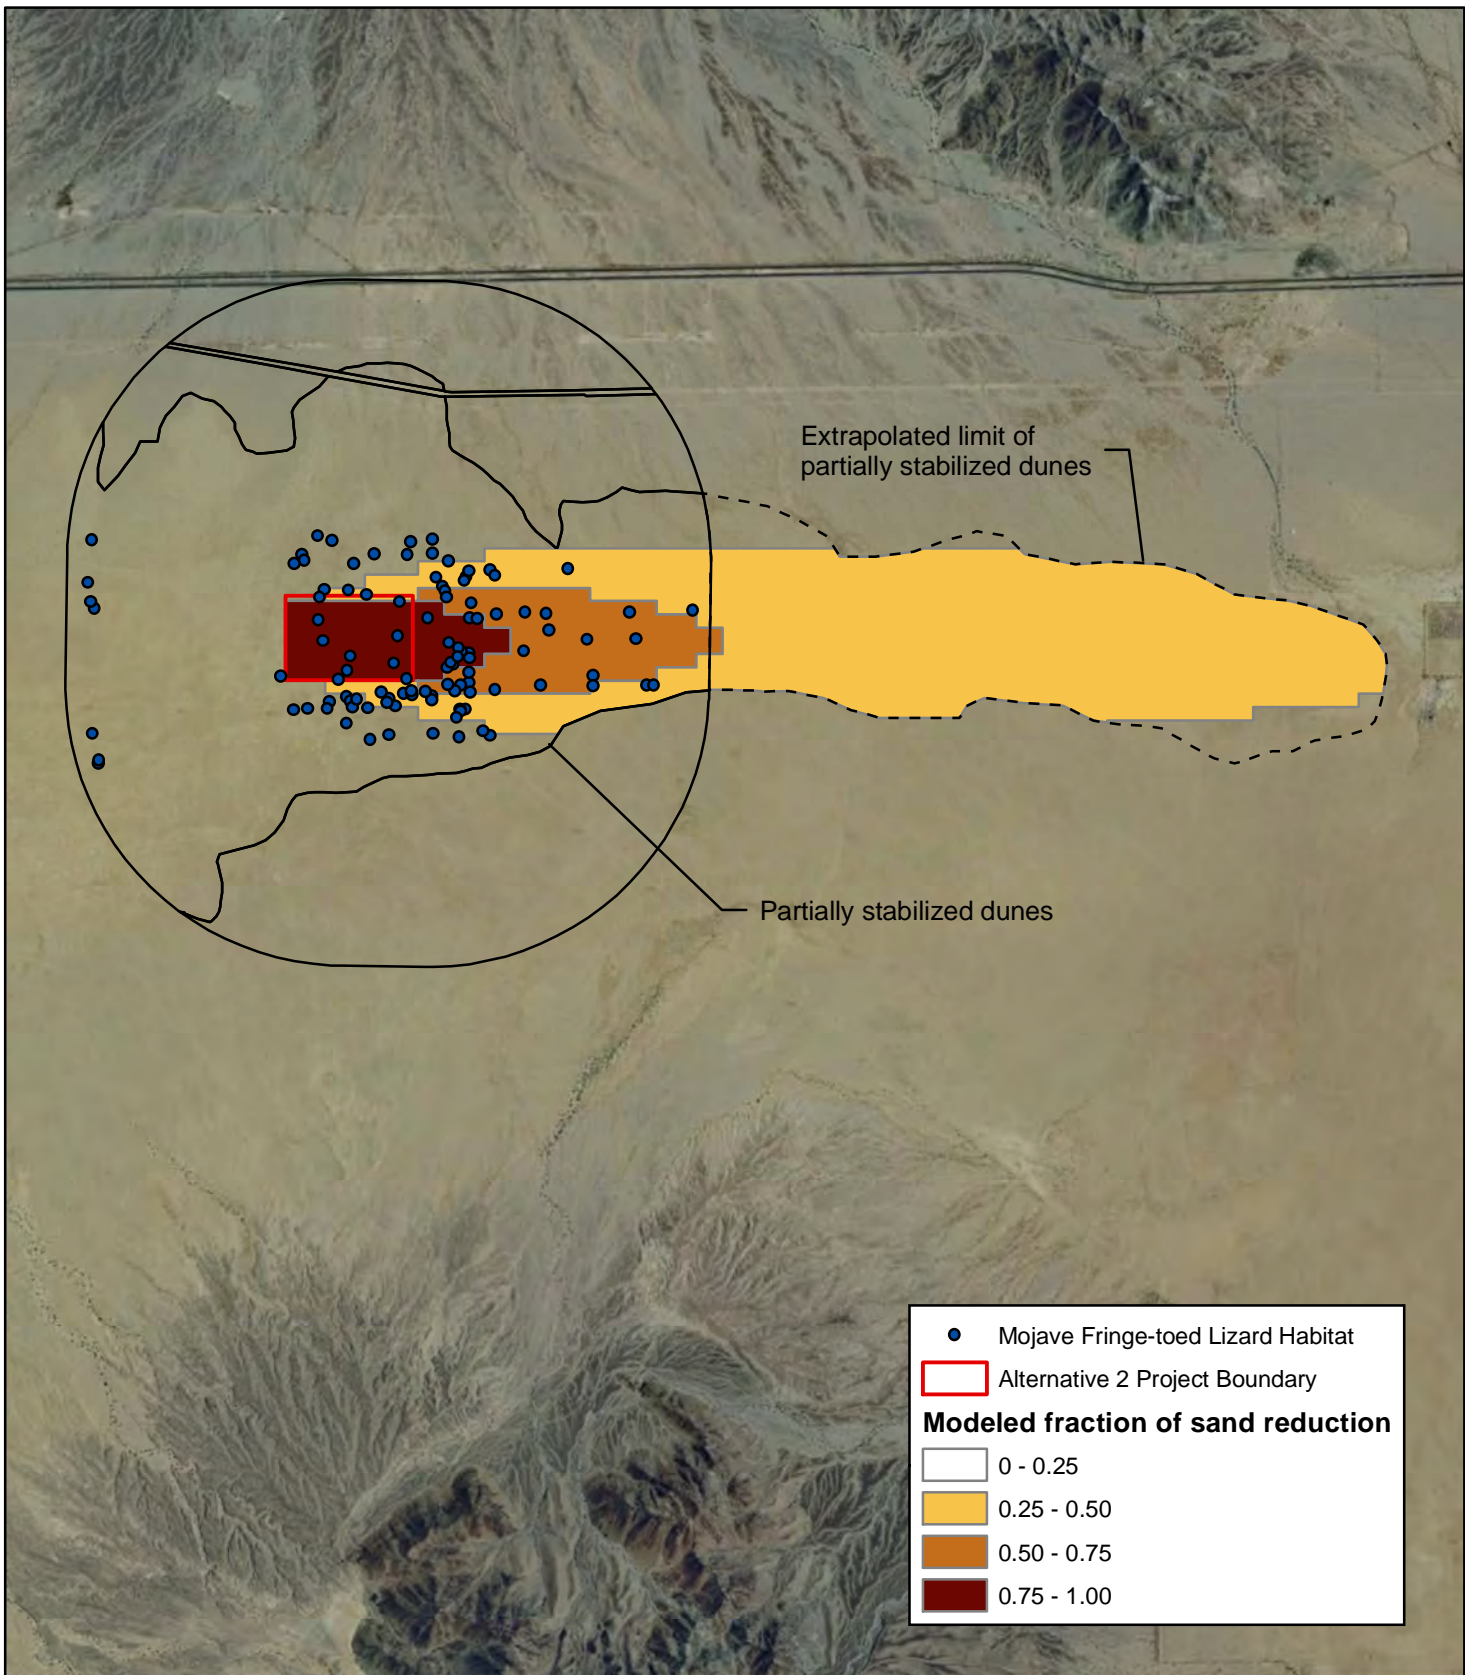

Source: ESRI, Inc.


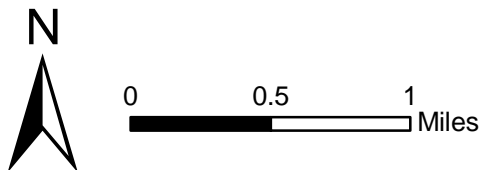


figure 18  
CRSS Sand Transport

Reduction in sand input for Alternative 2

PWA Ref# - 2039.00



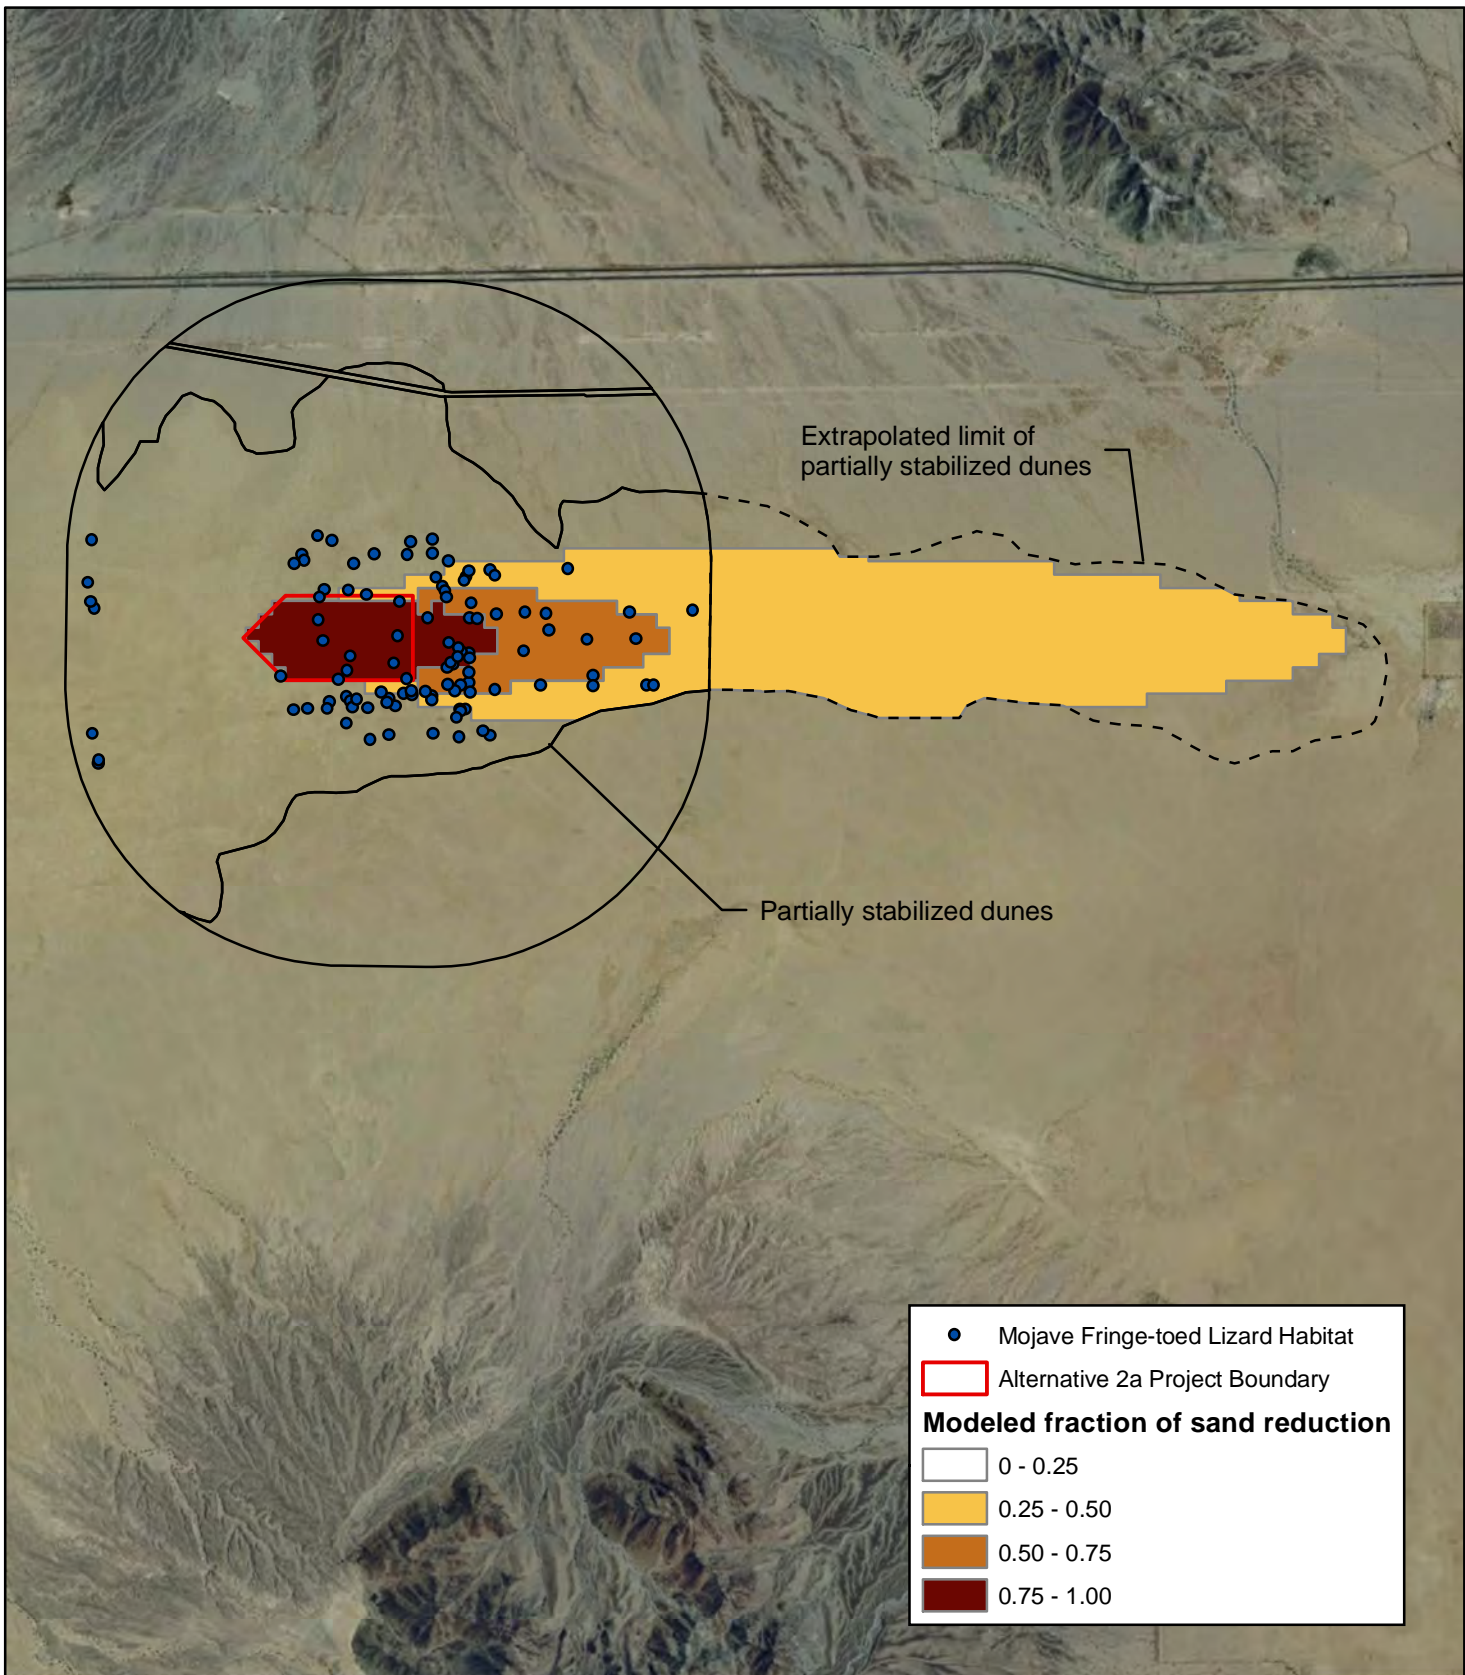

- Mojave Fringe-toed Lizard Habitat
- Alternative 2a Project Boundary
- Modeled fraction of sand reduction**
- 0 - 0.25
- 0.25 - 0.50
- 0.50 - 0.75
- 0.75 - 1.00

Source: ESRI, Inc.


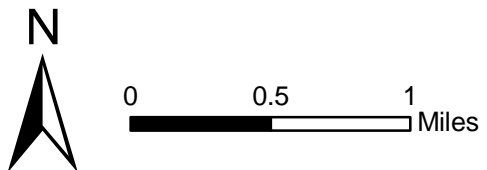


figure 19  
CRSS Sand Transport

Reduction in sand input for Alternative 2a

PWA Ref# - 2039.00



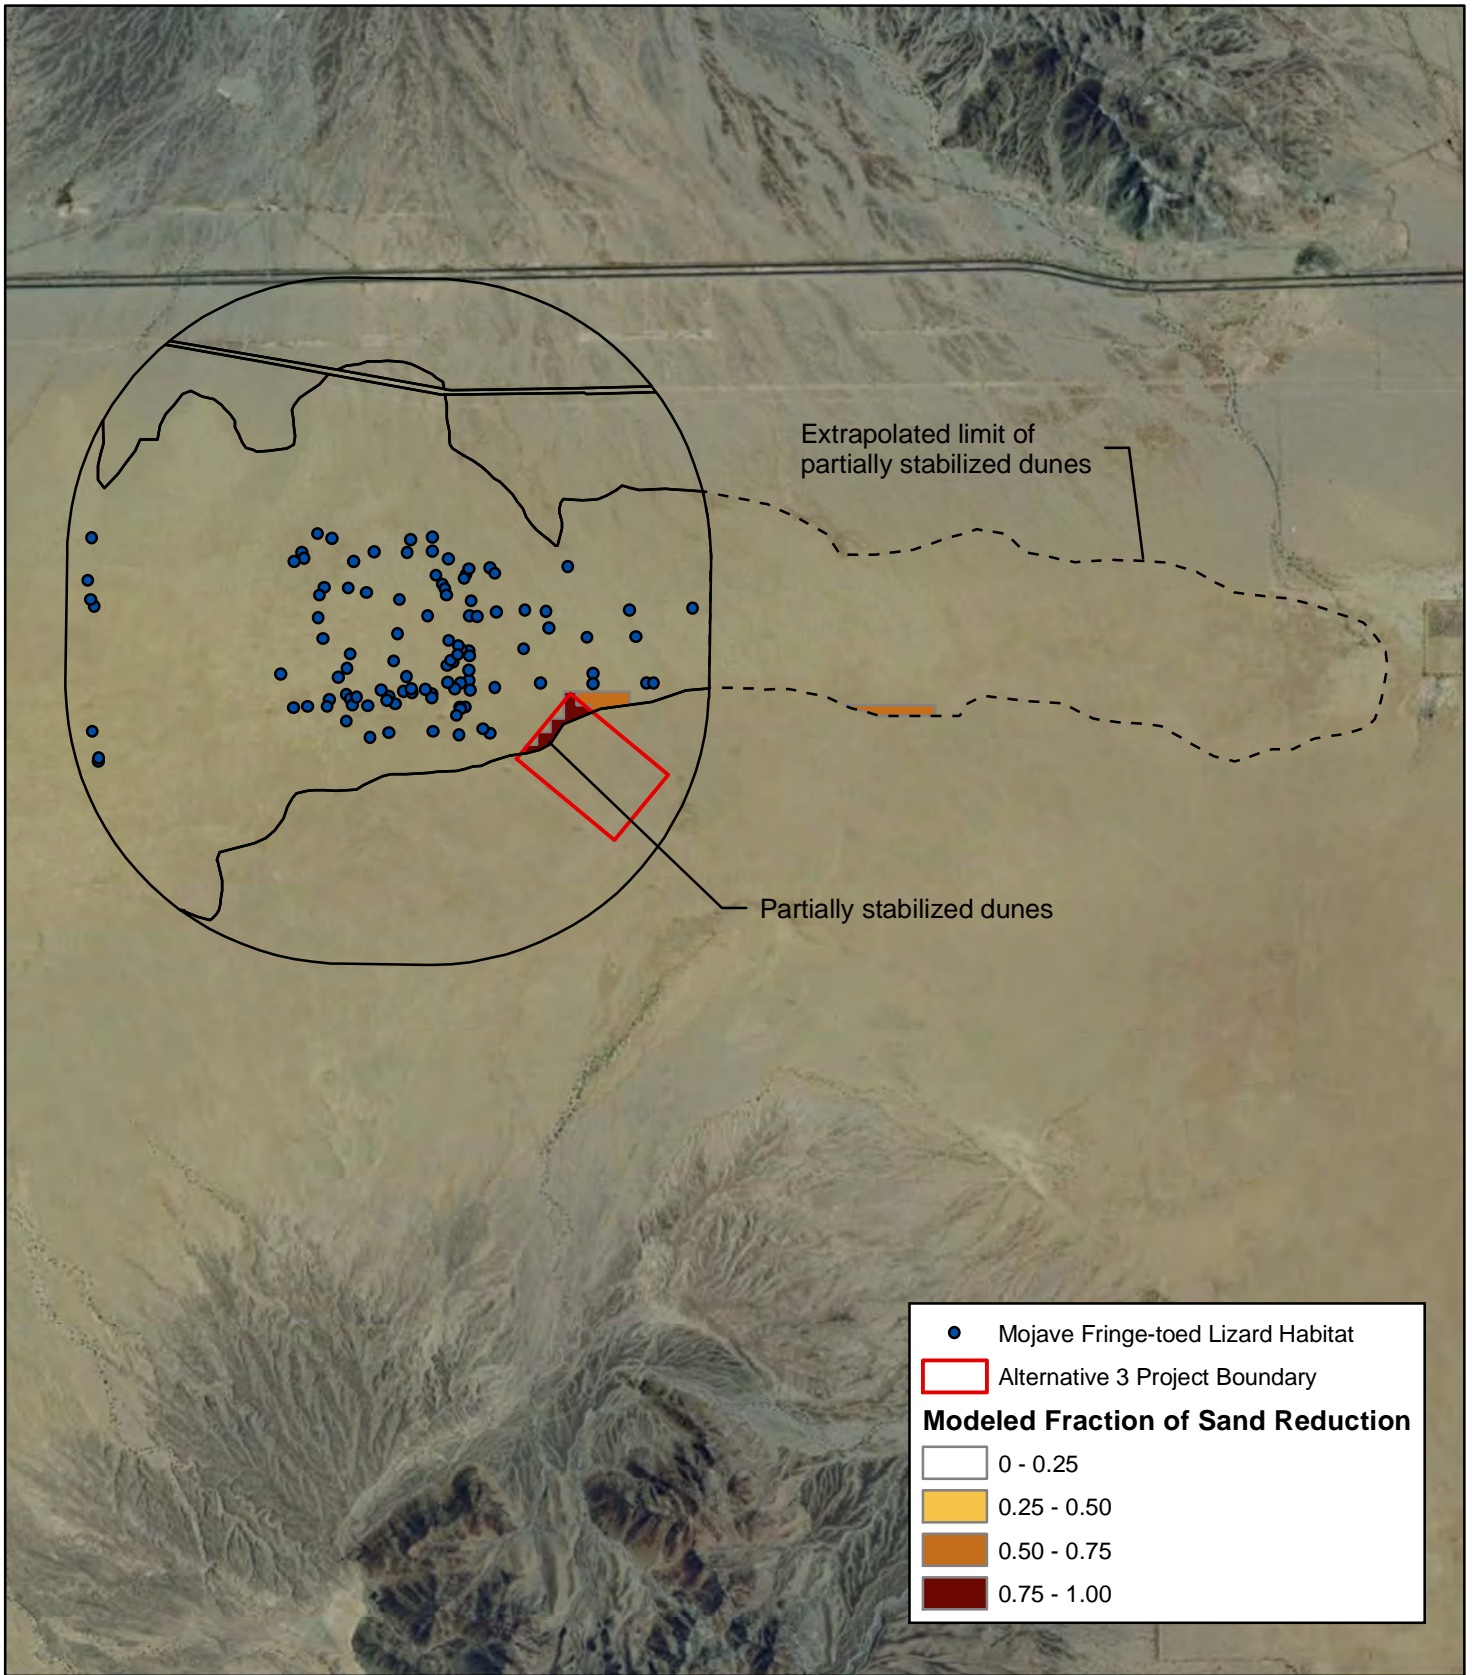


Source: ESRI, Inc.

figure 20  
CRSS Sand Transport

Reduction in sand input for Alternative 3

PWA Ref# - 2039.00



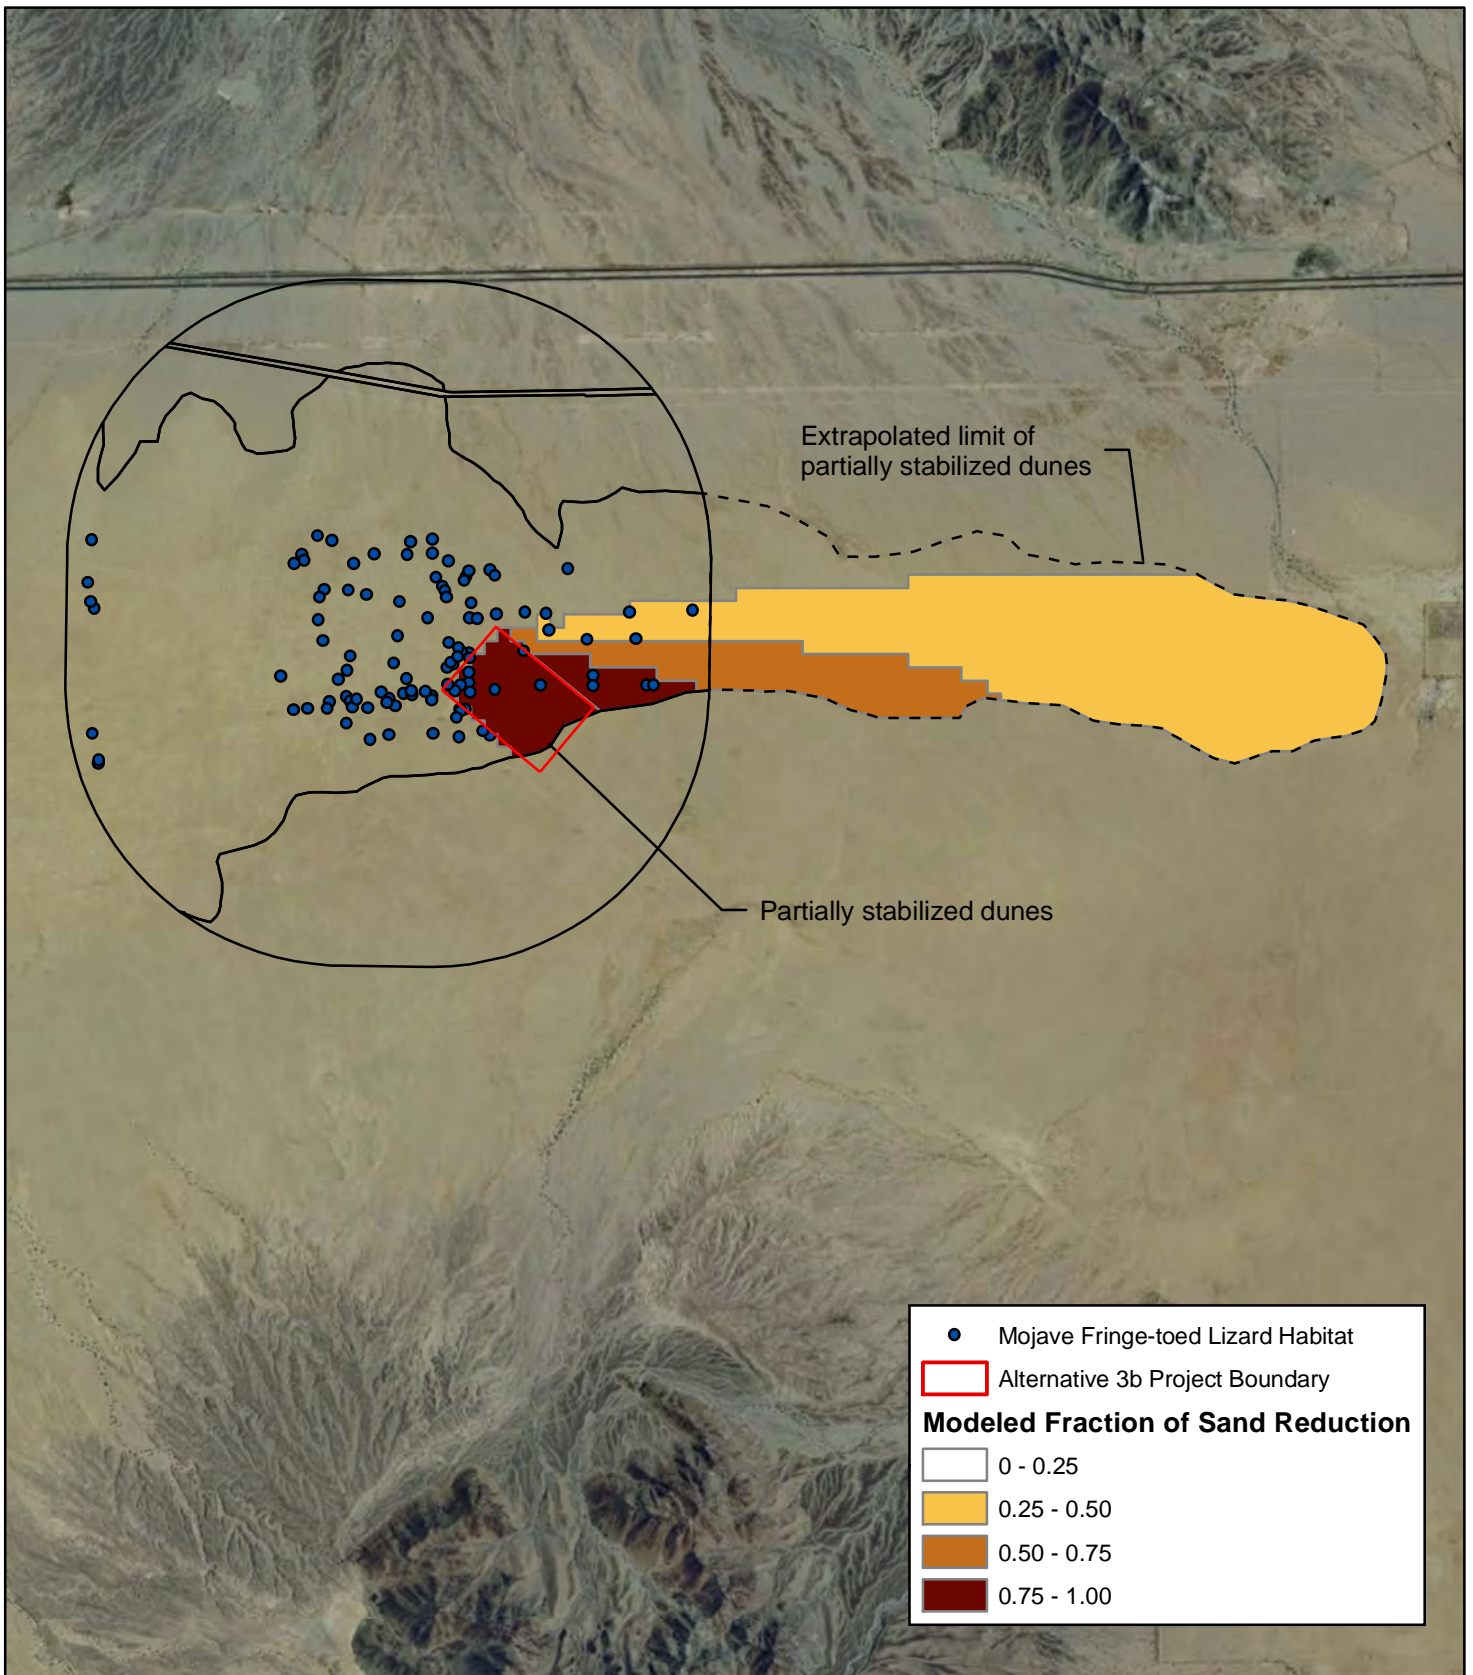

Source: ESRI, Inc.

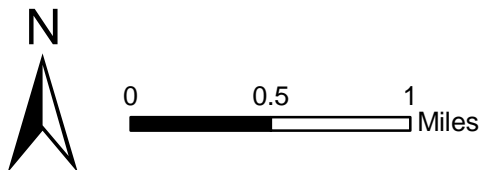


figure 21

CRSS Sand Transport

Reduction in sand input for Alternative 3b

PWA Ref# - 2039.00



## 5.4 DISCUSSION OF RESULTS

Table 1 provides a detailed break down of the direct and indirect impacts of the project alternatives. All the alternatives except for Alternative 3 have large areas of indirect impact, because they all block a large proportion (approximately half to a third) of the sand transport corridor.

### Alternative 1. (Figure 16)

This alternative has the highest indirect impact, at 1,365 acres. This is because the project presents the greatest cross section area to the most active part of the sand transport corridor, and does not reduce impact by passing sand around the site. The direct impact is 90 acres.

### Alternative 1a. (Figure 17)

In this alternative the sand fence is extended upwind and sloped at 45° to encourage sand to pass around the boundary. This increases the direct impact over Alternative 1 from 90 to 120 acres, but reduced the indirect impact from 1,365 to 1,280 acres. The benefits of this alternative are minimal and there may potentially be a net adverse effect since the direct impacts are more severe than the indirect impacts.

### Alternative 2. (Figure 18)

In this alternative the project site is rotated 90° to present the shorter side across the sand transport corridor. The direct impact is the same as for Alternative 1 (90 acres) but the indirect impact is slightly less (1,193 acres).

### Alternative 2a. (Figure 19)

This alternative is the same as Alternative 2 with the addition of the 45° wind fence extension to encourage sand to pass around the boundary. It increases the direct impact area from 90 to 120 acres but reduced the indirect impact to 1,010 acres. The reduction in indirect impact exceeds the increase in direct impacts compared with Alternative 1.

### Alternative 3. (Figure 20)

This alternative moves the project footprint south out of the main part of the sand transport corridor. The resulting direct and indirect impacts are minimal, at 10 acres for each. However, this alternative is located on land that is not believed to be available to the applicant.

### Alternative 3a. (Figure 21)

This alternative realigns the project to the edge of the most active part of the sand transport corridor and reorients it to be at 45° to the prevailing wind. The direct impacts are 80 acres, while the indirect impacts are 855 acres. While significant, this is the lowest impact of the alternatives located on land available to the applicant.

## 6. REFERENCES

Bagnold, R.A. 1941. The Physics of Blown Sand.

Griffiths, P.G., Webb, R.H. and Lancaster, N. 2002. Eolian sand supply to Coachella Valley fringe-toed lizard habitat in the northern Coachella Valley, California. Abstracts of the Geological Society of America Volume 34, no. 6, page 75, October 2002.

Kenney, M. 2010. Preliminary Geomorphic Aeolian Report: Colorado River Substation, Riverside County, CA

Muhs, D.R., Reynolds, R.L., Been, J. and Skipp, G. Eolian sand transport pathways in the southwestern United States: importance of the Colorado River and local sources. Quaternary International Volume 104, pages 3-18, 2003.

Turner, F.B., Weaver, D.C. and Rorabaugh, J.C. 1984. Effects of reduction in windblown sand on the abundance of the Fringe-toed Lizard (*Uma inornata*) in the Coachella Valley, California. Copeia, 1984(2), pp. 370-378.

## **7. LIST OF PREPARERS**

This report was prepared by the following ESA PWA staff:


Andrew Collison, Ph.D.

Christian Nilsen, M.S., P.E.

James Gregory, M.S.

**8. APPENDIX A – EXCERPTS FROM KENNEY, M. 2010. PRELIMINARY  
GEOMORPHIC AEOLIAN REPORT: COLORADO RIVER SUBSTATION, RIVERSIDE  
COUNTY, CA**




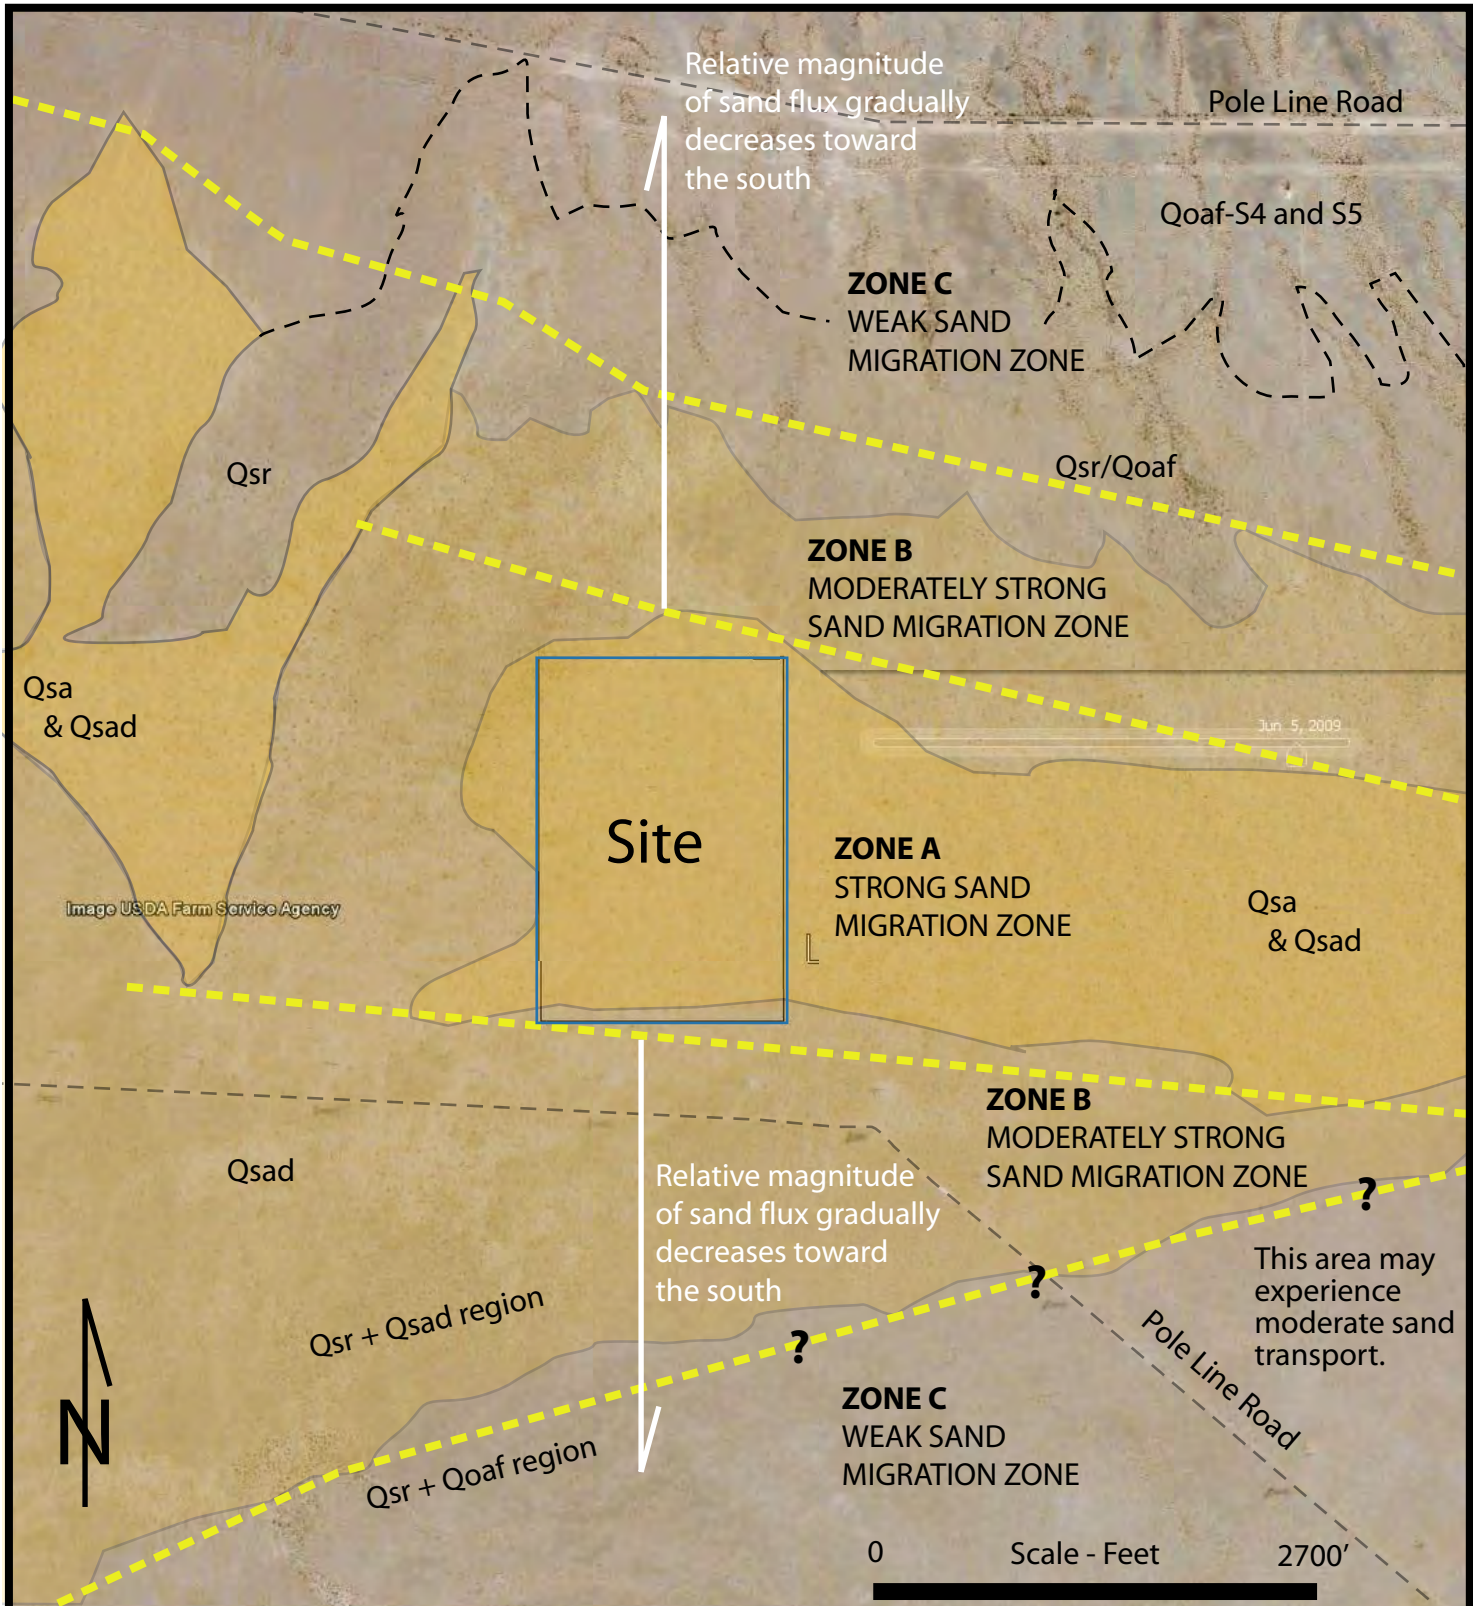

Southern California Edison Corporate  
Environmental Health & Safety Colorado River Substation

Mapping by Miles D. Kenney, PhD, PG


Preliminary Sand Migration  
Zones Map



MK

10/2010

Plate 5

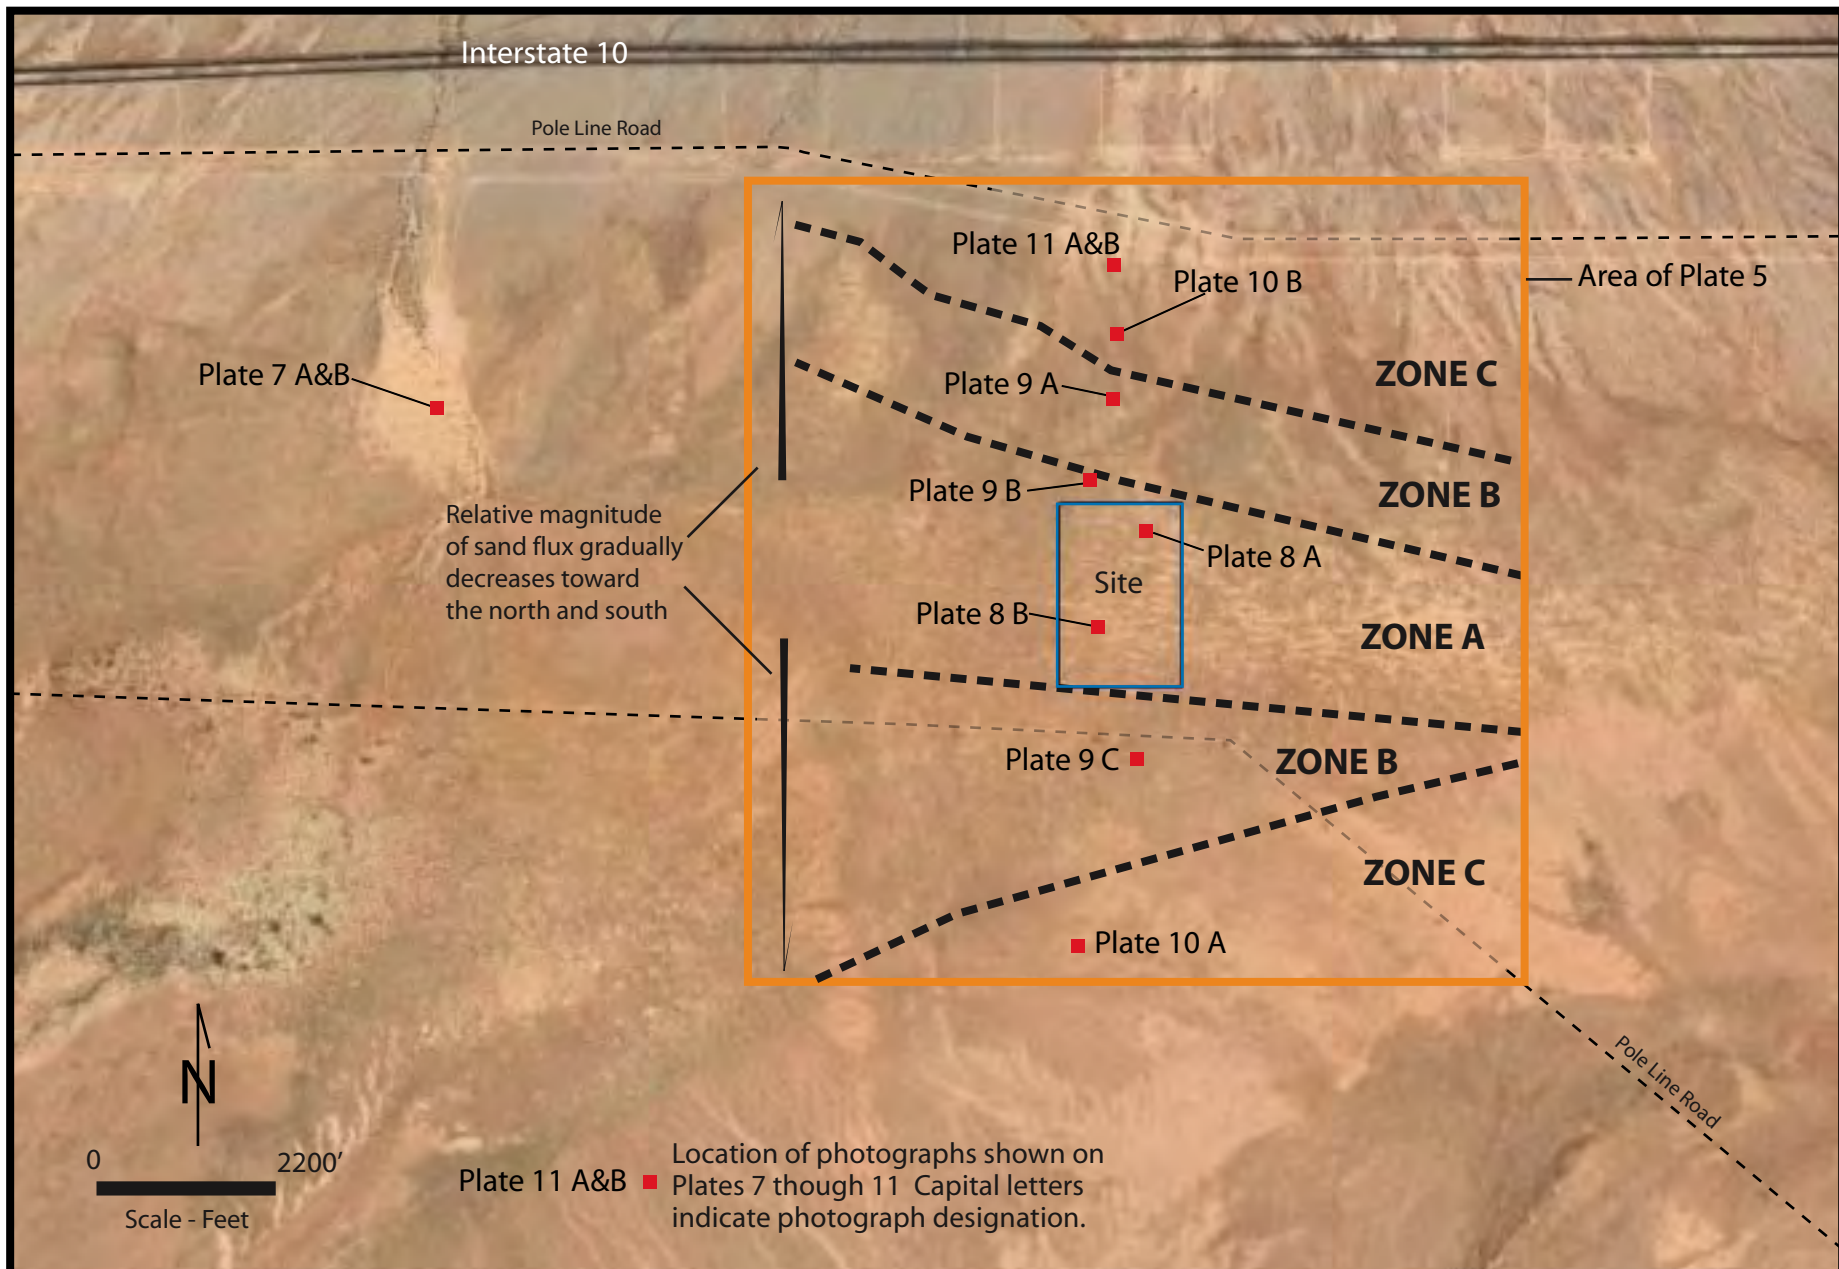


Southern California Edison Corporate Environmental Health & Safety  
 Colorado River Substation

TH

10/2010

PHOTOGRAPH LOCATION MAP




JN 717-10

Plate 6

# Unit Qsa


PHOTO A: View toward the south

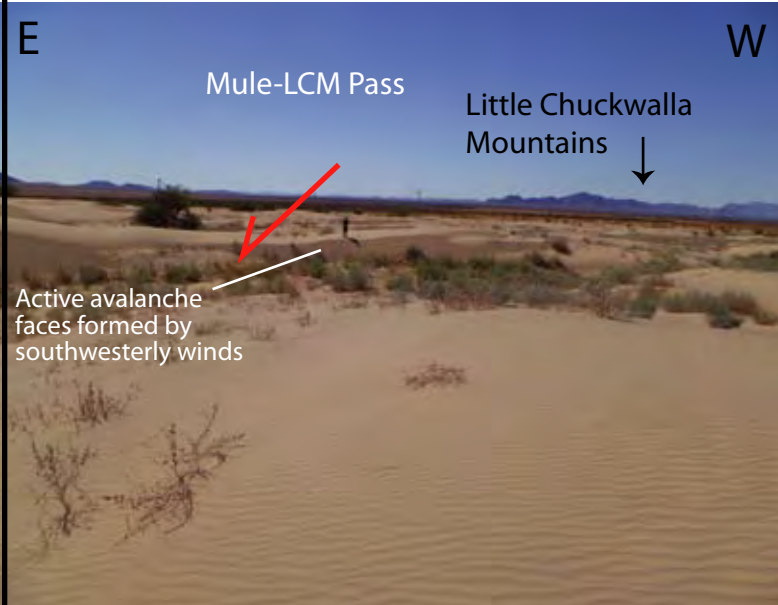

33 35.905  
114 50.685

This photo is within the active dune complex located approximately 1.5 miles west of the site. These dunes range from 4 to over 15 feet tall and exhibit active avalanche faces and abundant loose sand cover. The dunes are complex linear-transverse due to variations in seasonal winds. Avalanche faces trending ~EW forming due to southerly winds were active at the time of our field work (October - red arrow), but avalanche faces trending ~NS associated with westerly winds were clearly active during the Winter months (earlier in the year).

PHOTO B: View toward the west

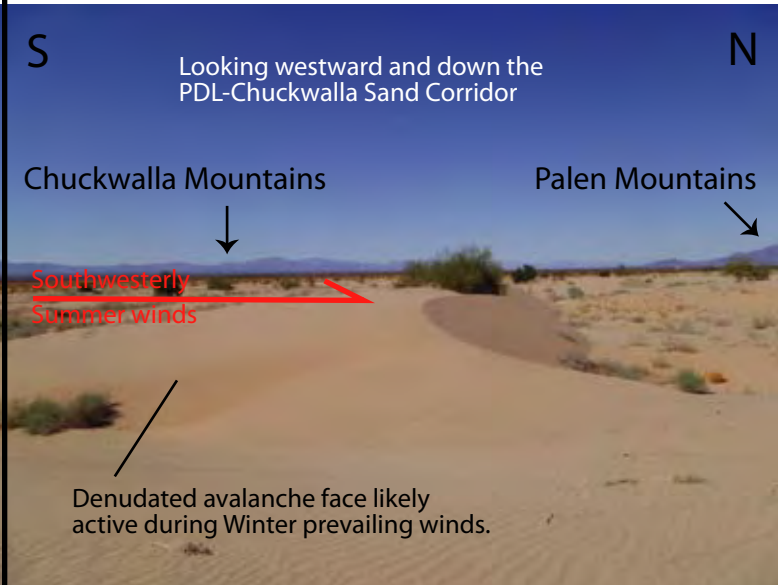

33 35.905  
114 50.685

This photo shows an active dune and associated avalanche face formed by southwesterly winds emanating from the Mule-LCM wind corridor in October, 2010. Avalanche faces associated with Winter prevailing winds down the Chuckwalla Valley were subdued and not active in October, but clearly present. A minor such seasonally denudated avalanche face is shown.

Southern California Edison Corporate Environmental Health & Safety  
Colorado River Substation

JN 717-10

PHOTOGRAPHS

TH


10/2010



Kenney GeoScience


Plate 7

# Typical Sand Migration Zone A within the Project exhibitin relatively strong aeolian sand migration

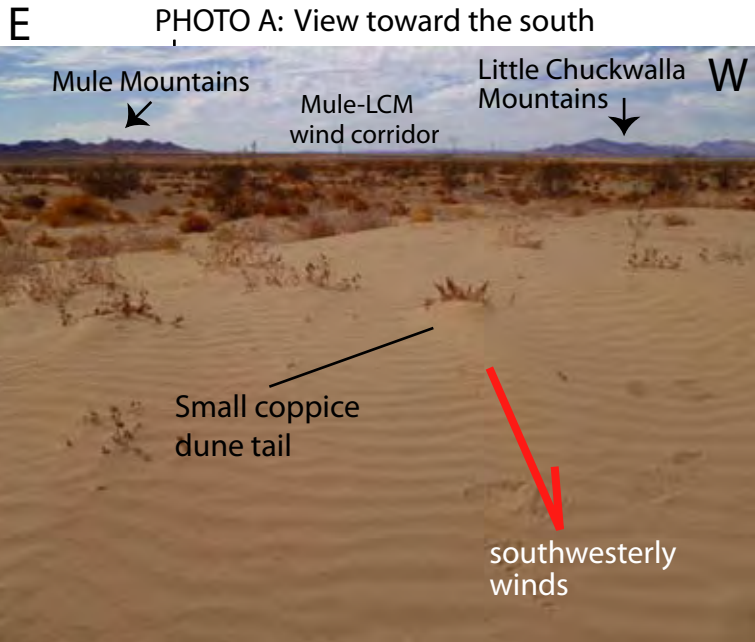

33 35.657  
114 49.015

This photograph shows typical aeolian conditions in Zone A within the site. Notice the abundant loose sand and low lying linear-transverse dunes. Photo also shows a small coppice dune tail associated with southwesterly winds from the Mule-LCM wind corridor.

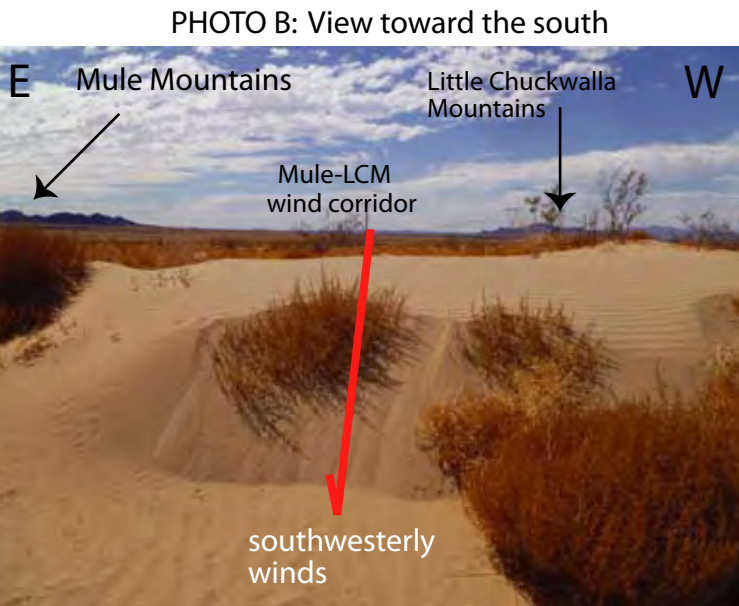

33 35.462  
115 49.135

Similar conditions as described for Photograph A above.

Southern California Edison Corporate Environmental Health & Safety  
Colorado River Substation

JN 717-10

PHOTOGRAPHS

TH

10/2010



Kenney GeoScience

Plate 8

# Typical Sand Migration Zone B exhibiting relatively moderate sand migration rates

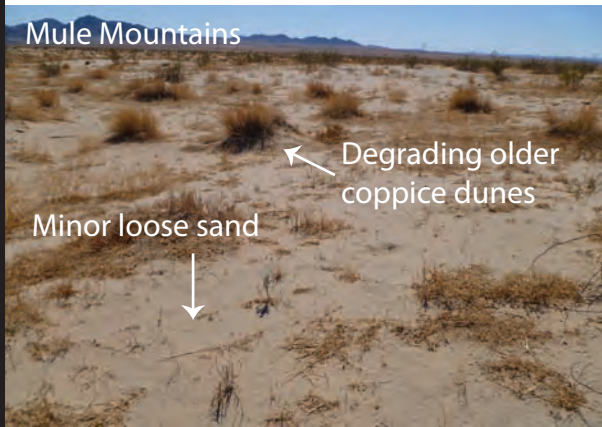


PHOTO A: View toward the south

33 35.923  
114 49.097


Photograph shows active loose sand sheet (ripples) across the surface, moderate vegetation cover, denudated topography (lack of larger dunes), interdune basins (lack of drainage system), and older eroded dune mounds and ancient cores to linear-transverse complex dunes. Zone B is also characterized by some degrading coppice dunes (eroding by wind).



PHOTO B

33 35.757  
114 49.152

This photograph shows a gravel lag surface within Zone B that experiences active sand transport. Notice the active loose sand depositing as small coppice dunes.

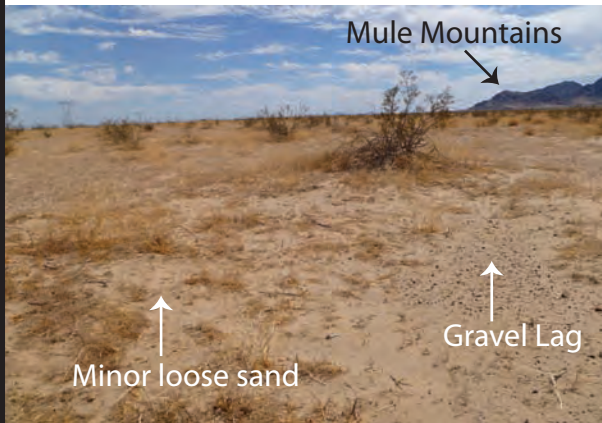

## Transition area between Zones B and C

PHOTO C: View toward the east

33 35.206  
114 49.037

Photograph shows relationship of areas exhibiting thin active sand sheets and gravel lag surfaces. Notice the older inactive degrading-vegetated coppice dune that indicates that this area likely experienced stronger sand migration rates in the latest Pleistocene to mid-Holocene.

Southern California Edison Corporate Environmental Health & Safety  
Colorado River Substation

JN 717-10

PHOTOGRAPHS

TH

10/2010




Kenney GeoScience

Plate 9

# Typical Sand Migration Zone C exhibiting relatively weak aeolian sand migration


PHOTO A: View toward the south

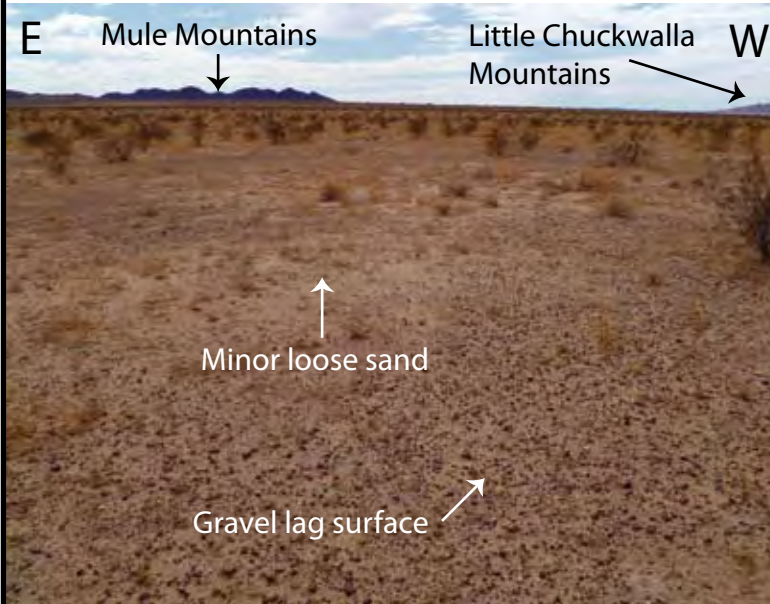

33 34.811  
114 49.189

Photograph shows typical Zone C geomorphology exhibiting areas dominated by gravel lag surfaces, very minor and thin loose aeolian sand, and a paucity of coppice dunes either active or degrading.

PHOTO B: View toward the west

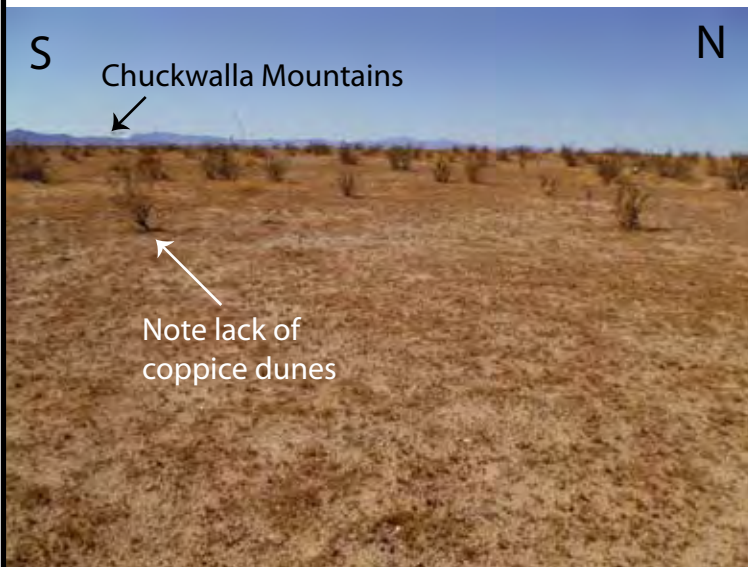

33 36.059  
114 49.089

This is an area of Zone C that exhibits ancient sand sheet deposits (Qsr) in the near surface but lacks active aeolian sand deposits. Notice paucity of coppice dune deposits. This area exhibits geomorphology suggesting weak to very weak active sand transport but likely experienced more active sand transport in the latest to mid-Holocene.

Southern California Edison Corporate Environmental Health & Safety  
Colorado River Substation

JN 717-10

PHOTOGRAPHS

TH 10/2010




Plate 10

# Unit Qoaf - Latest Pleistocene Older Alluvial Fan Deposits


PHOTO A: View toward the south



33 36.177  
114 49.091

This photograph shows a typical Quaternary Older Alluvial Fan surface exhibiting a weak to moderate desert pavement and varnish. This surface is an accumulation zone of ancient sand sheets (Qsr) that is bioturbated and overlying a buried and eroded latest Pleistocene soil developed in alluvial fan parent sediments. This area is within Zone C and exhibits geomorphology indicating a very weak aeolian sand migration rate.

PHOTO B: Test pit

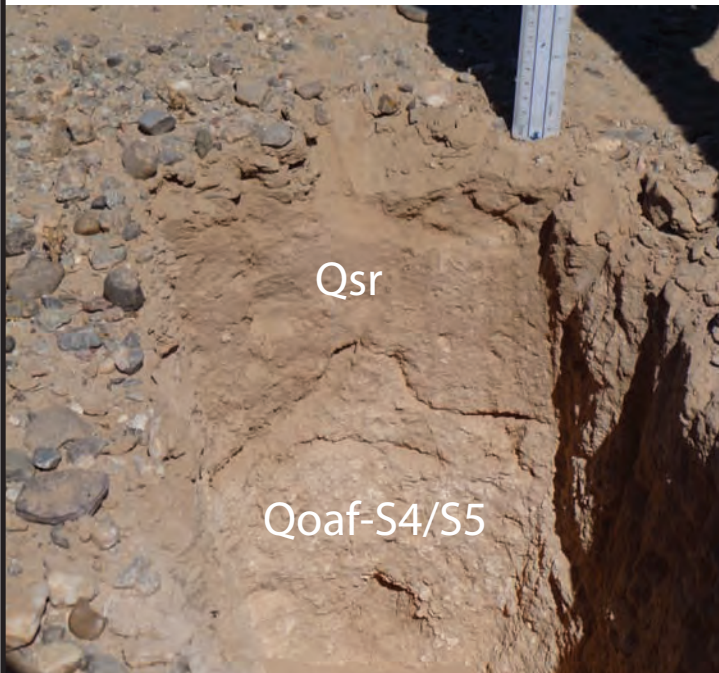

33 36.177  
115 49.091

Photograph of a shallow soil pit in the Qoaf surface. The pit shows a gravel cap above ancient sand sheet (ripple) deposits (Qsr). Unit Qsr has penetrative carbonate, is moderately dense from carbonate and fines secondary accumulation and is bioturbated. Qsr overlies Qoaf deposits exhibiting abundant carbonate blebs 1/4" in diameter and penetrative carbonate. This soil is latest Pleistocene in age. Unit Qoaf likely underlies most of the dunes within the site area.

Southern California Edison Corporate Environmental Health & Safety  
Colorado River Substation

JN 717-10

PHOTOGRAPHS

TH 10/2010



Kenney GeoScience

Plate 11

# memorandum

date 1/5/11  
to Scott White  
from Andrew Collison  
subject Supplemental analysis to assess sand transport rates and potential for mitigation

ESA PWA was asked to reevaluate project impacts and to assess the potential for a sand mitigation program at the proposed Colorado River Substation. The hypothetical program would involve collecting sand at the upwind side of the project, trucking it around the project site, and depositing it downwind so that it could be re-transported to downwind dune habitat. This memo focuses on the following questions:

1. What rate of sand delivery would likely be encountered, and what volume of sand would likely have to be trucked around the project site?
2. How far downwind of the project site would the sand have to be trucked before it could be released into the wind stream, and thus what is the area in the lee of the project that would be impacted?
3. What elements would go into a potential mitigation program?

Note that our approach to these questions focused solely on the physical processes and did not account for biological issues. We are commenting on the practicality of a mitigation scheme from a purely mechanical sand transport perspective.

## **1. At what rate would sand accumulate on the project boundary and require removal?**

There are no published data on sand transport rates in the project vicinity, and initial analyses of impact (PWA, 2010) used relative concentrations of sand (i.e. applied a uniform distribution of sand across the western sand corridor boundary and measured percent reduction in sand rather than actual flux of sand.) For this supplementary report we conducted a literature review to determine a range of potential sand delivery rates. We have used the site classification developed by Kenney (2010) to break the site into Zones A-C, where Zone A has the most active sand transport and Zone C the least.

Kocurek and Lancaster (1999) estimated a mean sediment flux of  $7.86 \text{ m}^3 \text{ m}^{-1} \text{ yr}^{-1}$  for Kelso dunes (located 100 miles northwest of the project site) based on wind velocity data. Like the project site, Kelso dunes is located in one of the major sand transport corridors identified by Muhs et al. (2003). However, the rate estimated at Kelso dunes is likely much higher than the rate found at the project site since Kelso dunes are almost completely unvegetated and are much larger and more active than those found at the project site.



William and Lee (1995) analyzed sand transport rates measured by Sharp (1964, 1980) for several months in the Whitewater Floodplain Preserve near Desert Hotsprings (approximately 100 miles west of the project site). This site appears to be in a relict sand transport corridor that is less well defined than the Chuckwalla corridor where the project site is located. Sharp recorded values between 0.03 and 0.2 m<sup>3</sup> m<sup>-1</sup> yr<sup>-1</sup> (converted by the authors of this paper from William and Lee’s data using an assumed unit weight of 1,500 kg per m<sup>3</sup>). Review of aerial and ground based photos suggests that this area is a much less active zone of sand transport than the project site with a higher vegetation cover, and thus represents a lower bound estimate for transport rates.

We assume that the sediment transport rate at the CRS site is between the two extremes reported above. We made an estimate of the likely level of sediment transport at the site using the following method and assumptions:

1. We assume that the value for Kelso dunes represents the maximum sediment transport rate for a completely unvegetated sand transport corridor with unlimited supply
2. We used the relationship between vegetation cover and relative rate of sediment transport developed by Lancaster and Baas (1998) for Owens Lake to estimate the relative rate of sediment transport at the project site compared with the upper and lower bound examples (see Figure 1)
3. Visually comparing the different sites (see Figures 1 and 2) suggests that if Kelso dunes has a sediment transport rate unconstrained by vegetation cover (100% of maximum potential rate), Zone A of the project area has a vegetation cover equivalent to Plates B and C of Lancaster and Baas suggesting a sediment rate approximately 10-46% that of the unconstrained rate, while Zone B of the project site resembles Plates C-D of Lancaster and Baas suggesting a rate 4-10% of the maximum rate. The Whitewater Floodplain Preserve site appears more densely vegetated than Plate D, suggesting that transport rates here are less than 4% of those at an unconstrained site such as Kelso dunes.
4. The highest sediment transport rate measured at Whitewater Floodplain Preserve is 3% of the rate at Kelso dunes, providing support for this approximation.

Based on the above assumptions we estimate that Zone A has a sediment transport rate of between 10 and 46% of the Kelso dunes rate (0.8-3.6 m<sup>3</sup> m<sup>-1</sup> yr<sup>-1</sup>), and that Zone B has 4-10% of the Kelso dune rate (0.3-0.8 m<sup>3</sup> m<sup>-1</sup> yr<sup>-1</sup>). For this analysis we took three values to represent the range of likely conditions at the project site:

<b>Sediment accumulation per year m<sup>3</sup></b>			
<b>Sediment Flux</b>	Alternative 1	Alternative 2	Alternative 3
<b>High - 3.6 m<sup>3</sup>m<sup>-1</sup>yr<sup>-1</sup></b>	2,603	1,714	3,018
<b>Medium - 2.1 m<sup>3</sup>m<sup>-1</sup>yr<sup>-1</sup></b>	1,518	1,000	1,760
<b>Low - 0.8 m<sup>3</sup>m<sup>-1</sup>yr<sup>-1</sup></b>	578	381	670

Note that Alternative 3 has a greater impact because it is oriented diagonally and has an increased exposure to the wind transport corridor.

To put these values in the context of vehicle journeys a medium size dump truck has a capacity of approximately 5 m<sup>3</sup> while a large dump truck has a capacity of around 10 m<sup>3</sup>.

**2. How far downwind of the project site would the sand have to be trucked before it could be released into the wind stream, and thus what is the area in the lee of the project that would be impacted?**

Large objects and fences act as windbreaks that reduce downwind wind velocities and sediment transport rates, creating a lee zone. If sand was transferred from the upwind fence to the lee zone it would not be subsequently re-transported, defeating the point of the mitigation program. In designing a potential mitigation program as well as to calculate the area that will not be protected by mitigation we therefore need to know how far downwind the lee zone will lie.

The width of the lee zone is typically expressed as a factor of the height of the wind break, which is the downwind fence or the nearest high obstructions in the substation. A literature review suggested that for wind striking a barrier at 45° to perpendicular the lee distance in which erosion would be reduced is more than 20 times the barrier height. For example, Heisler and DeWalle, 1988 state: “Measureable reductions in windspeed have been recorded as far as 50 h to the lee of windbreaks, and rarely, even farther. Reductions of 20% or more may extend to about 25 h from the windbreak.” Note that sediment transport capacity is a function of the cube of wind velocity, so a 20% reduction in velocity has a much greater effect on sediment transport capacity. Skidmore and Hagen (1977) mathematically modeled the effect of wind fences oriented at 45° to the wind direction on wind shear stresses (the driving force for sediment transport) and found that stresses returned to upwind boundary levels at 22 x the barrier height. These studies suggest that a distance of about 25 x the barrier height is appropriate for reintroducing sand into the transport corridor, and that the area between the fenceline and 25 x the height of the barrier should be considered impacted. Figures from the studies cited above are shown in Figure 3. Note that several publications use a value of 10:1 for the lee distance. These however seem to be derived from studies conducted to calculate a barrier spacing for soil conservation purposes, so that within 10 barrier heights practitioners can be confident there will be little or no sediment erosion. Our goal in developing a mitigation scheme is to have pre-project levels of sediment erosion, requiring a larger fetch downwind of the barrier. Thus for an 8 foot high wind fence we propose a 200 foot wide lee area, beyond which sand could be reintroduced into transport.

**3. What elements would go into a potential mitigation program?**

A potential mitigation scheme would have the following elements: an upwind sand collection area primarily on the western project boundary; a haul road around the north and south sides of the project (along which some additional sand collection might be necessary); a lee zone downwind of the project site in which the winds were too muted to transport sand; and a sand injection zone outside the lee zone where sand from upwind could be made available for entrainment downwind.

***Upwind collection area (western boundary)***

The project would have an upwind barrier such as a sand fence or a wall against which sand would accumulate, and from which it could be scraped. For example, it might consist of ‘k-rails’ or Jersey Barriers (concrete temporary highway barriers) which are 32 inches high and would withstand scraping. Once sand reached a threshold level (e.g. 3 feet of sand accumulated at the toe of the wall) the sand would be scraped up into trucks and hauled around the project site. We recommend designating a 50 foot wide impact zone upwind of the boundary to allow for heavy machinery to collect, load and haul sand, and to allow vehicles to turn. The equipment would likely consist of a loader to scrape sand from the wall, and a dump truck to haul the sand around the site.

### **Haul road (north and south boundaries)**

The majority of sand should accumulate along the western boundary, and the northern and southern boundaries should be used primarily for hauling. However, we anticipate that some sand may accumulate along the northern and southern boundaries due to the prevailing northwesterly and southeasterly winds, and that occasional sand removal may be necessary. We recommend a smaller impact area along these boundaries due to the less frequent need for heavy equipment, with a 25 foot boundary.

### **Downwind lee zone**

Sand collected along the upwind boundaries would be trucked around the project and deposited a sufficient distance downwind to be away from the sheltered lee side of the project site. This distance should be 25 times the height of the downwind fenceline, or the highest continuous barrier to wind transport within the project site. The distance between the downwind project fence (or other obstructions) and the point at which sediment transport occurred at similar levels to the pre-project condition would be considered a direct impact area.

### **Sand replenishment zone**

Beyond the lee zone sand should be deposited in strips oriented parallel with the downwind fenceline. Sand should be distributed evenly along the downwind boundary rather than concentrated in a few isolated piles. The surface of the sand strips should be periodically disturbed to prevent vegetation or crusts from stabilizing the sand. The combination of hauling, dumping and sand disturbance means that this zone (with a width of 25 feet) should be considered directly impacted.


The total area impacted by sand collection, hauling and dispersal would be as follows:

	<b>Alt 1</b>	<b>Alt 2</b>	<b>Alt 3*</b>
<b>N-S Distance (feet)</b>	2400	1600	na
<b>E-W Distance (feet)</b>	1600	2400	na
<b>Direct impact area (acres)</b>	88.2	88.2	88.2
<b>Fence height (feet)</b>	8.0	8.0	8.0
<b>Sand collection zone width (feet)</b>	50	50	50
<b>Sand collection zone area (acres)</b>	2.8	1.8	4.0
<b>Northern trucking zone width (feet)</b>	25	25	0
<b>Northern trucking zone area (acres)</b>	0.9	1.4	0.0
<b>Southern trucking zone width (feet)</b>	25	25	25
<b>Southern trucking zone area (acres)</b>	0.9	1.4	1.2
<b>Lee area width (feet)</b>	200	200	200
<b>Lee area (acres)</b>	11.0	7.3	7.0
<b>Dispersal area width (feet)</b>	25	25	25
<b>Dispersal area (acres)</b>	1.4	0.9	0.9
<b>Total impact due to sand mitigation (acres)</b>	17.0	12.9	13.1
<b>Total impact (acres)</b>	105.2	101.1	101.3

\*Note that due to its oblique orientation the areas for Alt 3 were calculated differently, as shown in Figure 4.

#### **4. References**

- Fryrear, D.W. and Bilbro, J.D. Wind erosion control with residues and related practices. In: Unger, P.W. (Editor) 1994, p.12. Managing agricultural residues. CRC Press.
- Heisler, G.M. and DeWalle, D.R. 1988. Effects of windbreak structure on wind flow. Agriculture, Ecosystems and Environment, Volume 22-23, p 41-69.
- Kenney, M. 2010. Preliminary Geomorphic Aeolian Report: Colorado River Substation, Riverside County, CA
- Kocurek, G. and Lancaster, N. 1999. Aeolian system sediment state: theory and Mojave Desert Kelso dune field example. Journal of Sedimentology 46, p. 505-515.
- Lancaster, N. and Baas, A. 1998. Influence of vegetation cover on sand transport by wind: field studies at Owens Lake, California. Earth Surface Processes and Landforms, Volume 23, p. 69-82.
- Muhs, D.R., Reynolds, R.L., Been, J. and Skipp, G. Eolian sand transport pathways in the southwestern United States: importance of the Colorado River and local sources. Quaternary International Volume 104, pages 3-18, 2003.
- Sharp, R.P. 1964. Wind-driven sand in Coachella Valley, California. Geological Society of America Bulletin, volume 75, p. 785-804. Cited in Griffiths et al. 2002.
- Sharp, R.P. 1980. Wind-driven sand in Coachella Valley, California: Further data. Geological Society of America Bulletin, volume 91, p. 724-730. Cited in Griffiths et al. 2002.
- Skidmore, E. L. and Hagen, L. J. 1977. Reducing Wind Erosion with Barriers. Transactions of the American Society of Agricultural Engineers, Vol. 20, No. 5, p. 911-915
- USDA. 1982. Erosion Handbook – Wind and Water, Section EH-2 (Texas edition), Soil Conservation Service, USDA, Washington DC.

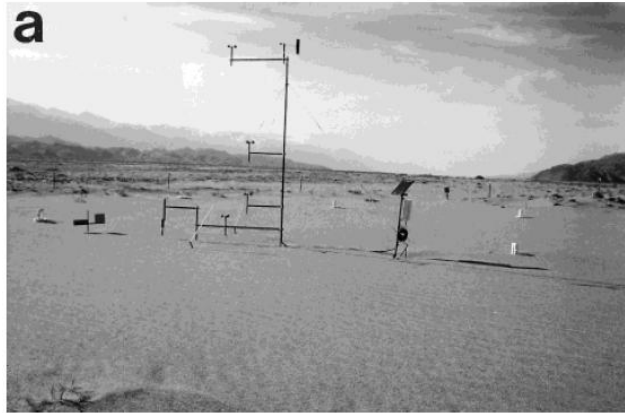

Plates a-d from Lancaster and Baas, 1998, Figure 2, showing relationship between vegetation and sediment transport at Owens Lake, CA. Plate a represents 100% of maximum sediment rate for the wind regime and sand supply. Plate b has 46% of the sand transport rate of Plate a. Plate c has 10% of the transport rate of Plate a. Plate d has 4% of the sand transport rate of Plate a.

*figure 1*  
Colorado River Substation


Relationship between sediment transport rate and vegetation cover for Owens Lake

PWA Ref# 2039






**e** Kelso dunes  
(sediment flux =  $7.86 \text{ m}^3 \text{ m}^{-1} \text{ yr}^{-1}$ )

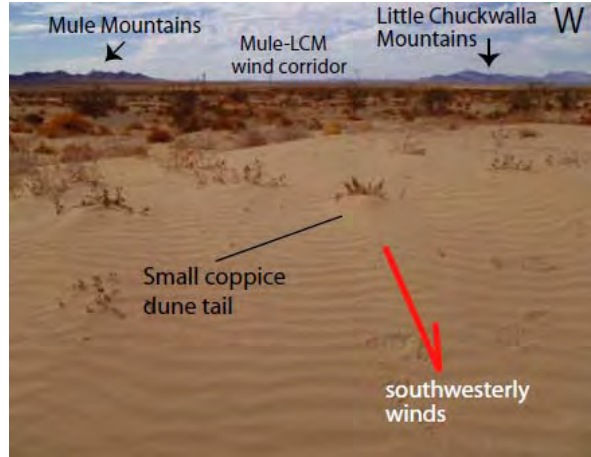

**f** The project site – Zone A  
(sediment flux assumed to be  $2.2 \text{ m}^3 \text{ m}^{-1} \text{ yr}^{-1}$ )

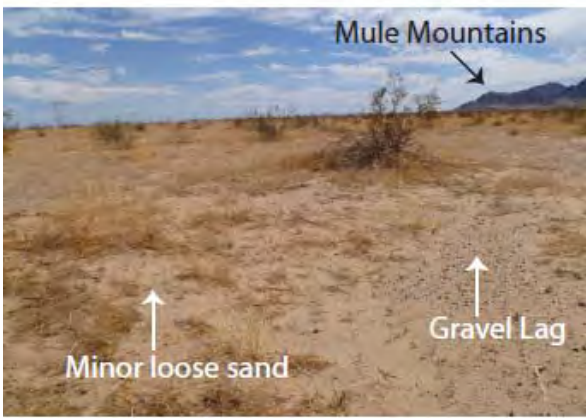

**g** The project site – Zone B  
(sediment flux assumed to be  $0.6 \text{ m}^3 \text{ m}^{-1} \text{ yr}^{-1}$ )



**h** Whitewater Floodplain Preserve  
(maximum sediment flux =  $0.2 \text{ m}^3 \text{ m}^{-1} \text{ yr}^{-1}$ )

Source:  
Plate e – Andy Tomaselli via Panoramio and Google Earth  
Plate f – Kenney (2010)  
Plate g – Kenney (2010)  
Plate h - W.N. Weber via Panoramio and Google Earth

*figure 2*  
*Colorado River Substation*

Visual comparison of the project site and sites with sediment transport data

PWA Ref# 2039





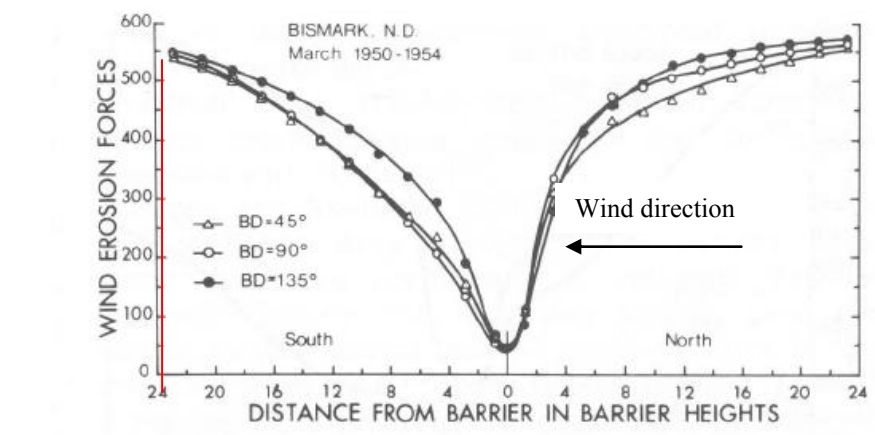


FIG. 4 Wind erosion forces at indicated distances perpendicular from 40 percent-porous barrier when the barrier direction [BD] is 45, 90 (east-west), and 135 deg, respectively. Wind data are for Bismark, ND.

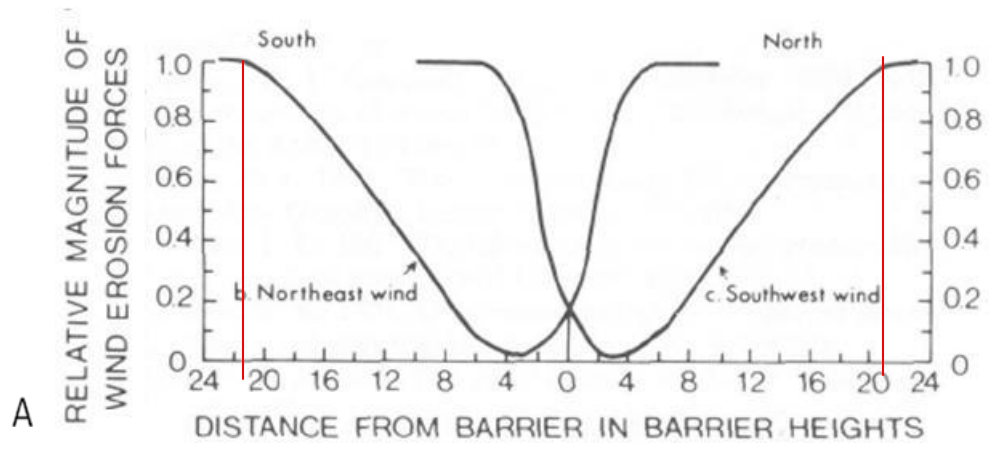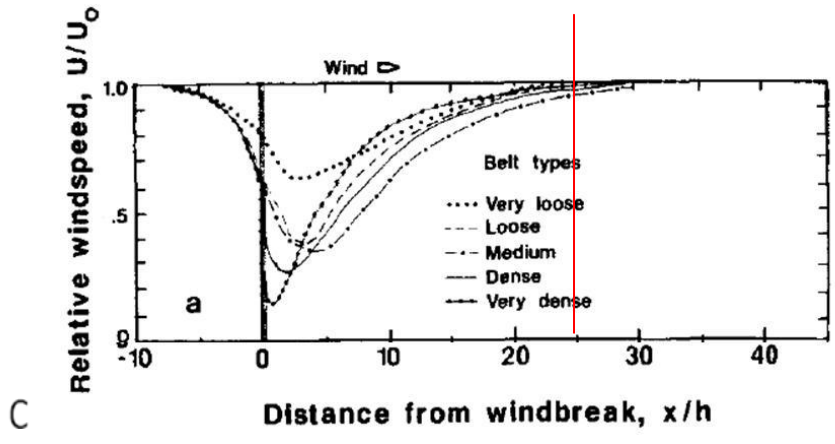


Sources:  
 A – Skidmore and Hagen, 1977  
 B – Skidmore and Hagen, 1977  
 C – Heisler and DeWalle 1988

Note: red line indicates point where downwind erosion potential is restored to upwind potential

*figure 3*  
 Colorado River Substation

Effects of wind barriers on wind speed and sediment transport potential

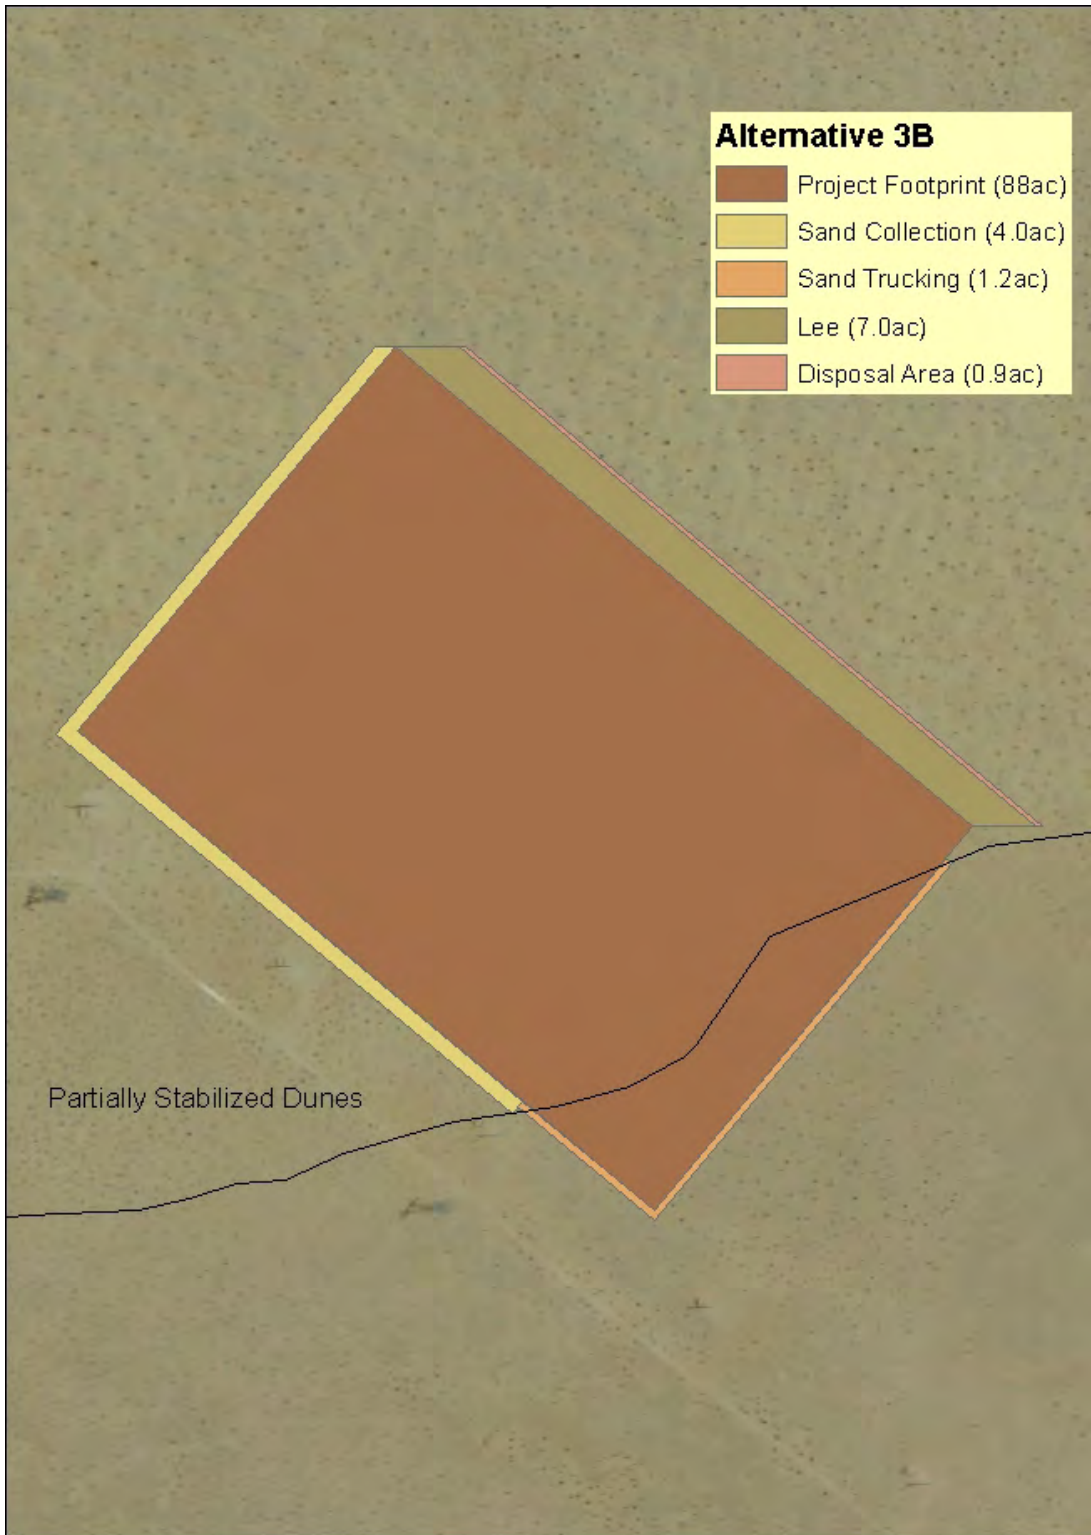

*figure 4*  
Colorado River Substation

Layout of Alternative 3 used to calculate sand mitigation areas

PWA Ref# 2039





J:\2039\_CRSS\_Sand\_Analysis\Report\Figures\CAD\Figure 1.dwg 12-14-10 05:38:38 PM bdt







figure 4  
 Colorado River Substation  
**Sand Transport Mitigation Plan**  
 PWA Ref. # 2039

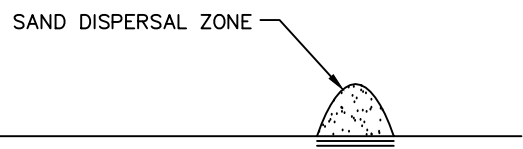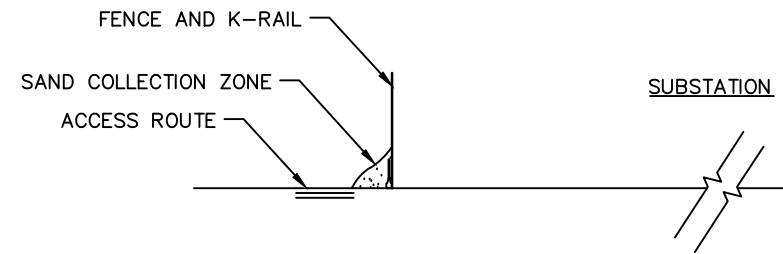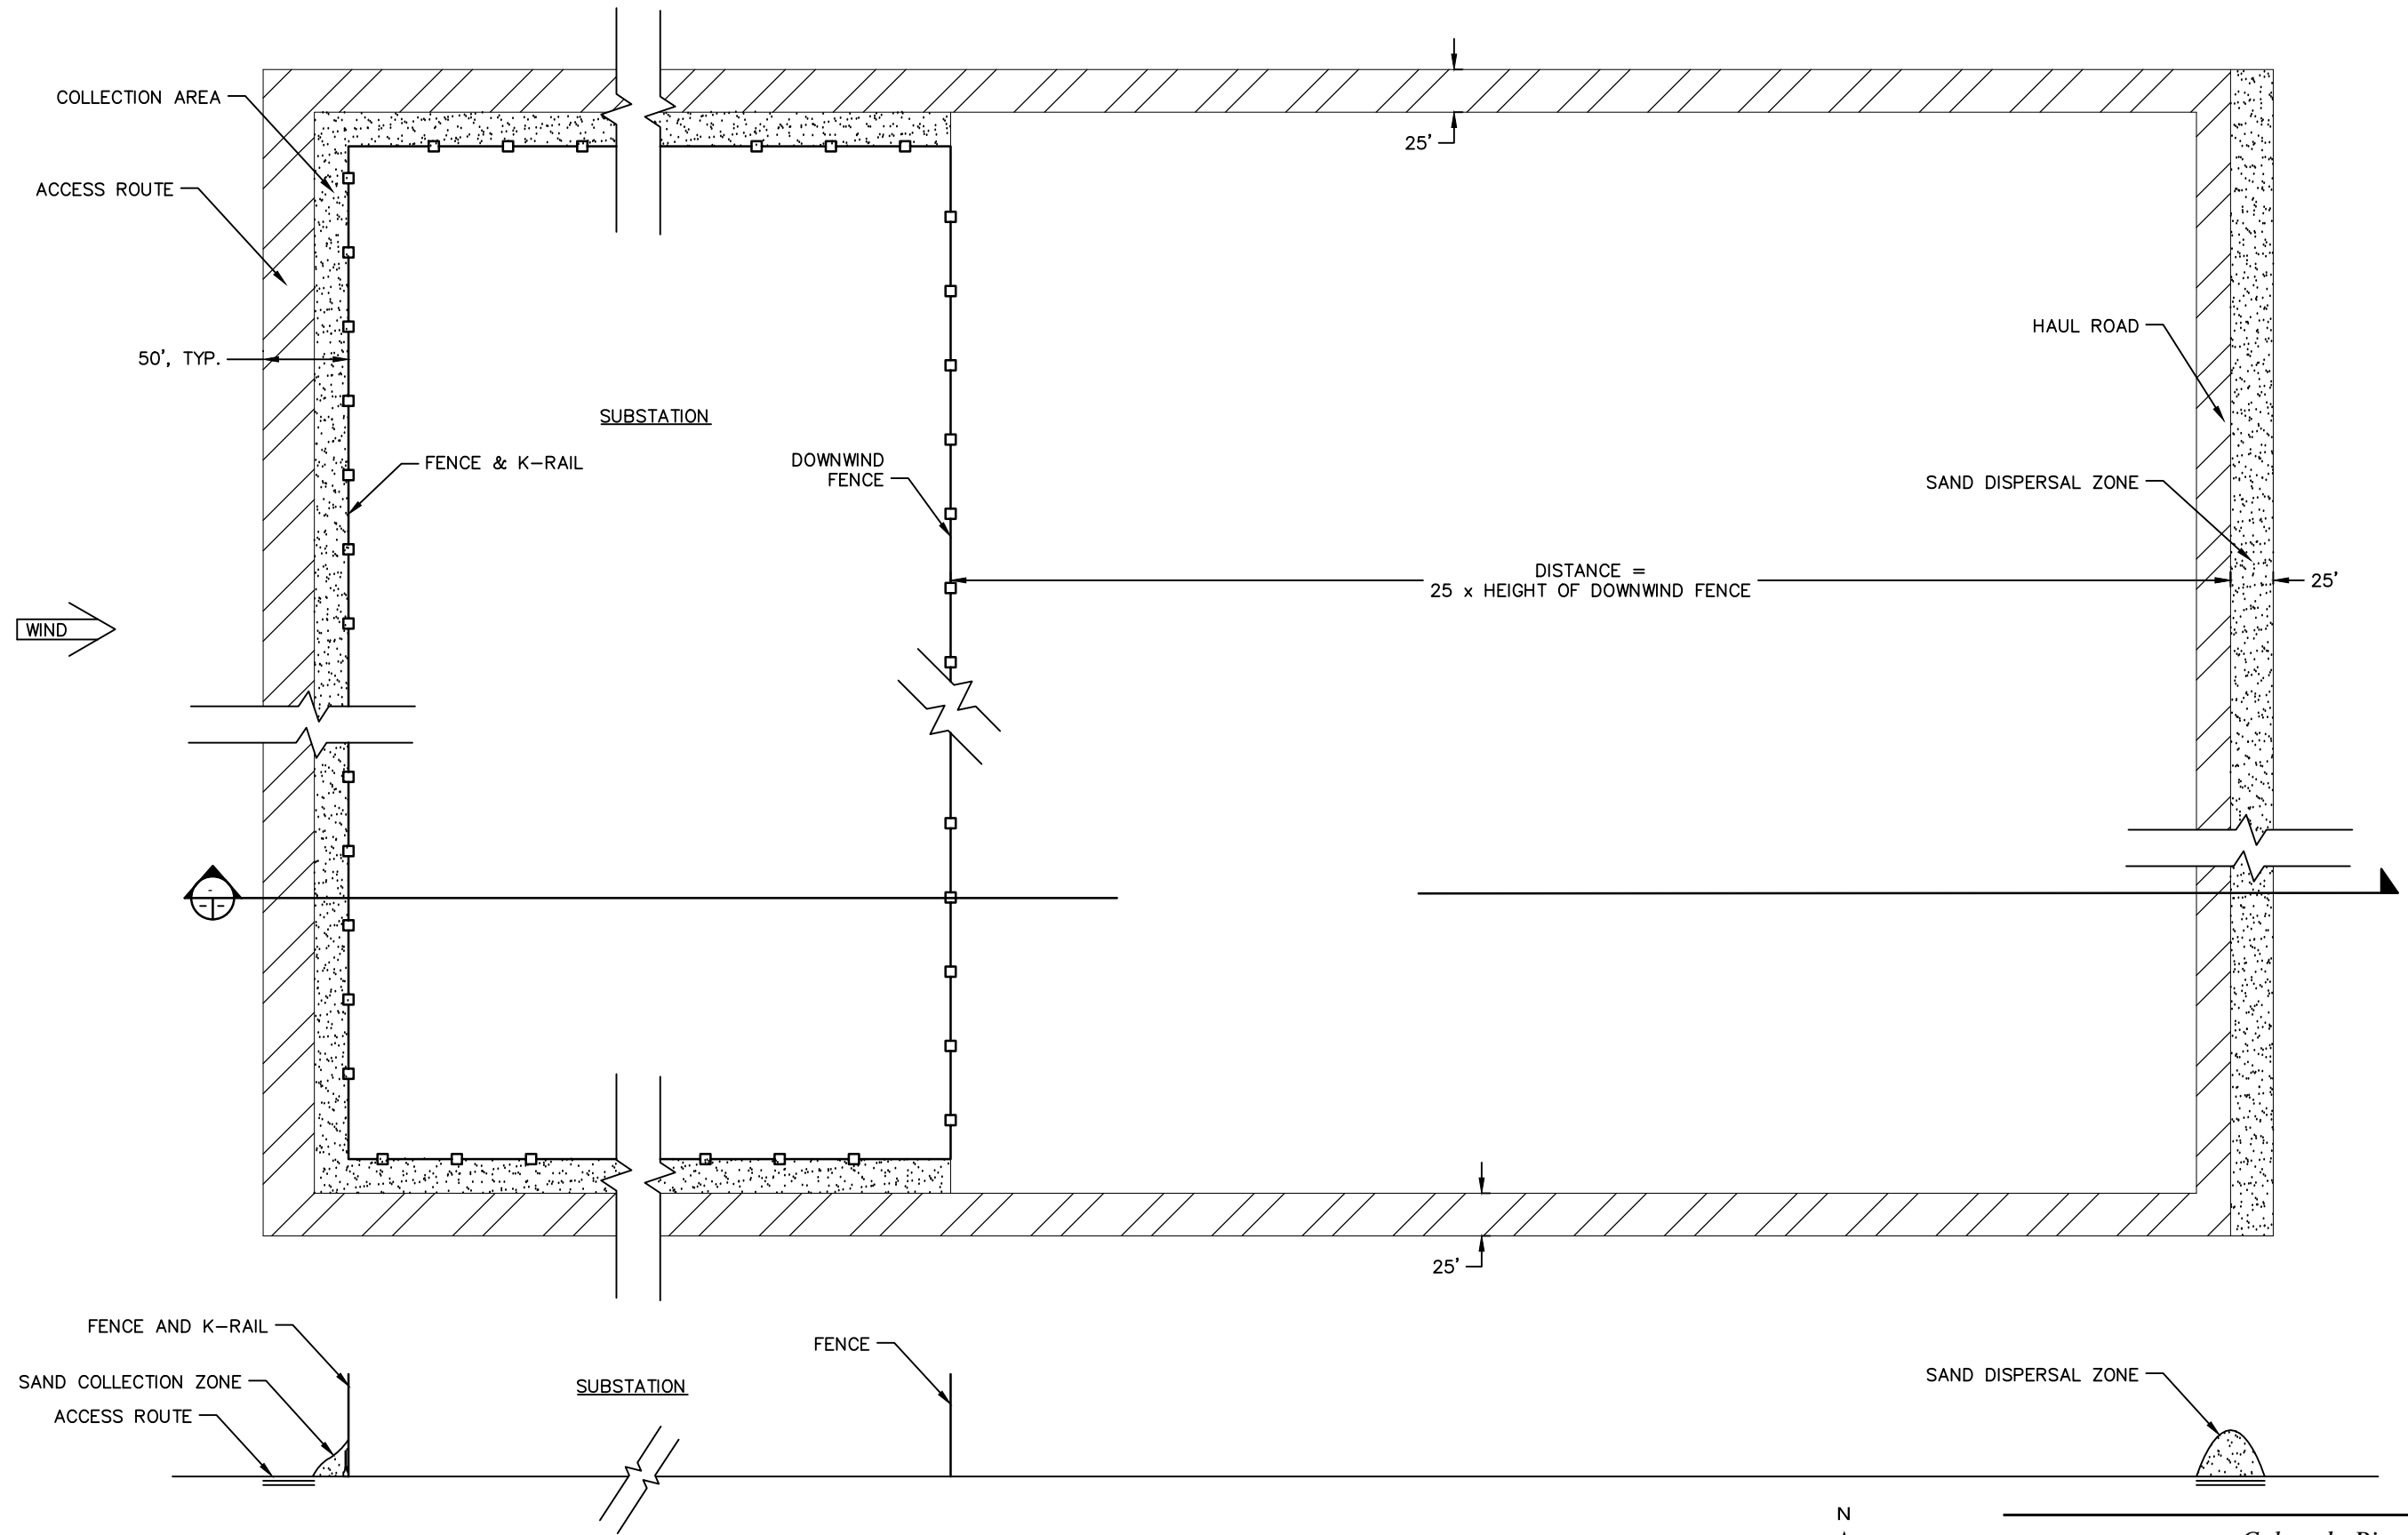