



Energy-Environmental Economics

Workshop Discussion: Using Avoided Costs to Set SB32 Feed-in Tariffs

SB32 Workshop
September 26th, 2011



Agenda

- + **Legislative direction on SB32 feed-in tariff**
- + **Framework for using avoided costs**
- + **'Results' from most recent avoided costs in CSI**
- + **Complexities of delivering the value to ratepayers**
- + **Proposal for discussion**



Legislative Direction for Setting Feed-in Tariff Pricing for Renewables

+ **(SB 2 1X): California Renewable Energy Resources Act amends provisions of the Public Utilities Code § 399.20(d) relating to price for generation**

- Price no longer tied to the cost containment provision of the Renewables Portfolio Standard (RPS)
- Previously, pricing for electric generation under § 399.20 was tied to the Market Price Referent (MPR) – this connection to the MPR no longer applies

+ **FIT based on avoided cost mechanism**

- Supported by ratepayer indifference provision in SB 32 and § 399.20(e) of Public Utility Code



Framework for Using Avoided Costs

- + **Feed-in tariff price to be based on avoided renewable purchases plus additional ratepayer value**

$$\text{Feed-in Tariff Price} = \text{RAM} + \text{Avoided Costs}$$

- + **Energy Division proposed approach is to set a base price from the Renewable Auction Mechanism (RAM)**
 - Provides a price for peaking as available, baseload, non-peaking as-available resources
 - Projects of size 20MW or under, location is unconstrained
- + **Additional avoided costs for feed-in tariff projects is set based on latest avoided costs**
 - Additional value based on 'local' resources
 - Area-specific avoided costs
 - Avoided cost components; transmission, distribution, losses



Definition of 'Local' Resource

+ Definition for purposes of calculating additional value to ratepayers

- Renewable generators connected to the distribution system and serving load on the distribution system to which they are connected
- Evaluated using a 'no backflow' proxy meaning the output is never greater than the minimum load on distribution system

+ Since the feed-in tariff avoided cost is based on being a 'local' resource, CPUC proposes to require SB32 projects to be 'local'

- This won't affect most projects that are 3MW or less
- Limits large generators connected to small distribution systems



History of Avoided Costs in California

+ CPUC has used area- and time-specific avoided costs for valuing distributed resources since 2004

- Provides long-term hourly forecast of the cost of delivering a kWh by hour to a specific location for 30 years
- Locations have varied by climate zone

+ Current uses of area-specific avoided costs cover all distributed resources

- Energy efficiency cost-effectiveness
- Self-Generation Incentive Program cost-effectiveness
- California Solar Initiative cost-effectiveness
- Demand Response cost-effectiveness



Components of Avoided Costs

- + **Energy**
- + **Generation Capacity**
- + **Ancillary Services**
- + **CO₂, NO_x, PM₁₀ reductions**

These are provided by RAM projects as well, so are not additional value.

- + **Transmission Capacity**
- + **Distribution Capacity**
- + **Losses**

'Local' resources provided these values in addition to RAM projects.



Most Recent Update to Avoided Costs

+ E3 is near completion of a study of 'local' PV

- Expected release in 4th Quarter 2011

+ Avoided costs reflect most recent information

+ Updates include

- Most recent distribution capital expansion plans from utilities (however, vintage is still up to 3 years old)
- Updated transmission marginal cost

+ Higher granularity on area differentiation

- Distribution planning area rather than climate zone



Data Sources for Distribution Cost

+ Capital budget plans and load growth provided by each IOU in response to CPUC data request

- Capital budget plans isolated to load growth driven investments
- Load growth by area provided in data request

+ Defining "Distribution Areas"

- SCE defined by SYS ID areas; broader than other IOUs
- PG&E defined by DPAs
- SDG&E by distribution substation


+ Adjustments for Capital Budget Horizon

- PG&E and SDG&E 4-year capital plans are adjusted to reflect longer horizons, assuming investments recur after 15 years in calculating avoided distribution value
- SCE provided 9 year capital budget plans and no adjustment is being made to those



Distribution Avoided Costs

Distribution Avoided Costs by Planning Area (\$/kW-year):

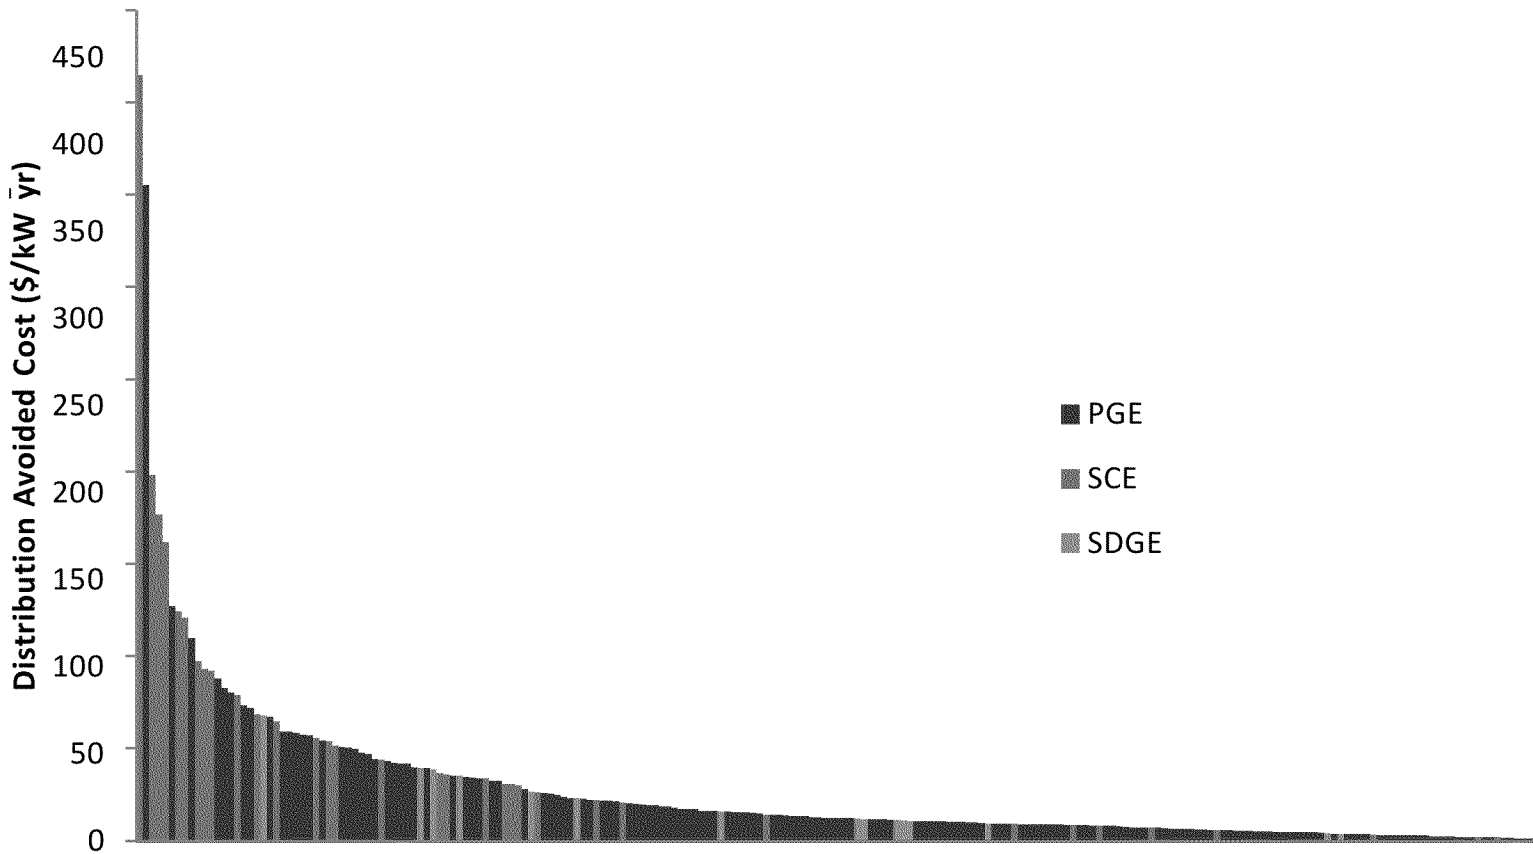



Transmission and Losses

+ **Network transmission similarly based on growth driven projects. Broader regional value**

Transmission Capacity Value	
	\$/kW-year
PG&E	\$ 19.29
SCE	\$ 22.93
SDG&E	\$ 20.66

+ **Losses based on avoided cost estimates by utility**

TOU	Description	PG&E	SCE	SDG&E
1	Summer Peak	1.109	1.084	1.081
2	Summer Shoulder	1.073	1.080	1.077
3	Summer Off-Peak	1.057	1.073	1.068
4	Winter Peak	-	-	1.083
5	Winter Shoulder	1.090	1.077	1.076
6	Winter Off-Peak	1.061	1.070	1.068



Calculating the Local Value by Distribution Area for each IOU

+ Peaking As-available

- Use simulated photovoltaic output for each substation
- Compute average avoided cost for T, D, and Losses

+ Baseload


- Use flat 8760 profile output
- Compute average avoided cost for T, D, and Losses

+ Non-peaking As-available

- Use flat 8760 profile output
- Multiply T by 20% NQC, remove D, and losses



Example: Avoided Cost Breakdown for an example SCE location

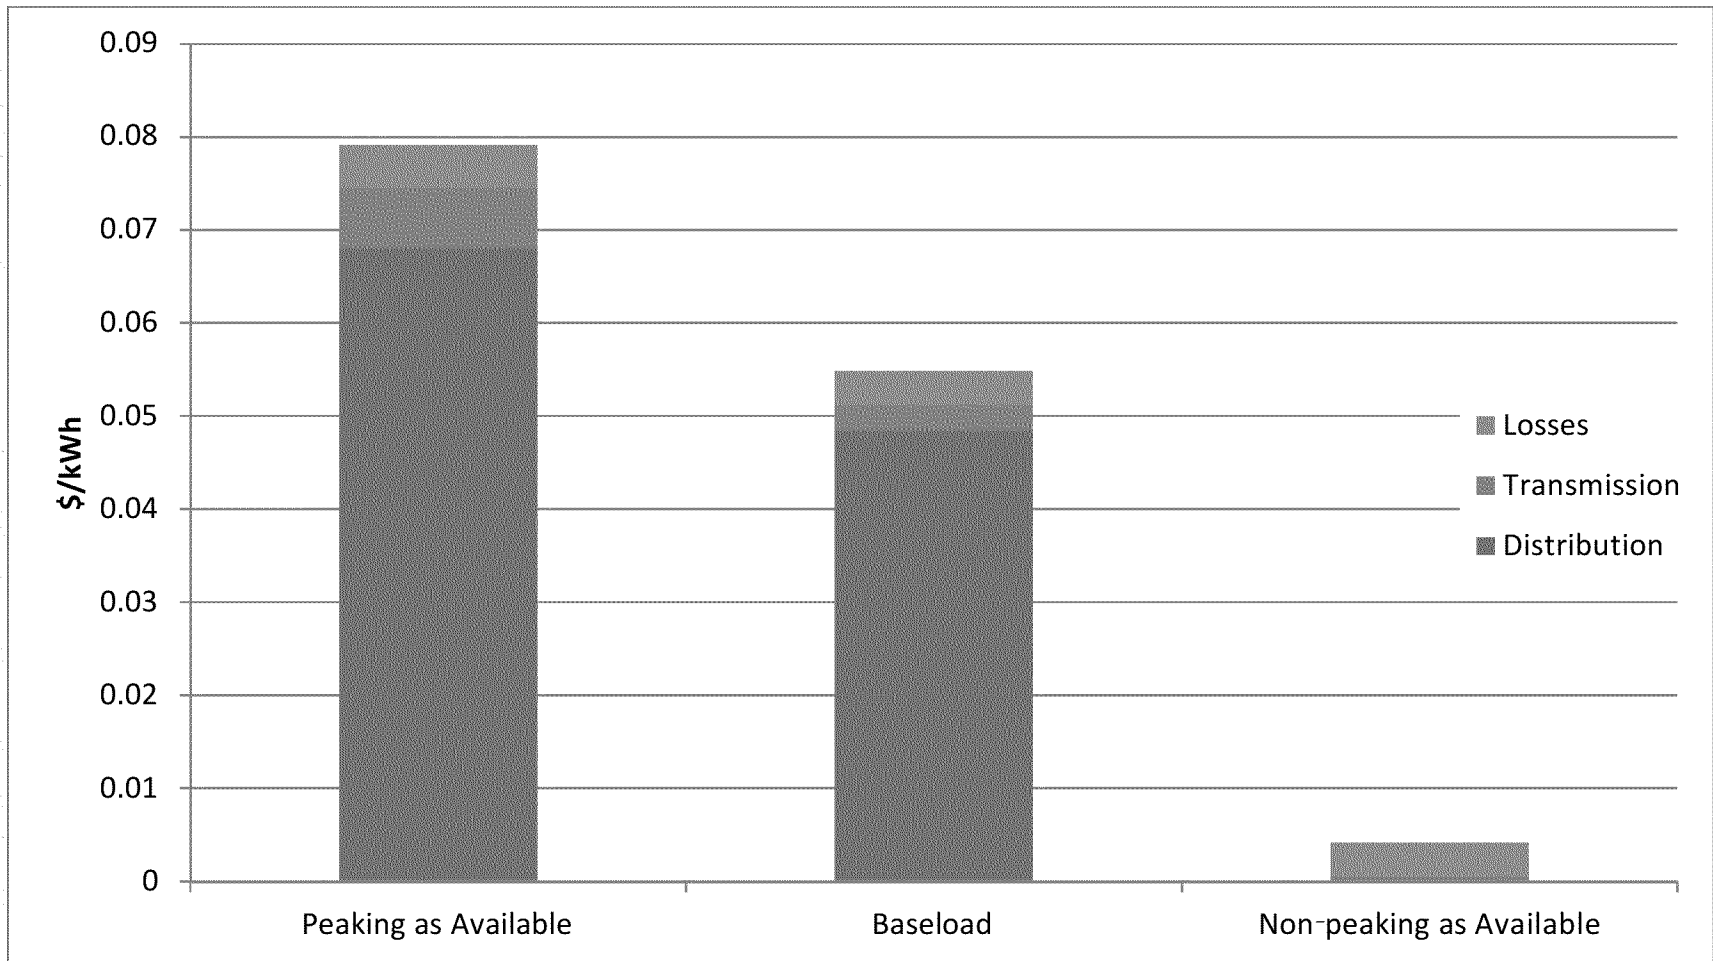



COMPLEXITIES OF DELIVERING VALUE TO RATEPAYERS



Challenges of Capturing Value

+ Distribution

- Majority of avoided cost is distribution capacity savings resulting from deferral of distribution system investments.
- Most challenging to capture because of area-dependent nature and integration with distribution planning process

+ Transmission

- Transmission avoided cost is lower, and location is less important

+ Losses

- Least challenging to capture



Distribution Planning Process

+ Load forecast of growth in an area

- Local area load forecast shows need for capacity expansion, or upgrades to meet reliability criteria

+ Develop distribution upgrade



- Preferred alternative is developed to solve the problem, minimum lifecycle revenue requirement

+ Establish capital budgeting plan

- Expected projects are compiled into a capital budgeting plan. Period of the plan depends on the utility, typically 5 to 10 years





Illustrative Project

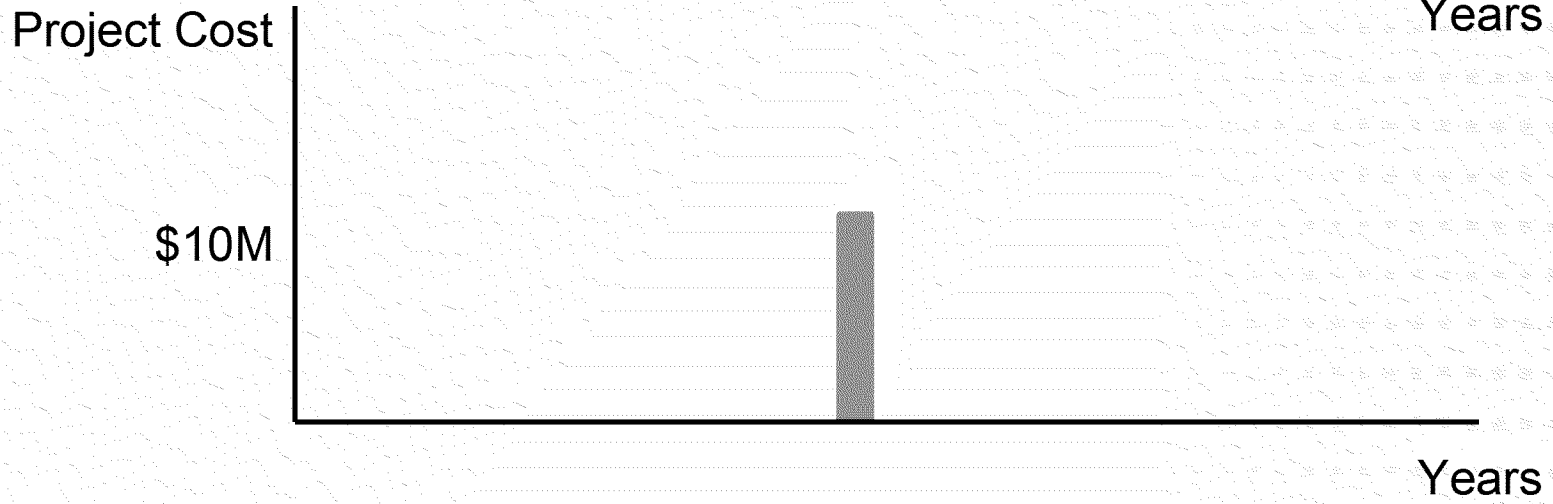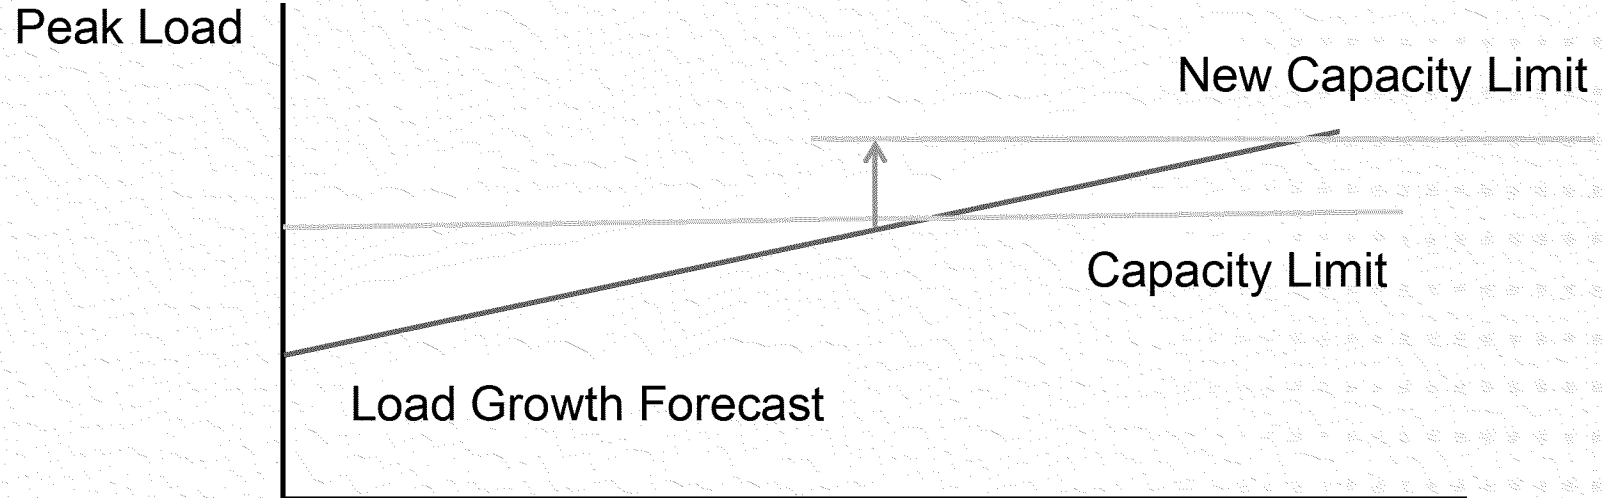



Illustrative Project

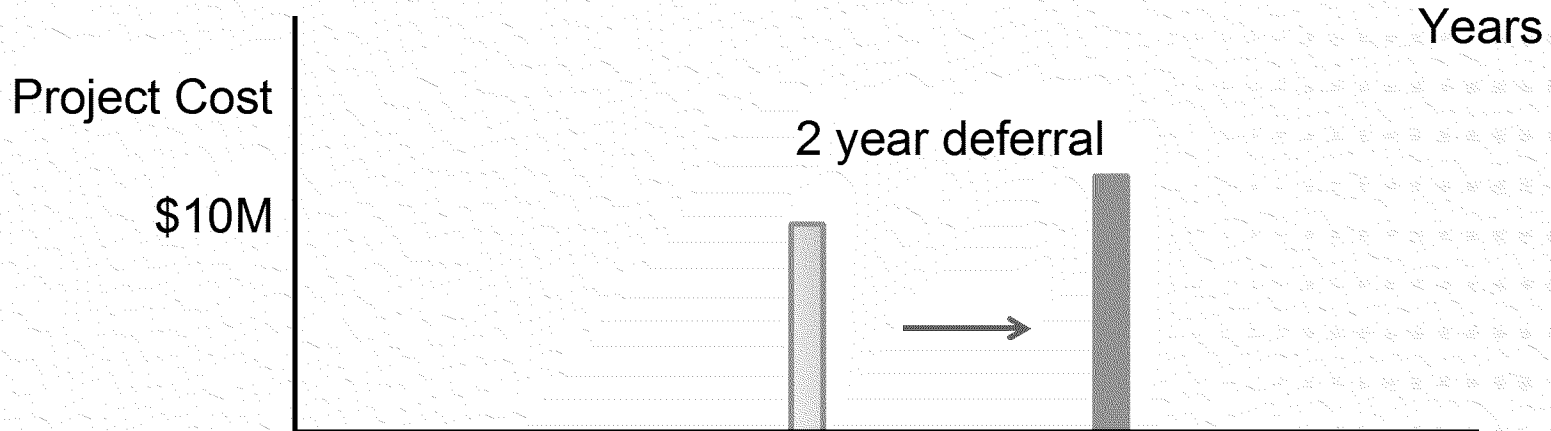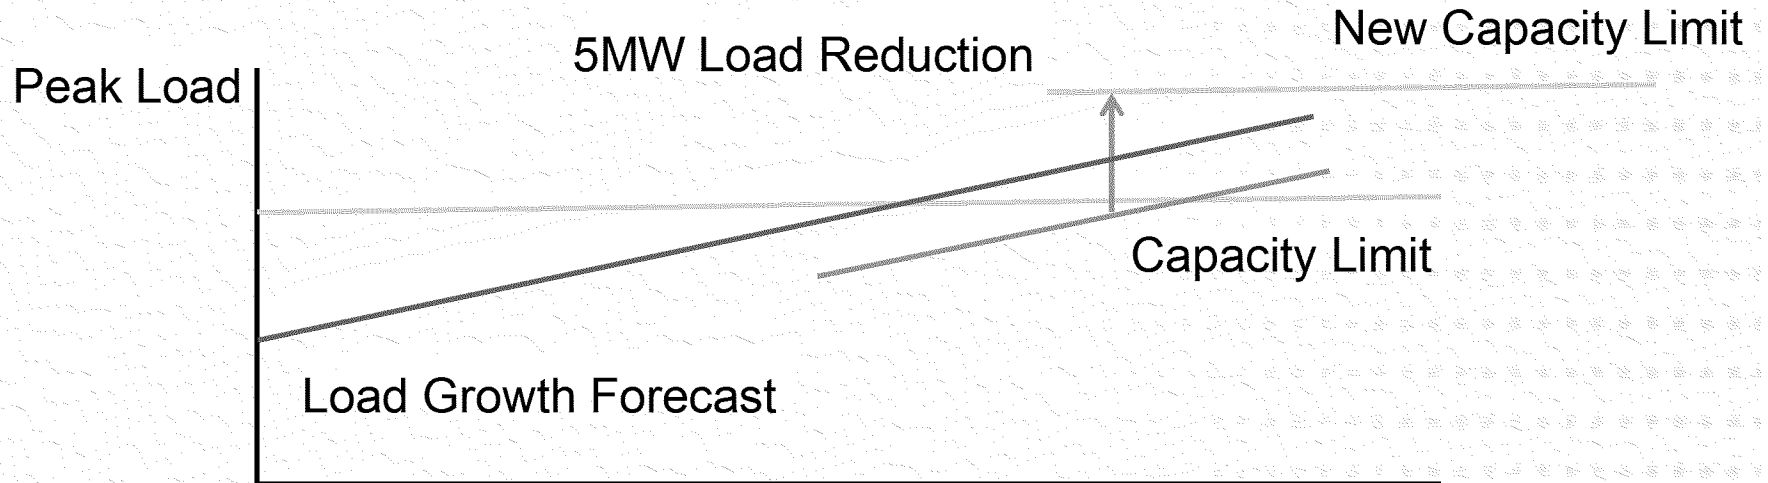



What Was Saved?

+ Original PV of revenue requirement (PVRR)

- \$10 million

+ Deferred PV of revenue requirement (PVRR)

- \$9 million


+ Savings of approximately

- \$1 million = \$10 million * $\frac{(1+2\%)^2}{(1+7.5\%)^2}$
- \$200/kW = \$1 million / 5,000kW
- \$10/kW-year for 20 years = \$200/kW amortized over 20 years

Assumptions: Inflation = 2%, WACC = 7.5%



How does marginal compare with actual savings?

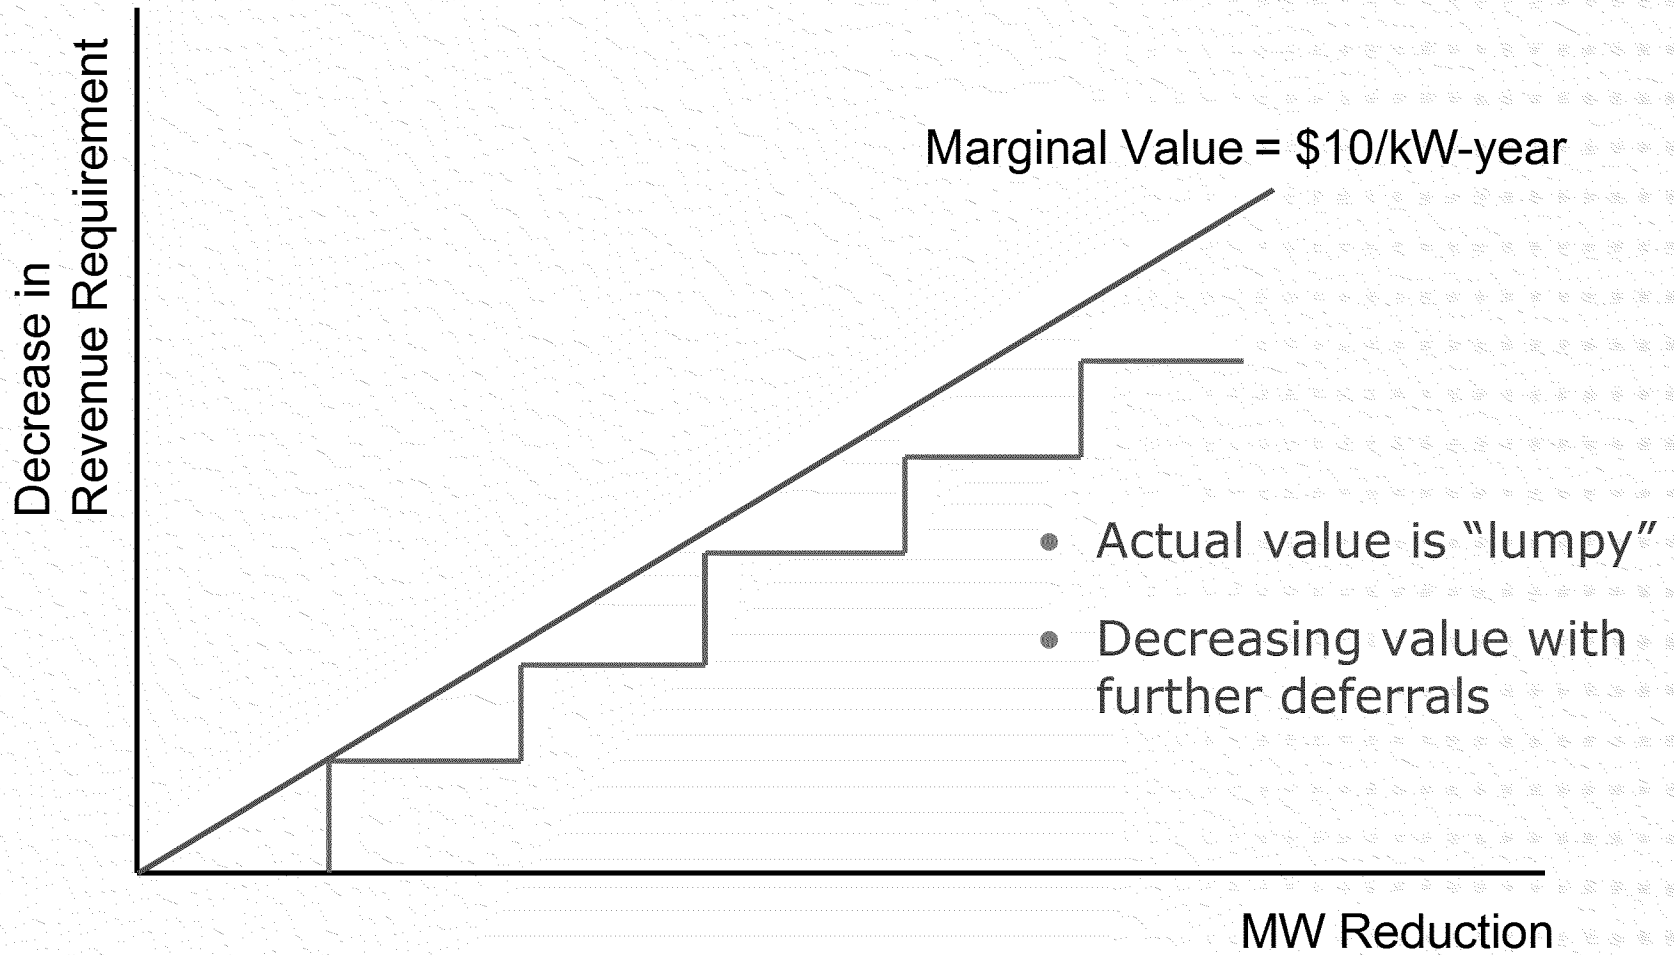



What is Needed to Capture Value?

+ Distribution engineer feels confident in reliability when they actually delay the investment decision

- Sufficient peak load is reduced to defer the investment
- Utility planning process accommodates embedded load





Additional Considerations

+ Utility capital plans are continually updating, as are the load forecasts

- Vintage of the data in our analysis is up to 3 years old

+ Utility capital plans have shorter durations than the life of the renewable DG





PROPOSED APPROACH



Proposed Approach

+ Most recent avoided cost data sets the level of the additional value


- 'Hot' spots have one value
- Other areas have another

+ Utilities choose areas where FIT DG would be most beneficial to the distribution system

- Areas are locked in for 3 to 5 years
- Areas must encompass at least 5-10% of load depending on utility needs
- Additional areas can be designated at any time




Avoided Cost – Peaking as Available

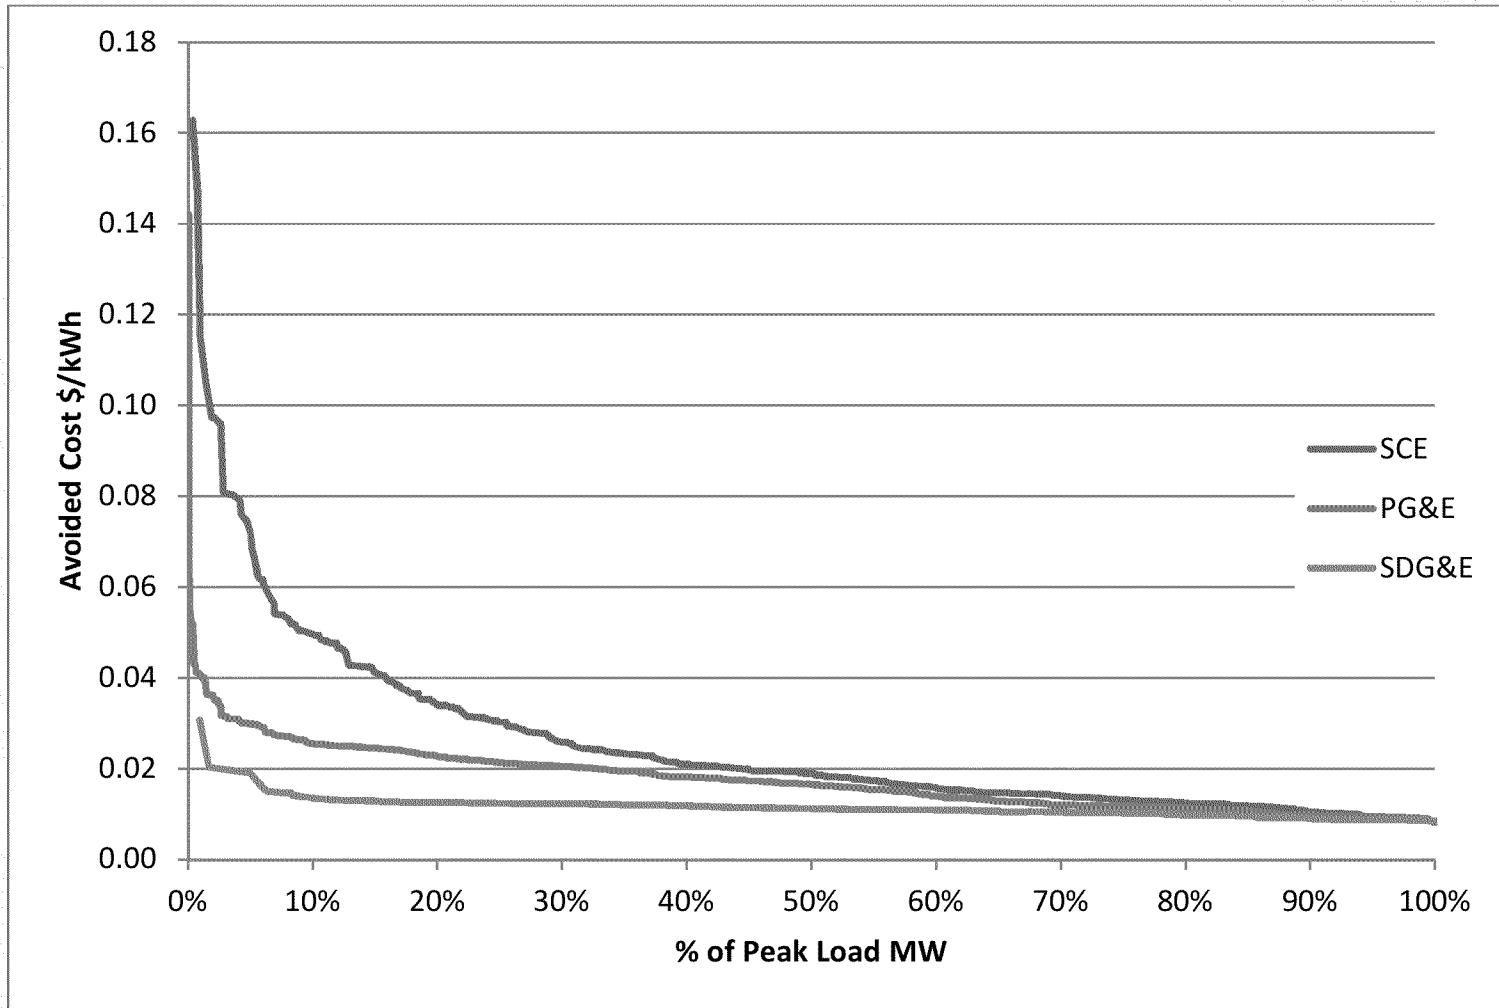




Average Avoided Cost – Peaking as Available

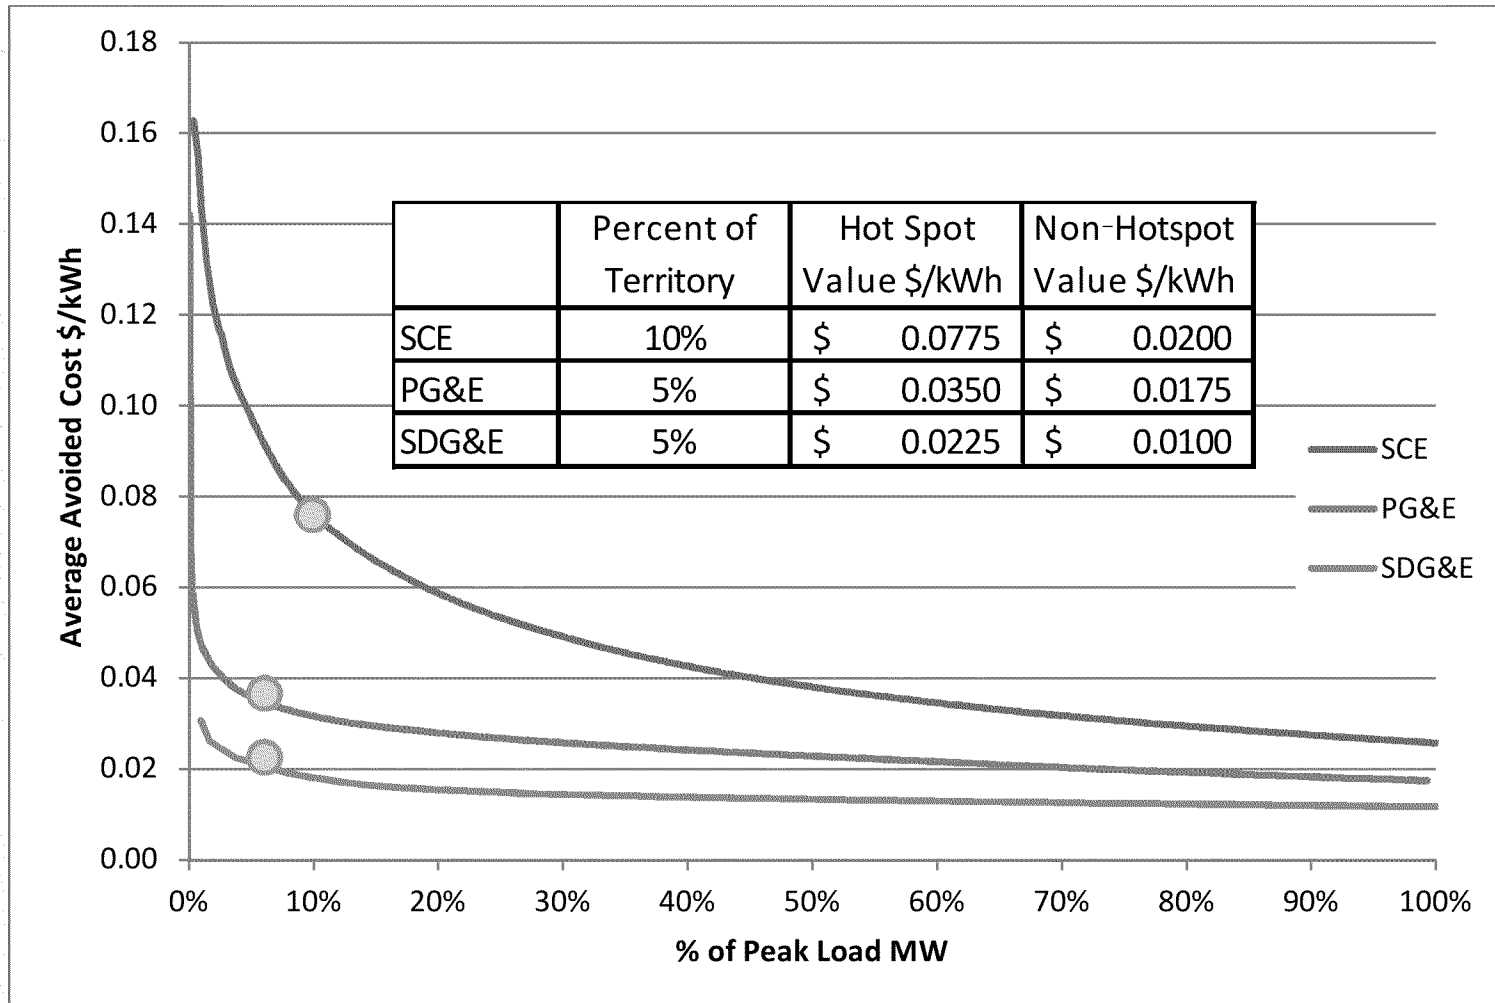

Note: Non-averaged avoided costs shown as semi-transparent line for comparison



Location of Hot Spots from Avoided Cost Data*

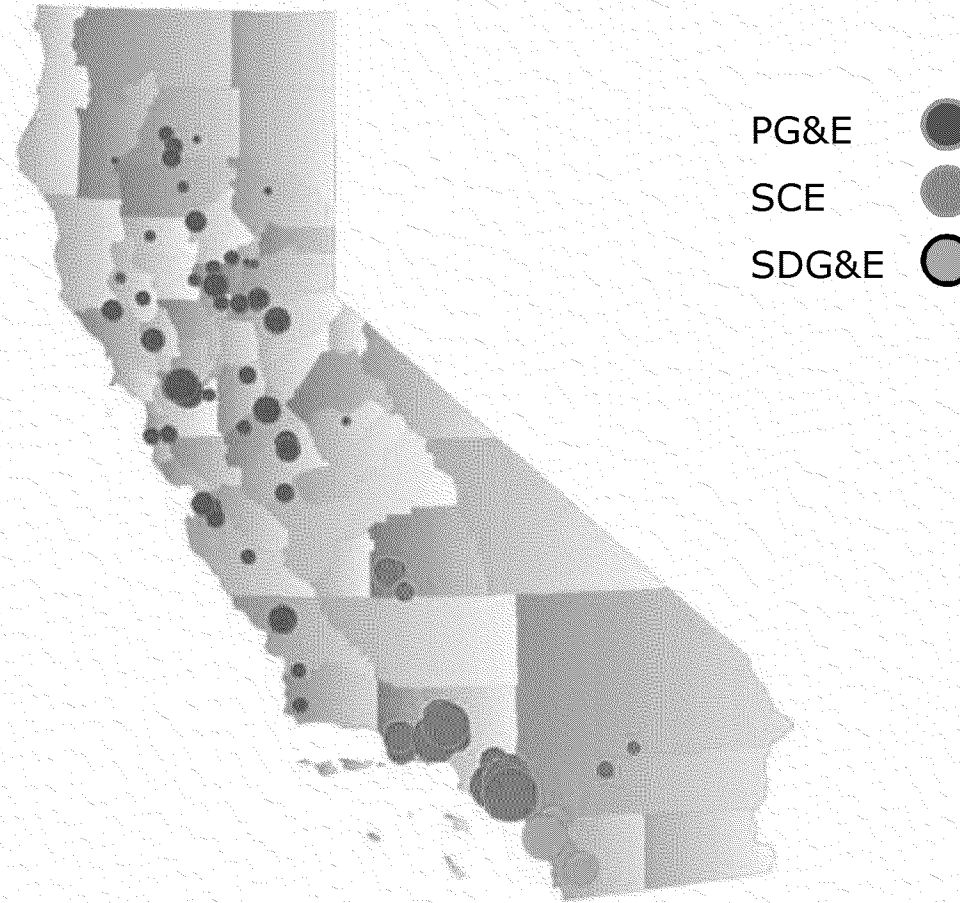


Share of Load Represented

SCE	10% of load
PG&E	5% of load
SDG&E	5% of load

* Proposal is that each utility identify the 'hot spots' in their service territory




Avoided Cost - Baseload

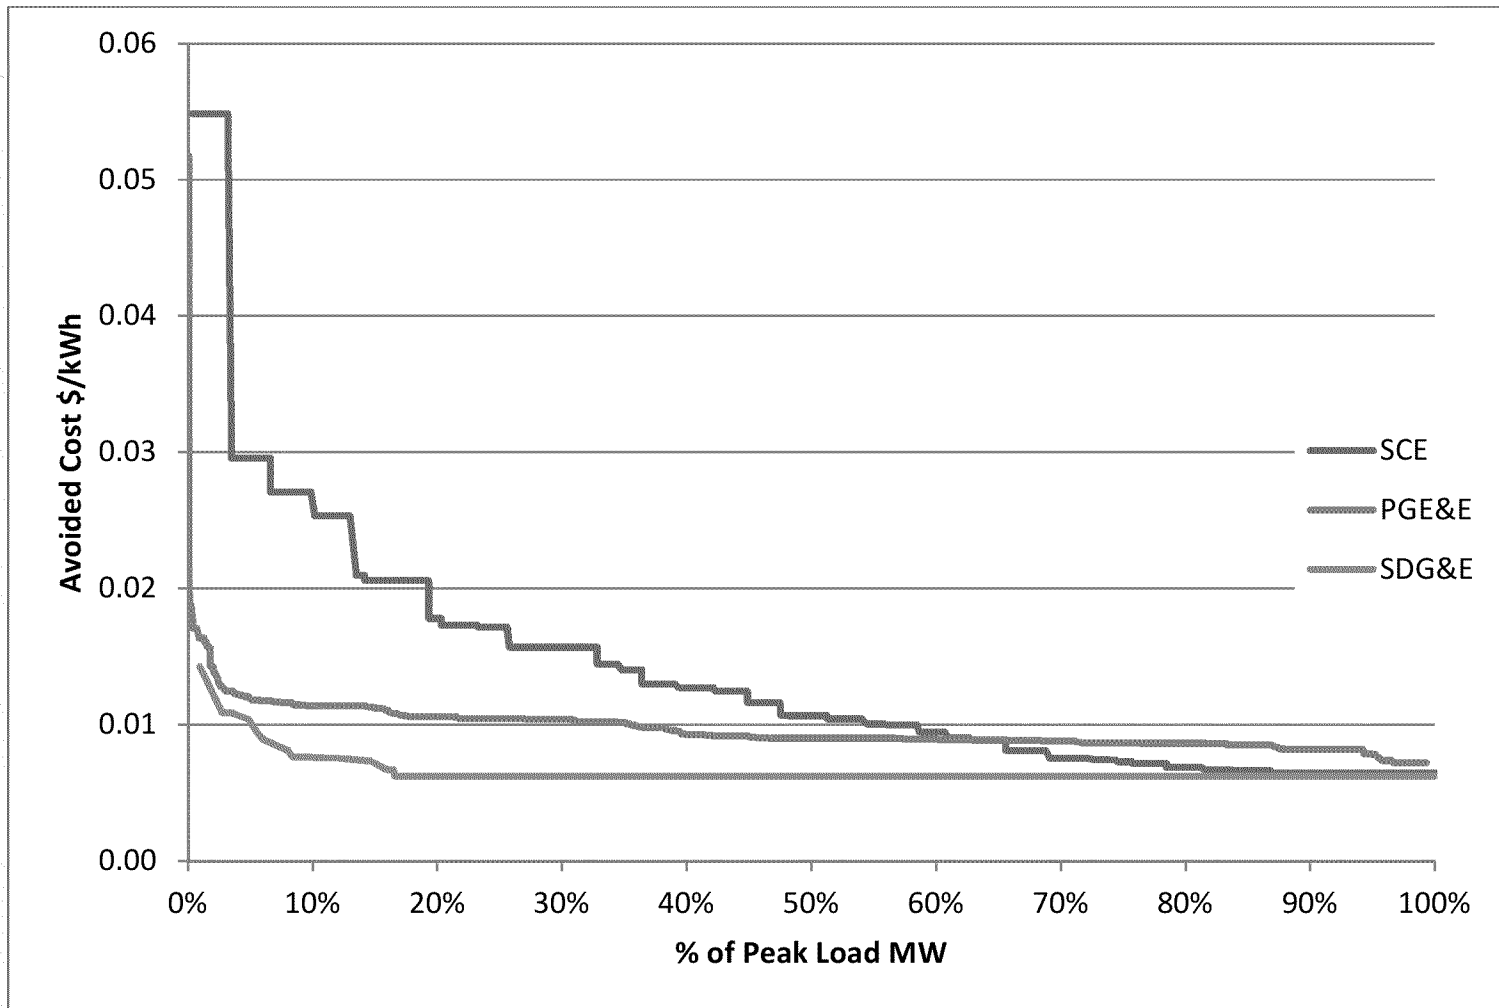




Average Avoided Cost - Baseload

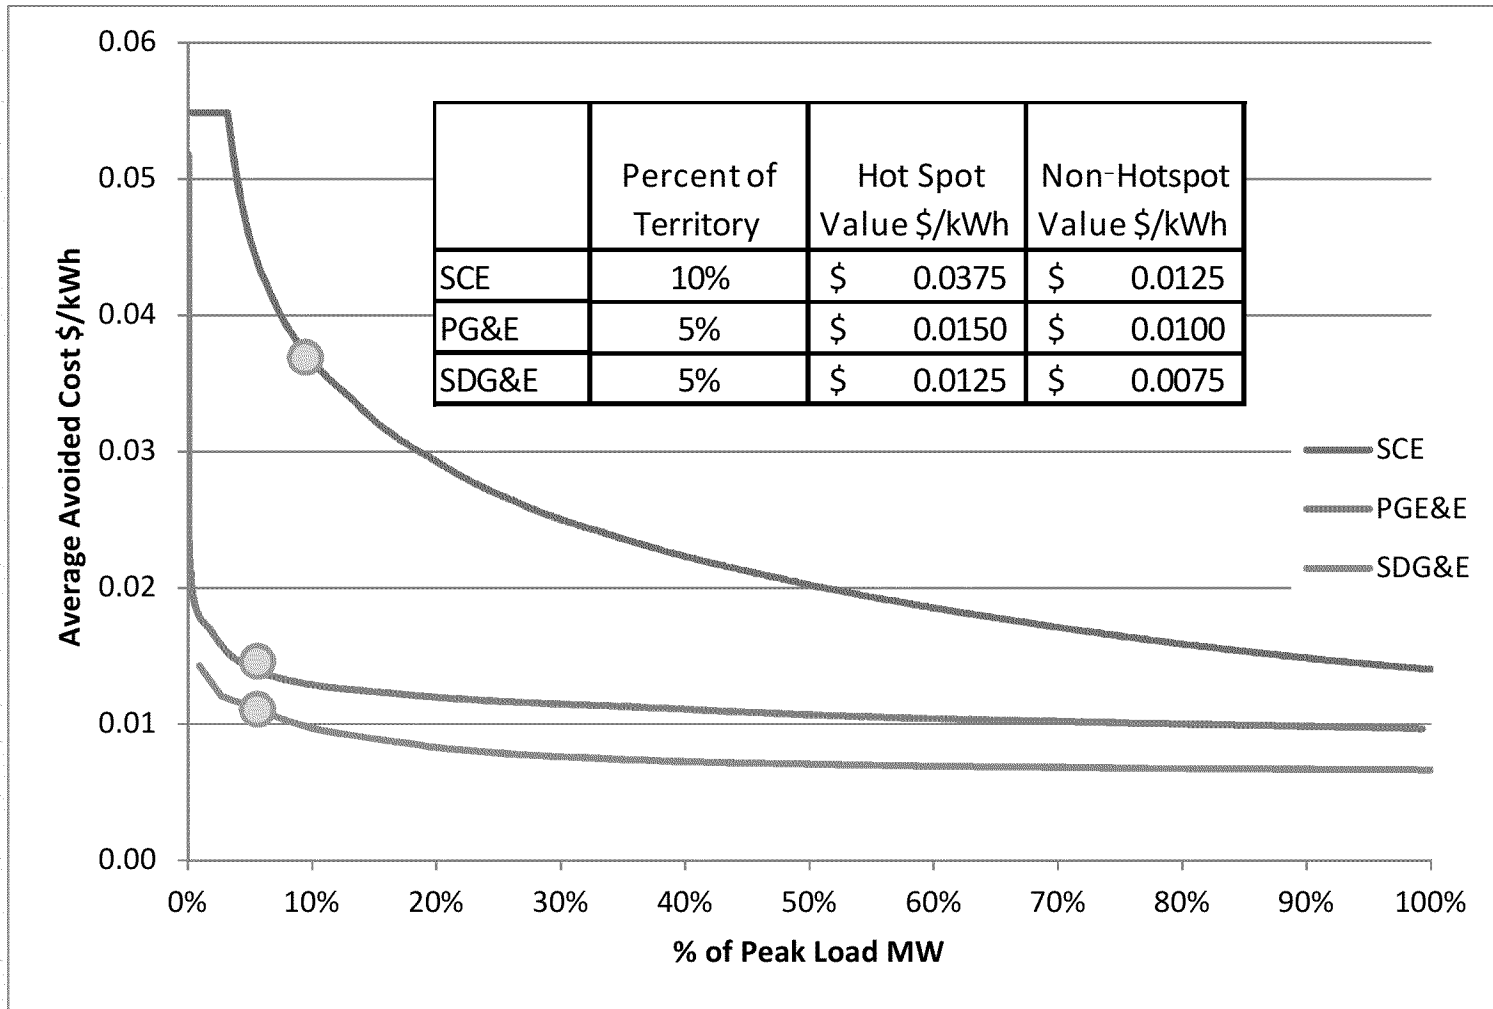

Note: Non-averaged avoided costs shown as semi-transparent line for comparison




Avoided Cost – Non Peaking as Available

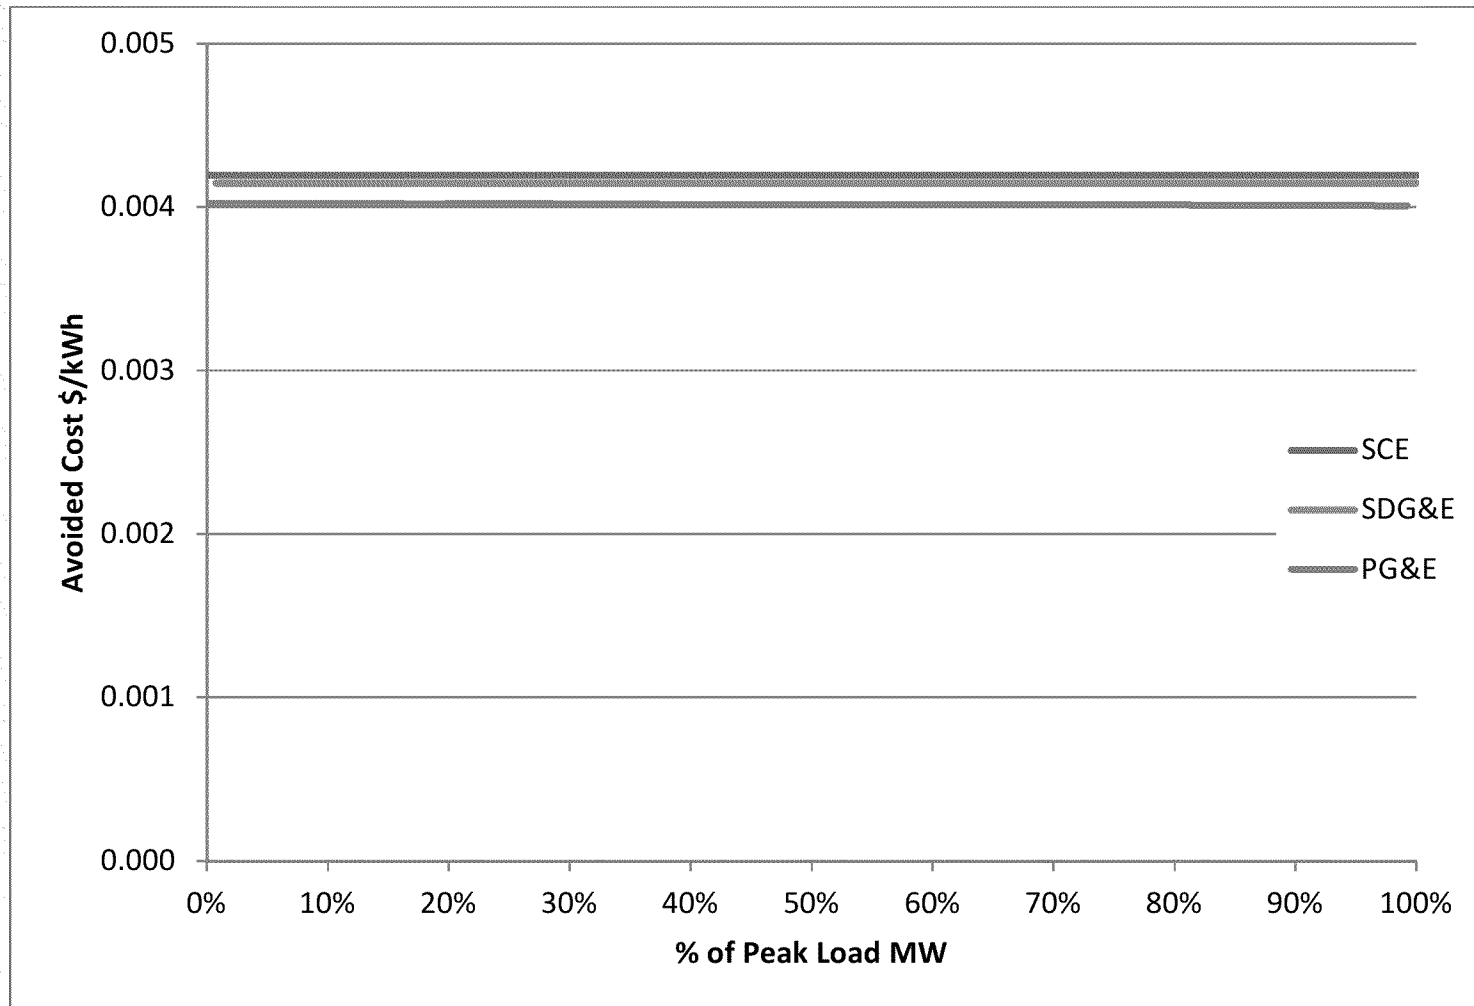



Average Avoided Cost – Non Peaking as Available

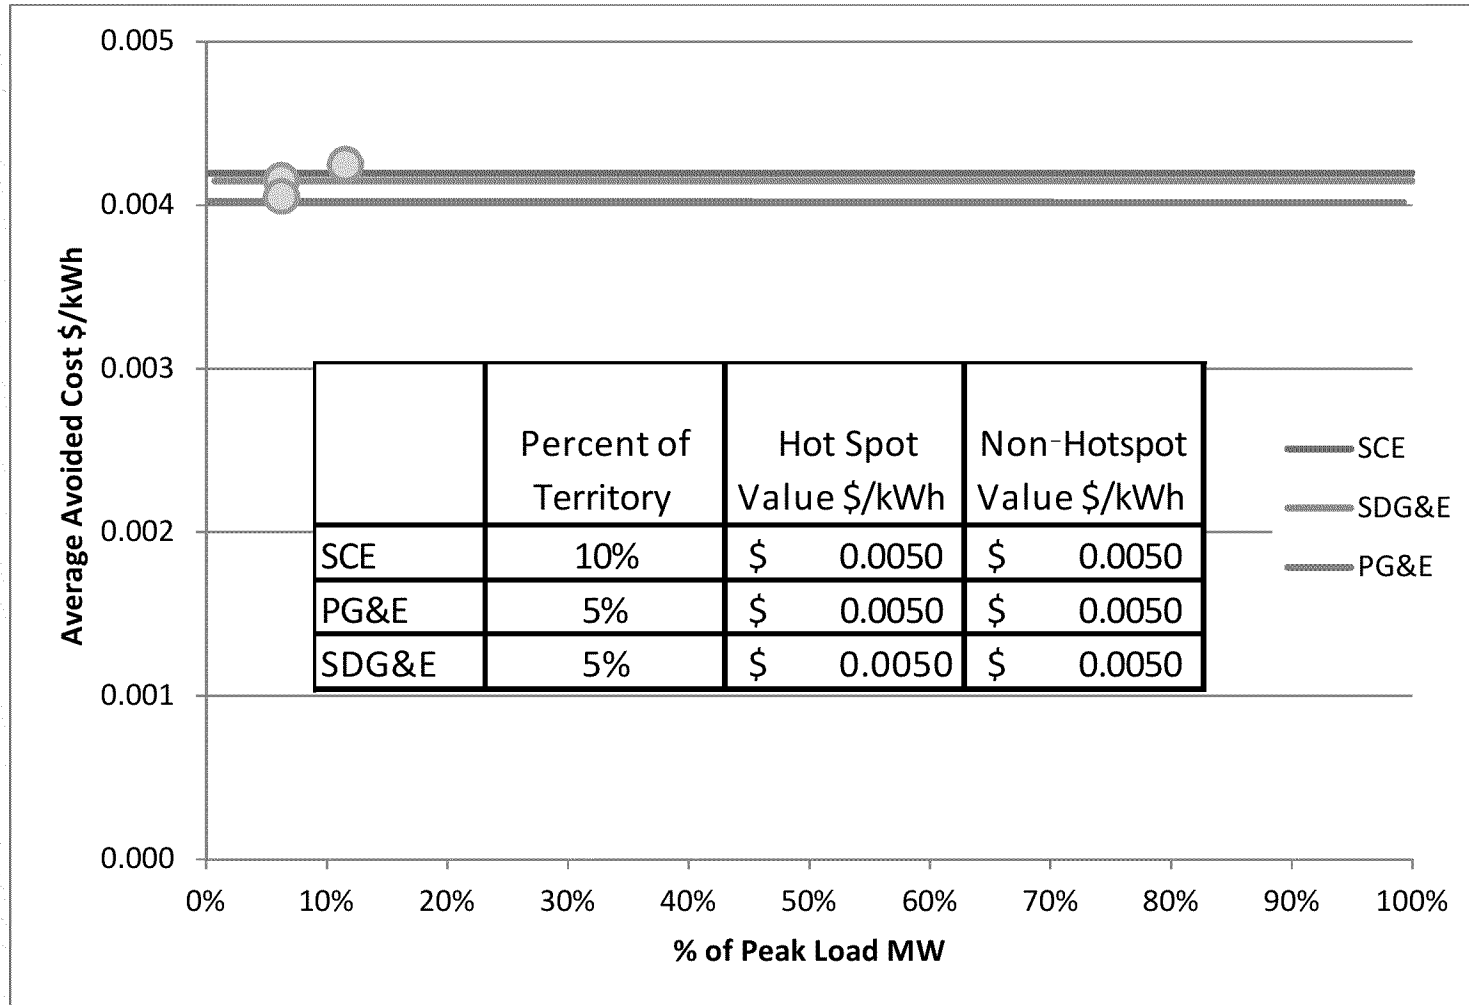

Note: Non-averaged avoided costs shown as semi-transparent line for comparison



Thank You!

Contact Information

Snuller Price, Partner
Energy and Environmental Economics, Inc.

(415)391-5100
snuller@ethree.com